TABLE OF CONTENTS

1	**Before driving**	Adjusting and operating features such as door locks, mirrors, and steering column.
2	**When driving**	Driving, stopping and safe-driving information.
3	**Interior features**	Air conditioning and audio systems, as well as other interior features for a comfortable driving experience.
4	**Maintenance and care**	Cleaning and protecting your vehicle, performing do-it-yourself maintenance, and maintenance information.
5	**When trouble arises**	What to do if the vehicle needs to be towed, gets a flat tire, or is involved in an accident.
6	**Vehicle specifications**	Detailed vehicle information.
	Index	Alphabetical listing of information contained in this manual.

1 Before driving

1-1. Key information
Keys 30

1-2. Opening, closing and locking the doors
Smart entry & start system ... 33
Wireless remote control 59
Side doors 68
Back door 74

1-3. Adjustable components (seats, mirrors, steering wheel)
Front seats 79
Rear seats 80
Head restraints 85
Seat belts 87
Steering wheel 94
Anti-glare inside rear view mirror 96
Outside rear view mirrors..... 98

1-4. Opening and closing the windows
Power windows 100

1-5. Refueling
Opening the fuel tank cap 103

1-6. Theft deterrent system
Engine immobilizer system 107
Double locking system 117
Alarm 119

1-7. Safety information
Correct driving posture..... 122
SRS airbags 124
Airbag manual on-off system 135
Child restraint systems..... 138
Installing child restraints..... 147

2 When driving

2-1. Driving procedures

Driving the vehicle 160
Engine (ignition) switch (vehicles with a smart entry & start system)..... 176
Engine (ignition) switch (vehicles without a smart entry & start system)..... 186
Multidrive 190
Multi-mode Manual Transmission 196
Manual Transmission..... 201
Turn signal lever 204
Parking brake..... 205
Horn 206

2-2. Instrument cluster

Gauges and meters 207
Indicators and warning lights 213
Multi-information display 219

2-3. Operating the lights and wipers

Headlight switch 222
Fog light switch 228
Windshield wiper and washer 230
Rear window wiper and washer 236

2-4. Using other driving systems

Stop & Start system 238
Cruise control 245
Driving assist systems..... 249
Diesel particulate filter system..... 255

2-5. Driving information

Cargo and luggage..... 257
Winter driving tips..... 259
Trailer towing..... 263

3 Interior features

3-1. Using the air conditioning system and defogger

Manual air conditioning system 274
Automatic air conditioning system 280
Power heater 286
Rear window and outside rear view mirror defoggers 288

3-2. Using the audio system

Audio system types..... 290
Using the radio..... 292
Using the CD player..... 296
Playing back MP3 and WMA discs..... 301
Operating an iPod..... 308
Operating a USB memory... 316
Optimal use of the audio system 324
Using the AUX port..... 326
Using the steering wheel audio switches 327

3-3. Using the interior lights

Interior lights list 330
• Personal lights 331
• Personal/interior lights 331
• Interior light 332

3-4. Using the storage features

List of storage features..... 333
• Auxiliary box..... 334
• Glove box..... 334
• Bottle holders..... 336
• Tray..... 337
• Cup holders..... 338

3-5. Other interior features

Sun visors 339
Vanity mirrors 340
Clock 341
Outside temperature display..... 342
Power outlets 343
Seat heaters..... 345
Armrests..... 347
Panoramic roof shade..... 348
Assist grips..... 351
Floor mat..... 352
Luggage compartment features..... 354

4 Maintenance and care

4-1. Maintenance and care

Cleaning and protecting the vehicle exterior 362
Cleaning and protecting the vehicle interior 366

4-2. Maintenance

Maintenance requirements..... 369

4-3. Do-it-yourself maintenance

Do-it-yourself service precautions 372
Hood 375
Positioning a floor jack..... 376
Engine compartment..... 378
Tires..... 392
Tire inflation pressure 395
Wheels..... 397
Air conditioning filter 399
Wireless remote control/ electronic key battery..... 402
Checking and replacing fuses 406
Light bulbs 422

5 When trouble arises

5-1. Essential information

Emergency flashers 432
If your vehicle needs to be towed 433
If you think something is wrong 441
Fuel pump shut off system..... 442

5-2. Steps to take in an emergency

If a warning light turns on or a warning buzzer sounds... 443
If you have a flat tire (vehicles with a spare tire)..... 456
If you have a flat tire (vehicles with an emergency tire puncture repair kit) 469
If the engine will not start ... 486
If the shift lever cannot be shifted from P..... 489
If the shift lever cannot be shifted 490
If you lose your keys 491
If the electronic key does not operate properly..... 492

If the battery is discharged 497
If your vehicle overheats..... 505
If you run out of fuel and the engine stalls 510
If the vehicle becomes stuck 512
If your vehicle has to be stopped in an emergency..... 514

6 Vehicle specifications

6-1. Specifications
Maintenance data (fuel, oil level, etc.)..... 518
Fuel information 533

6-2. Customization
Customizable features 536

Index

Abbreviation list..... 542

Alphabetical index..... 543

What to do if... 557

Exterior

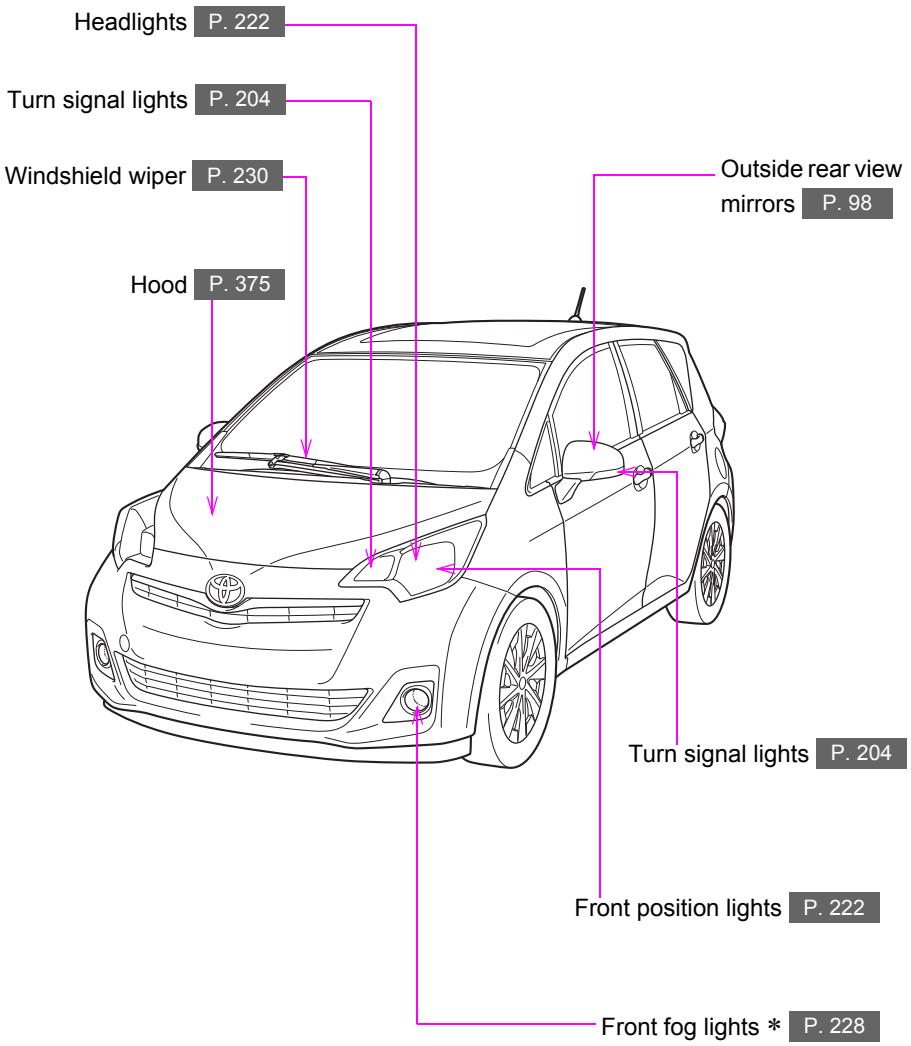
Headlights P. 222
Turn signal lights P. 204
Windshield wiper P. 230
Hood P. 375
Outside rear view mirrors P. 98
Turn signal lights P. 204
Front position lights P. 222
Front fog lights * P. 228

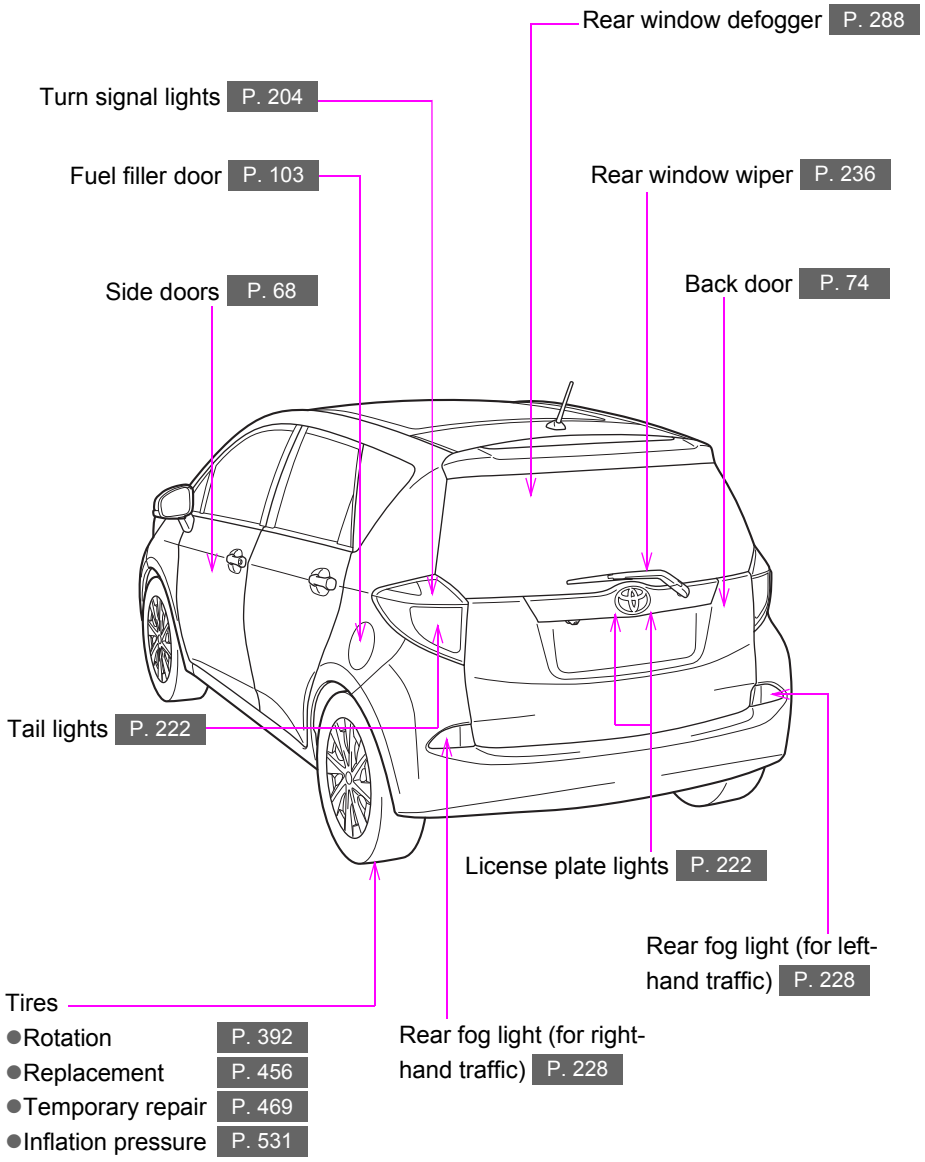
Rear window defogger P. 288
Turn signal lights P. 204
Fuel filler door P. 103
Rear window wiper P. 236
Side doors P. 68
Back door P. 74
Tail lights P. 222
License plate lights P. 222
Rear fog light (for left-hand traffic) P. 228
Tires
●Rotation P. 392
●Replacement P. 456
●Temporary repair P. 469
●Inflation pressure P. 531
Rear fog light (for right-hand traffic) P. 228

*: If equipped

Pictorial index

Interior (Left-hand drive vehicles)

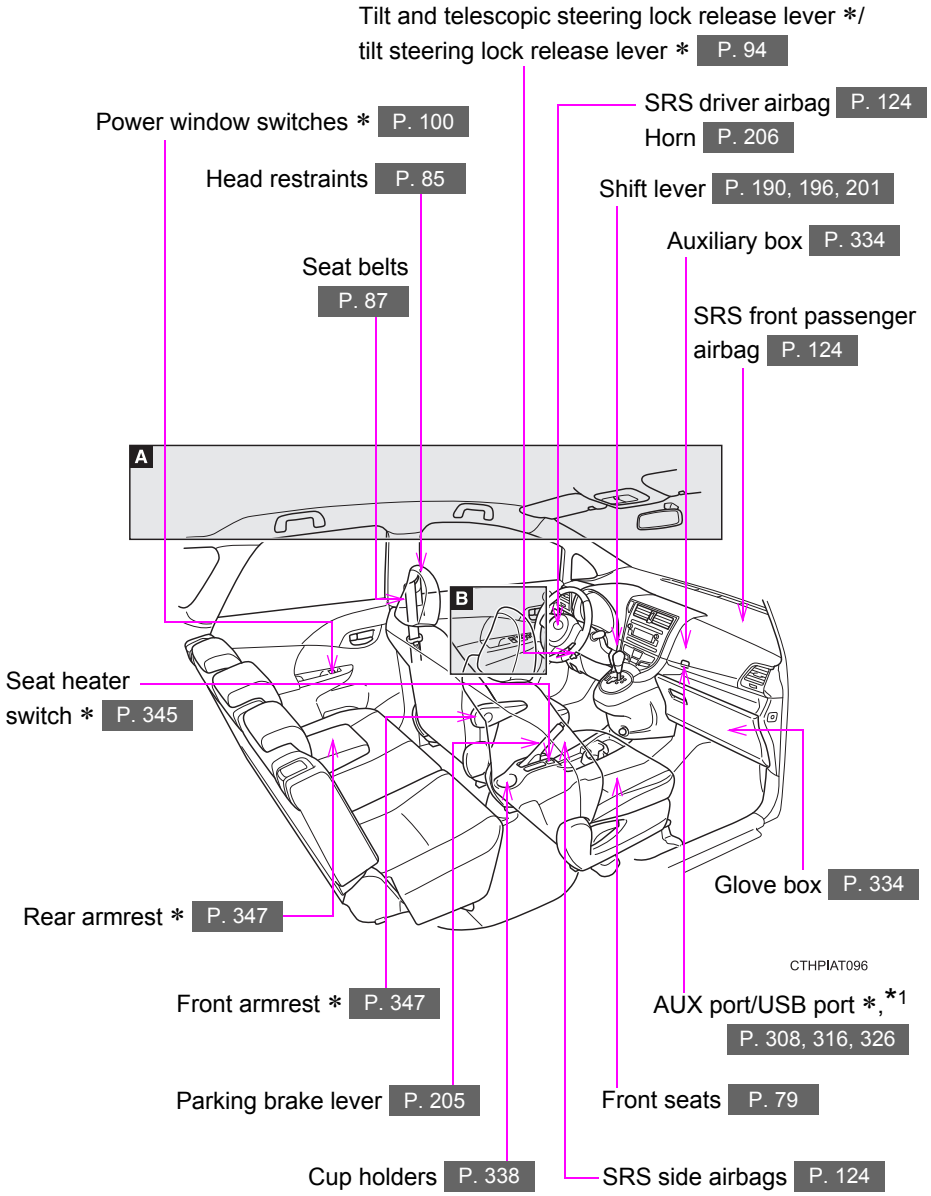

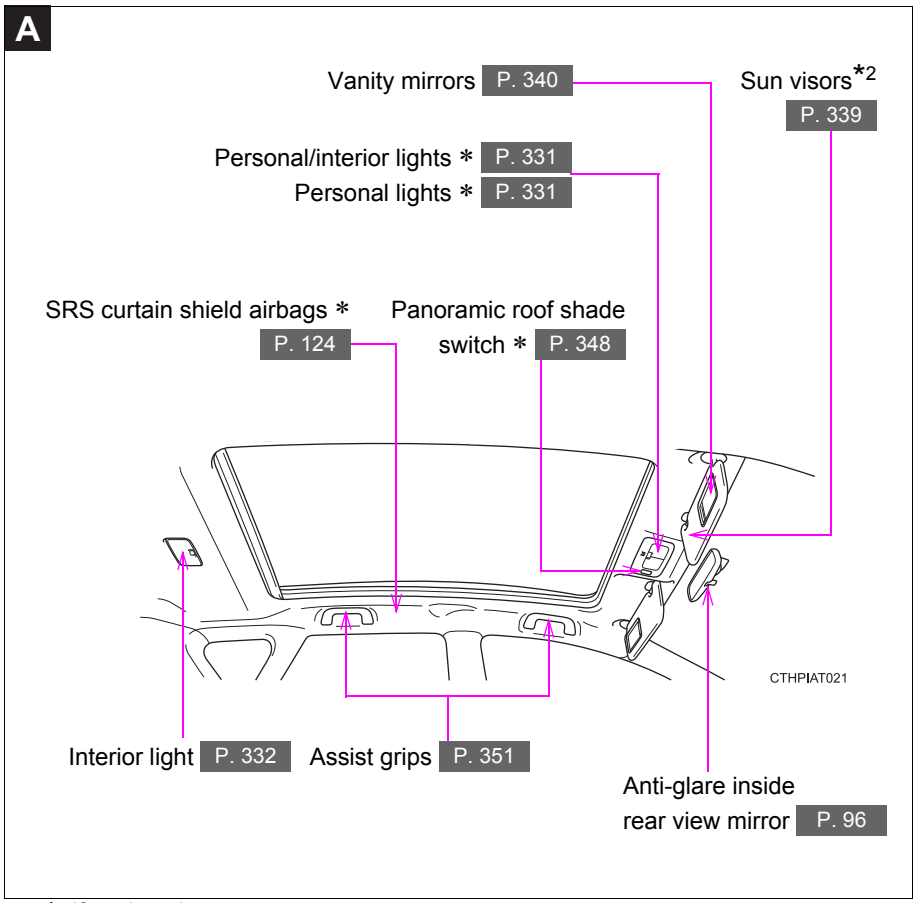

*: If equipped

*1: For vehicles with a navigation/multimedia system, refer to “Navigation and multimedia system Owner’s manual”.

*2: NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur. (→P. 156)

CTNPIAG549

B

Type A

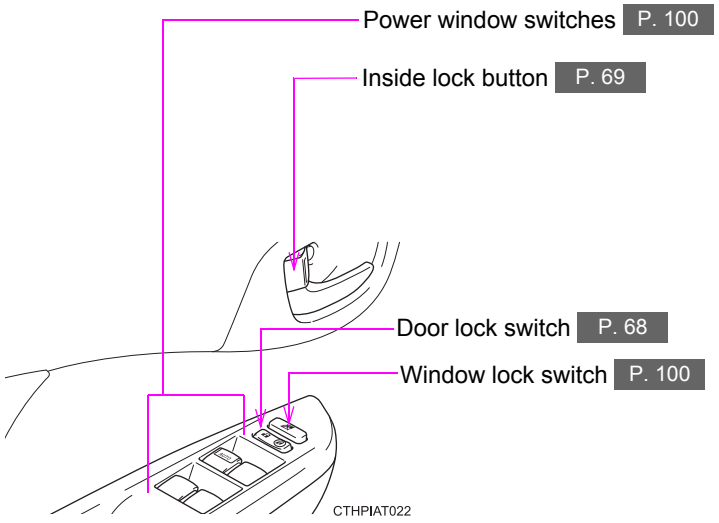

Type B

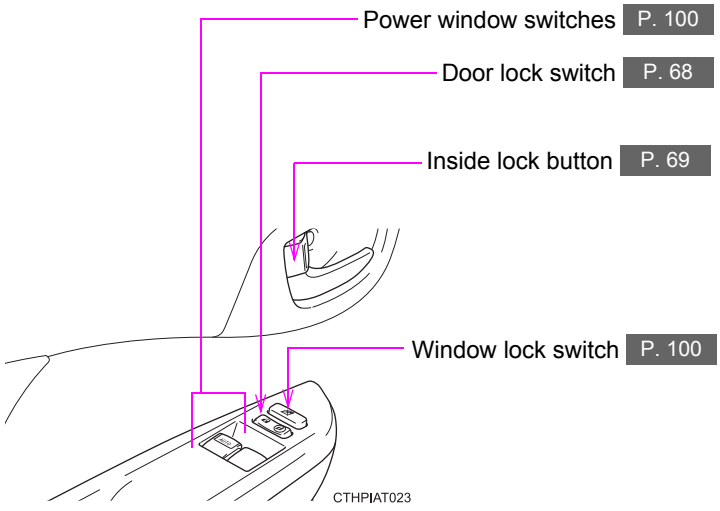

Pictorial index

Instrument panel (Left-hand drive vehicles)

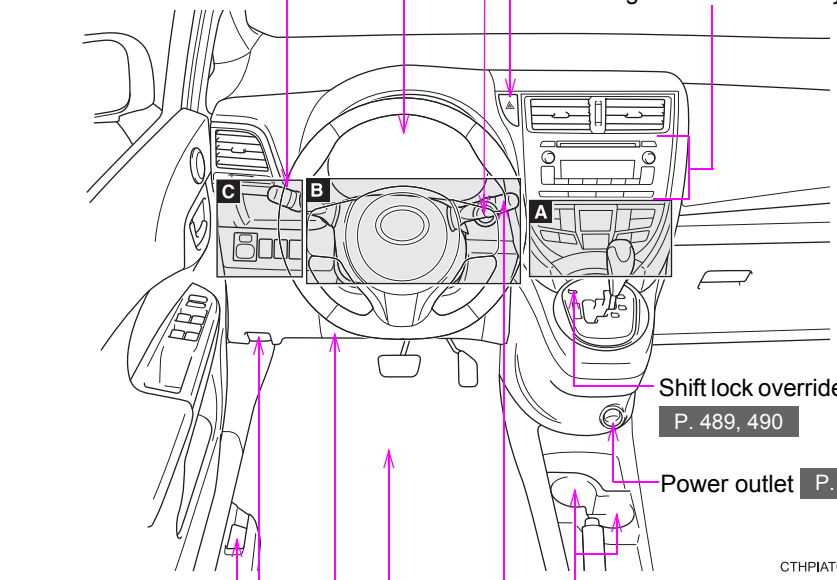

Headlight switch P. 222
Turn signal lever P. 204
Fog light switch P. 228

Gauges and meters P. 207

Engine (ignition) switch (vehicles with a smart entry & start system) P. 176

Emergency flasher switch P. 432

Audio system * P. 290

Navigation/Multimedia system *,*

Shift lock override button * P. 489, 490

Power outlet P. 343

Fuel filler door opener P. 103

Hood lock release lever P. 375

SRS driver knee airbag P. 124

Cup holders P. 338

Windshield wiper and washer switch P. 230, 236

Floor mat P. 352

*: If equipped
*: Refer to “Navigation and multimedia system Owner’s manual”.

Instrument panel (Left-hand drive vehicles)

A

Vehicles with an automatic air conditioning system

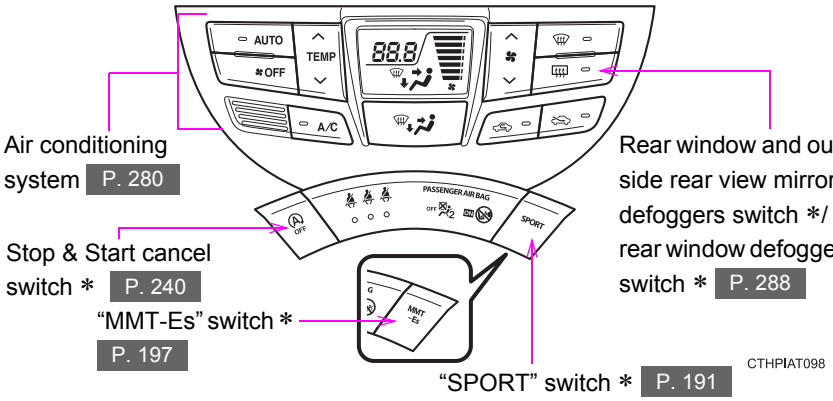

Vehicles with a manual air conditioning system

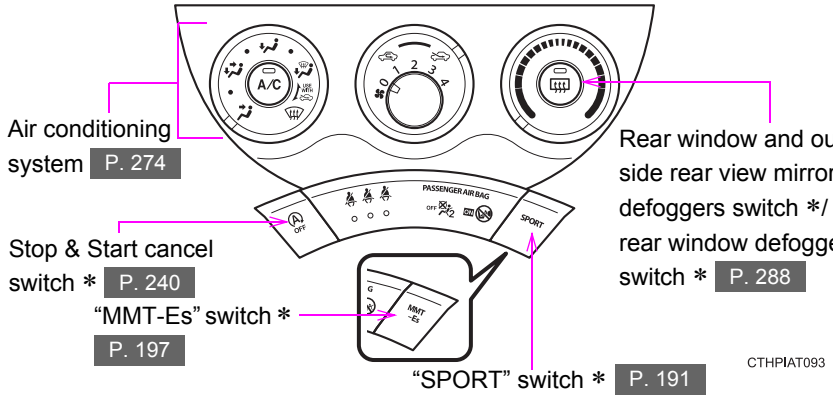

B

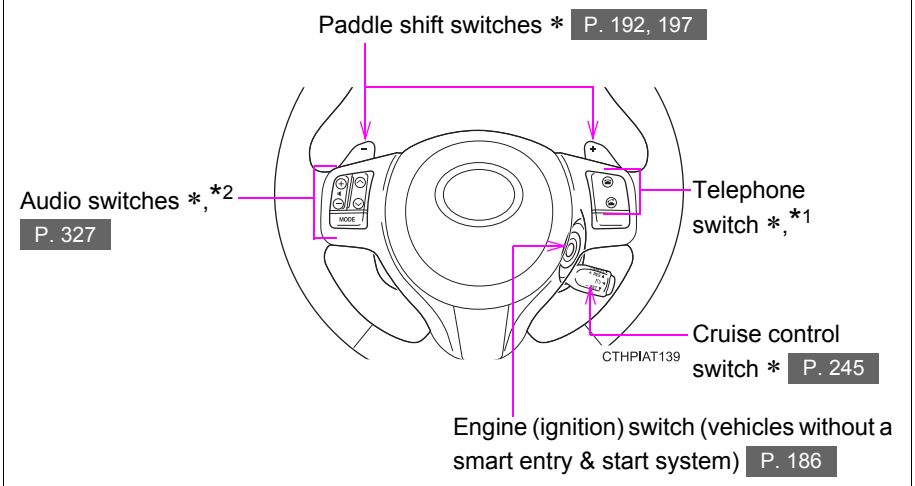

C

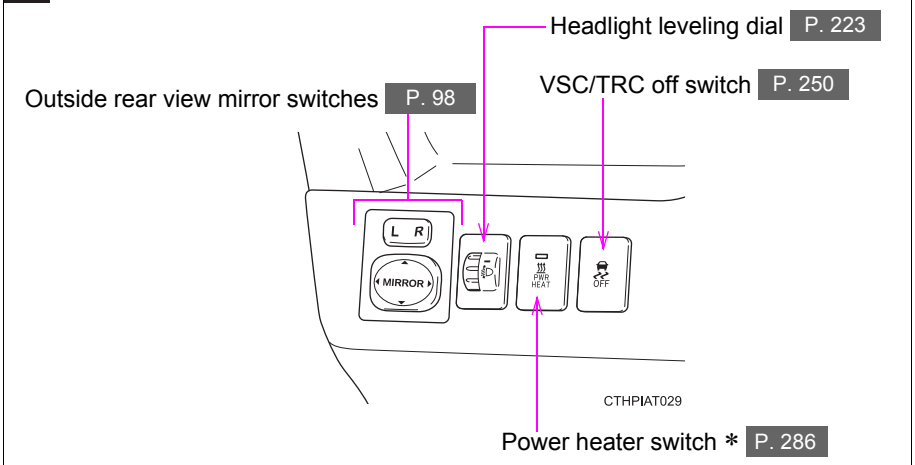

*: If equipped
*1: Refer to “Navigation and multimedia system Owner’s manual”.
*2: For vehicles with a navigation/multimedia system, refer to “Navigation and multimedia system Owner’s manual”.

Pictorial index

Interior (Right-hand drive vehicles)

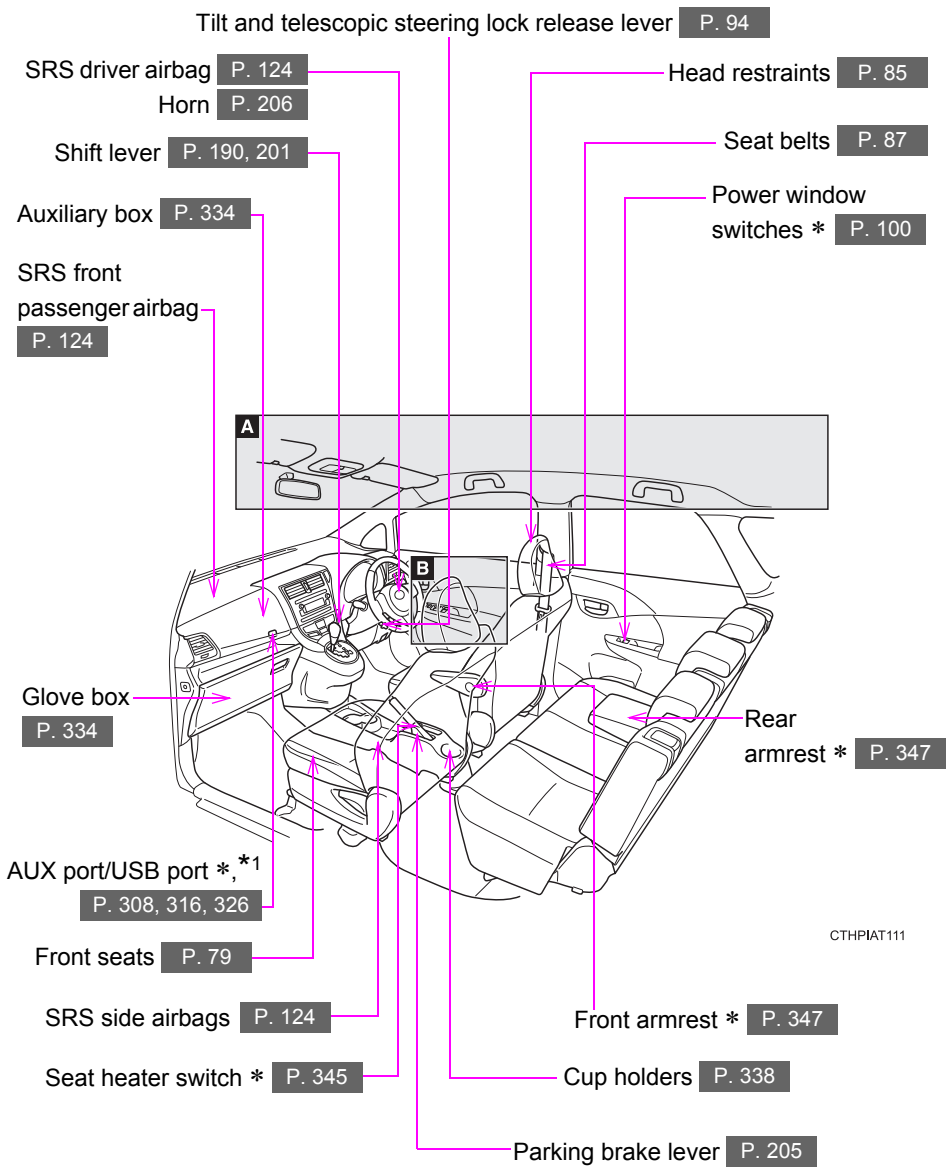

A

Anti-glare inside rear view mirror P. 96

Vanity mirrors P. 340

Sun visors*2 P. 339

Panoramic roof shade switch * P. 348

SRS curtain shield airbags P. 124

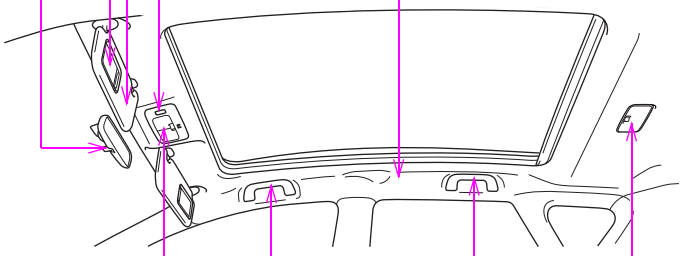

CTHPIAT032

Assist grips P. 351

Personal/interior lights * P. 331

Personal lights * P. 331

Interior light P. 332

*: If equipped

*1: For vehicles with a navigation/multimedia system, refer to “Navigation and multimedia system Owner’s manual”.

*2: NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur. (→P. 156)

CTNPIAG549

B

Type A

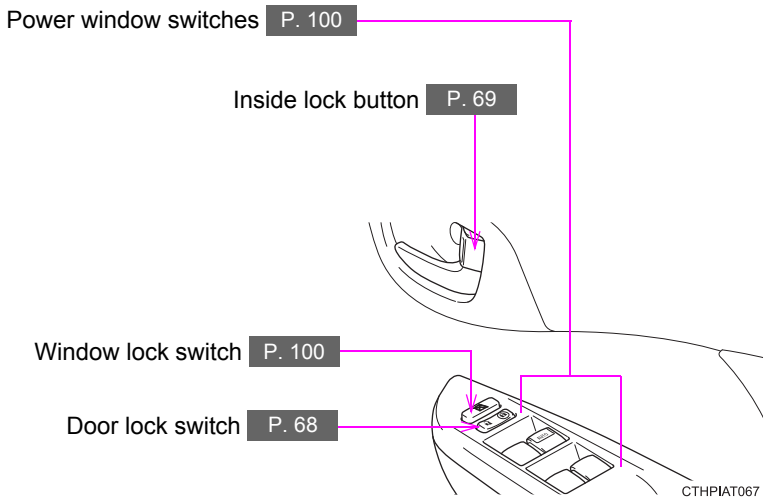

Type B

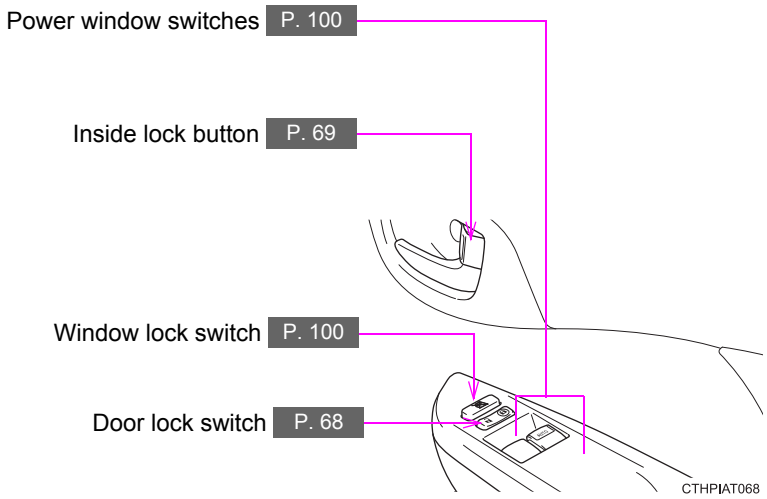

Pictorial index

Instrument panel (Right-hand drive vehicles)

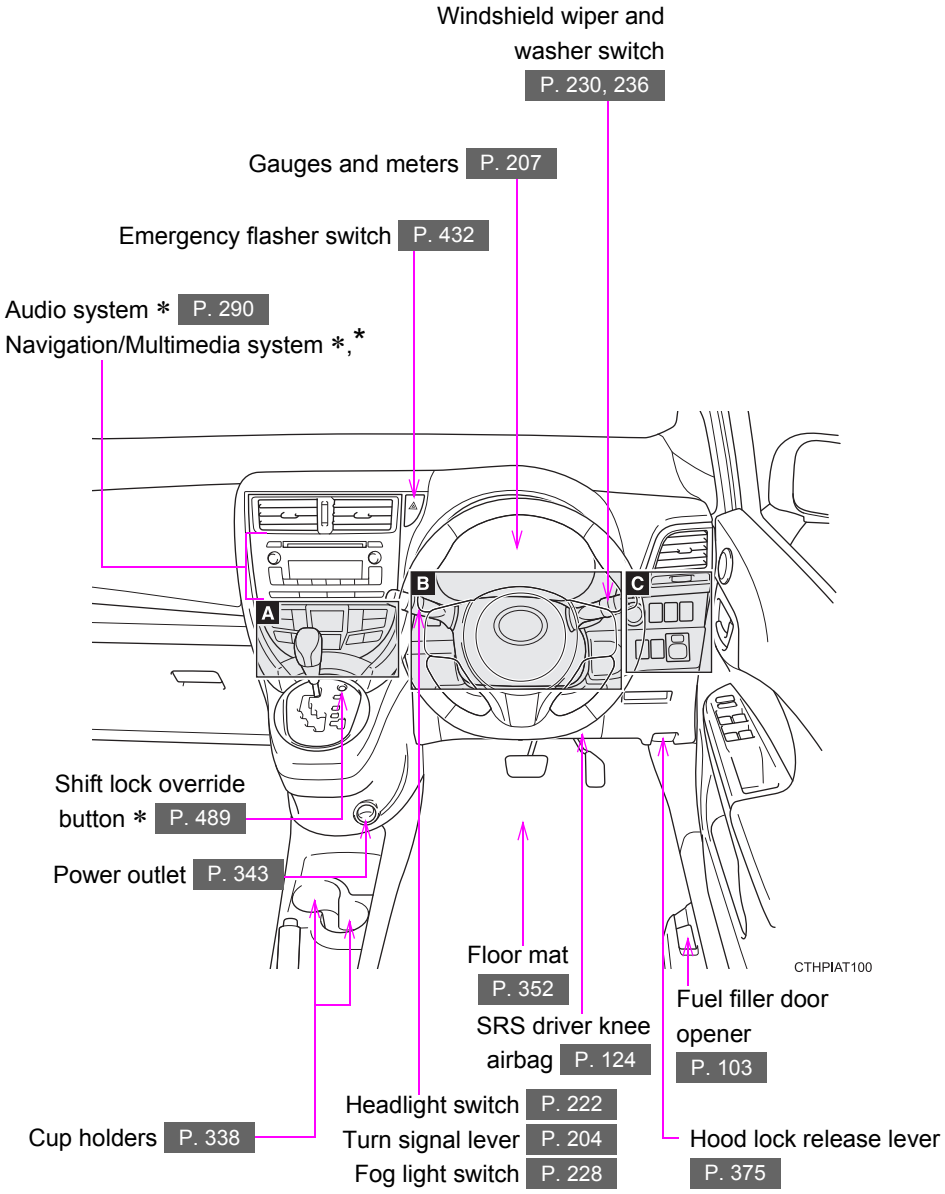

*: If equipped
*: Refer to “Navigation and multimedia system Owner’s manual”.

Instrument panel (Right-hand drive vehicles)

A

Vehicles with an automatic air conditioning system

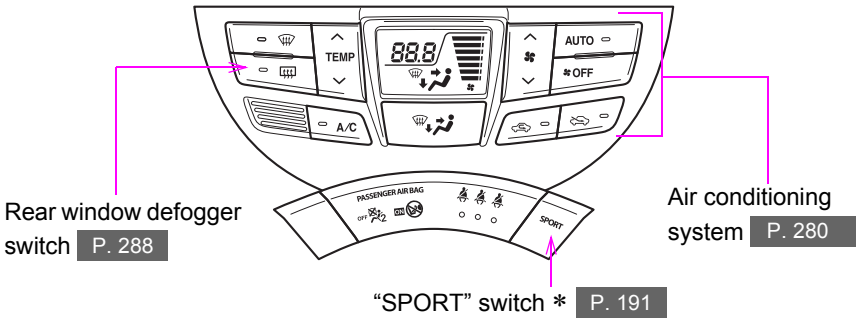

CTHPIAT104

Vehicles with a manual air conditioning system

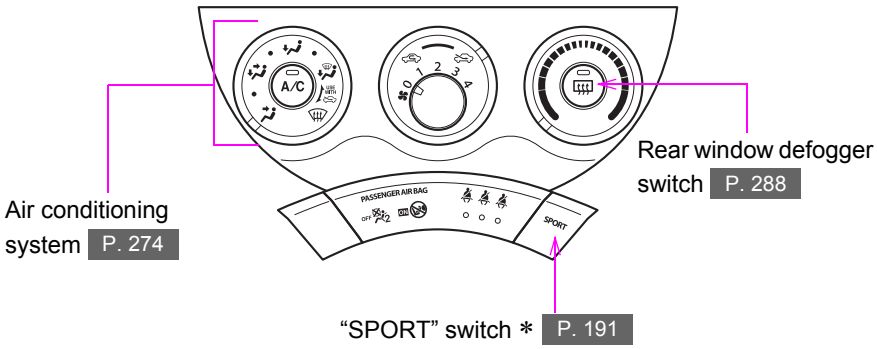

CTHPIAT102

B

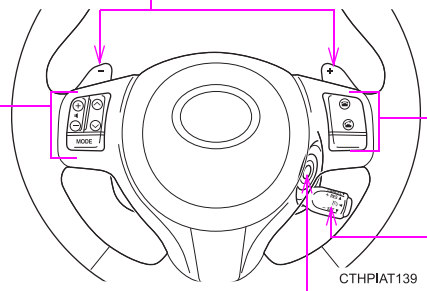

Paddle shift switches * P. 192

Audio switches *,*2 P. 327

Telephone switch *,*1

Cruise control switch * P. 245

Engine (ignition) switch (vehicles without a smart entry & start system) P. 186

C

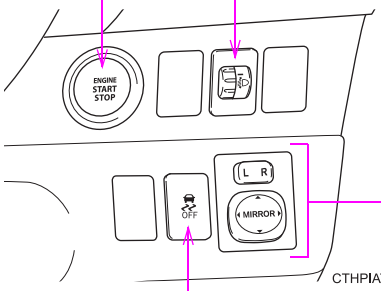

Engine (ignition) switch (vehicles with a smart entry & start system) P. 176

Headlight leveling dial P. 223

Outside rear view mirror switches P. 98

VSC/TRC off switch P. 250

*: If equipped
*1: Refer to “Navigation and multimedia system Owner’s manual”.
*2: For vehicles with a navigation/multimedia system, refer to “Navigation and multimedia system Owner’s manual”.

Luggage compartment

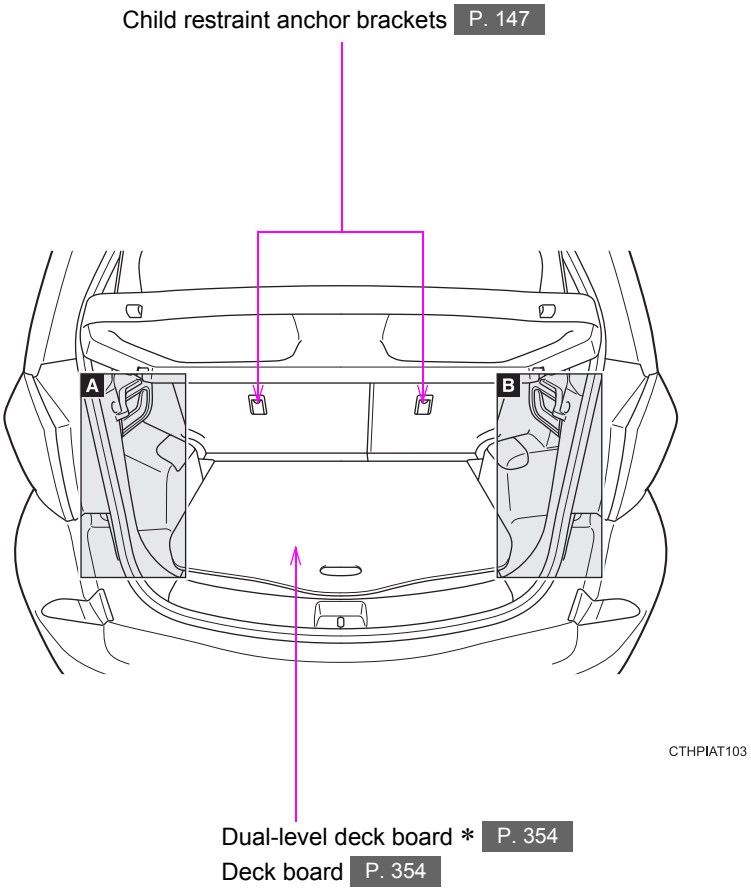

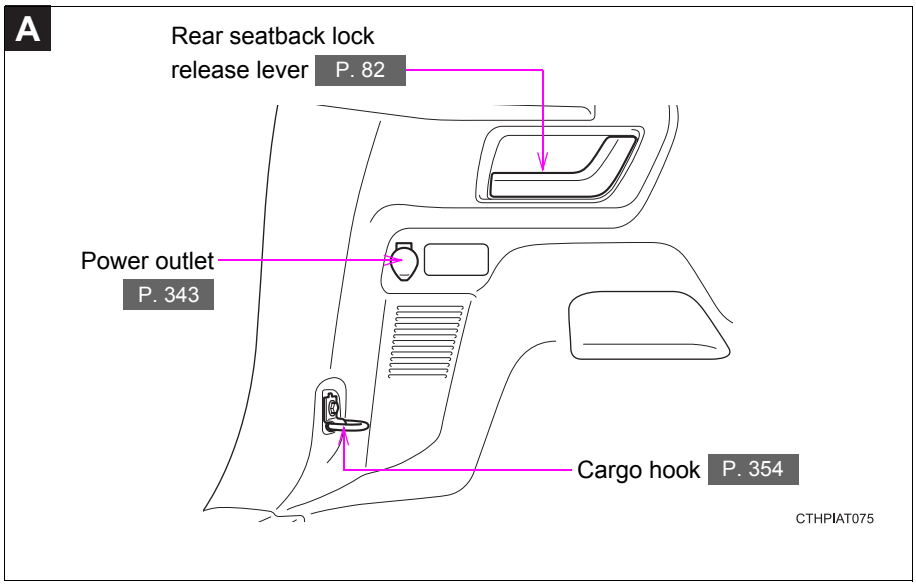
A
Rear seatback lock release lever P. 82
Power outlet P. 343
Cargo hook P. 354
CTHPIAT075

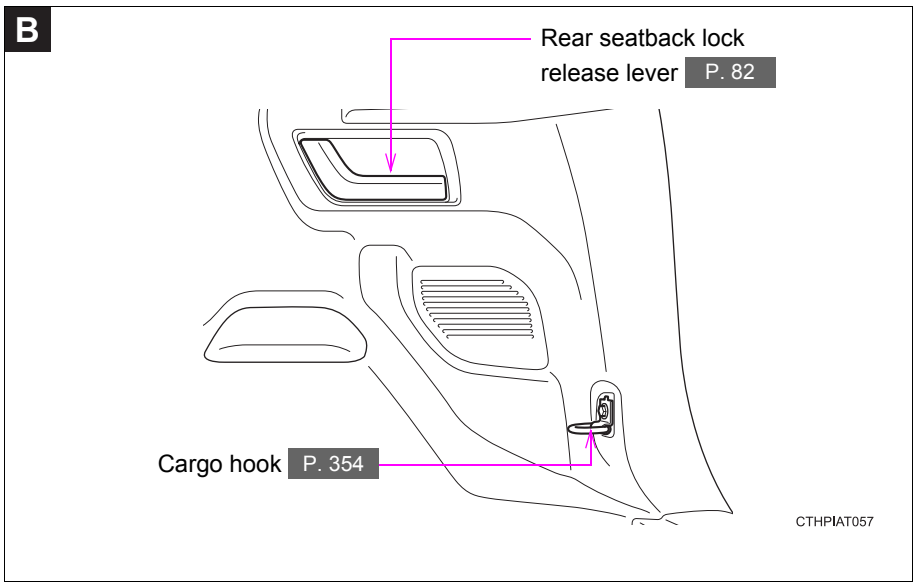
B
Rear seatback lock release lever P. 82
Cargo hook P. 354
CTHPIAT057

*: If equipped

For your information

Main Owner's Manual

Please note that this manual applies to all models and all equipment, including options. Therefore, you may find some explanations for equipment not installed on your vehicle.

All specifications provided in this manual are current at the time of printing. However, because of the Toyota policy of continual product improvement, we reserve the right to make changes at any time without notice.

Depending on specifications, the vehicle shown in the illustrations may differ from your vehicle in terms of equipment.

Accessories, spare parts and modification of your Toyota

Both genuine Toyota and a wide variety of other spare parts and accessories for Toyota vehicles are currently available on the market. Should it be determined that any of the genuine Toyota parts or accessories supplied with the vehicle need to be replaced, Toyota recommends that genuine Toyota parts or accessories, be used to replace them. Other parts or accessories of matching quality can also be used. Toyota cannot accept any liability or guarantee spare parts and accessories which are not genuine Toyota products, nor for replacement or installation involving such parts. In addition, damage or performance problems resulting from the use of non-genuine Toyota spare parts or accessories may not be covered under warranty.

Installation of an RF-transmitter system

The installation of an RF-transmitter system in your vehicle could affect electronic systems such as:

- Multiport fuel injection system/sequential multiport fuel injection system
- Cruise control system
- Anti-lock brake system
- SRS airbag system
- Seat belt pretensioner system

Be sure to check with any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for precautionary measures or special instructions regarding installation of an RF-transmitter system.

Further information regarding frequency bands, power levels, antenna positions and installation provisions for the installation of RF-transmitters, is available on request at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Scrapping of your Toyota

The SRS airbag and seat belt pretensioner devices in your Toyota contain explosive chemicals. If the vehicle is scrapped with the airbags and seat belt pretensioners left as they are, this may cause an accident such as fire. Be sure to have the systems of the SRS airbag and seat belt pretensioner removed and disposed of by a qualified service shop or by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, before you scrap your vehicle.

Your vehicle contains batteries and/or accumulators. Do not discard them into the environment but cooperate with separate collection (Directive 2006/66/EC).

CAUTION

General precautions while driving

Driving under the influence: Never drive your vehicle when under the influence of alcohol or drugs that have impaired your ability to operate your vehicle. Alcohol and certain drugs delay reaction time, impair judgment and reduce coordination, which could lead to an accident that could result in death or serious injury.

Defensive driving: Always drive defensively. Anticipate mistakes that other drivers or pedestrians might make and be ready to avoid accidents.

Driver distraction: Always give your full attention to driving. Anything that distracts the driver, such as adjusting controls, talking on a cellular phone or reading can result in a collision with resulting death or serious injury to you, your occupants or others.

General precaution regarding children's safety

Never leave children unattended in the vehicle, and never allow children to have or use the key.

Children may be able to start the vehicle or shift the vehicle into neutral. There is also a danger that children may injure themselves by playing with the windows, the panoramic roof shade, or other features of the vehicle. In addition, heat build-up or extremely cold temperatures inside the vehicle can be fatal to children.

Symbols used throughout this manual

Cautions & Notices

CAUTION

This is a warning against something which, if ignored, may cause death or serious injury to people. You are informed about what you must or must not do in order to reduce the risk of death or serious injury to yourself and others.

NOTICE

This is a warning against something which, if ignored, may cause damage to the vehicle or its equipment. You are informed about what you must or must not do in order to avoid or reduce the risk of damage to your Toyota and its equipment.

Symbols used in illustrations

Safety symbol

The symbol of a circle with a slash through it means “Do not”, “Do not do this”, or “Do not let this happen”.



Arrows indicating operations

Indicates the action (pushing, turning, etc.) used to operate switches and other devices.

Indicates the outcome of an operation (e.g. a lid opens).

Before driving 1

1-1. Key information

Keys 30

1-2. Opening, closing and locking the doors

Smart entry & start system 33

Wireless remote control 59

Side doors 68

Back door 74

1-3. Adjustable components (seats, mirrors, steering wheel)

Front seats 79

Rear seats 80

Head restraints 85

Seat belts 87

Steering wheel 94

Anti-glare inside rear view mirror 96

Outside rear view mirrors ... 98

1-4. Opening and closing the windows

Power windows 100

1-5. Refueling

Opening the fuel tank cap 103

1-6. Theft deterrent system

Engine immobilizer system 107

Double locking system 117

Alarm 119

1-7. Safety information

Correct driving posture 122

SRS airbags 124

Airbag manual on-off system 135

Child restraint systems 138

Installing child restraints ... 147

Keys

The following keys are provided with the vehicle.

Vehicles without a smart entry & start system (type A)

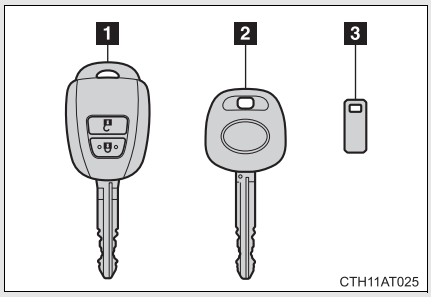

1 Key (with a wireless remote control function)

Operating the wireless remote control function (→P. 59)

2 Key (without a wireless remote control function)

3 Key number plate

Vehicles without a smart entry & start system (type B)

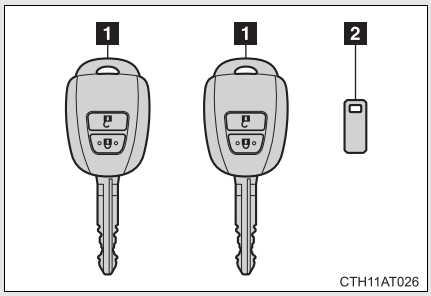

1 Keys

Operating the wireless remote control function (→P. 59)

2 Key number plate

Vehicles with a smart entry & start system

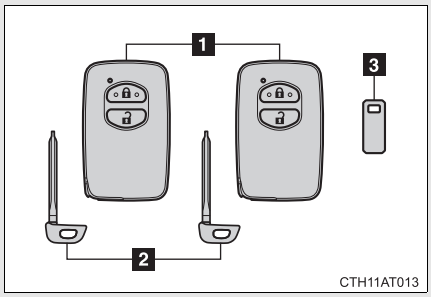

1 Electronic keys

- Operating the smart entry & start system (→P. 33)
- Operating the wireless remote control function (→P. 59)

2 Mechanical keys

3 Key number plate

Using the mechanical key (vehicles with a smart entry & start system)

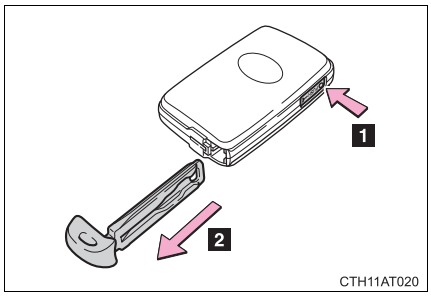

To take out the mechanical key, push the release button and take the key out.

After using the mechanical key, store it in the electronic key. Carry the mechanical key together with the electronic key. If the electronic key battery is depleted or the entry function does not operate properly, you will need the mechanical key. (→P. 492)

Key number plate

Keep the plate in a safe place such as your wallet, not in the vehicle. In the event that a key (without a smart entry & start system) or mechanical key (with a smart entry & start system) is lost, a new key can be made by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional using the key number plate. (→P. 491)

When riding in an aircraft

When bringing a key with wireless remote control function onto an aircraft, make sure you do not press any buttons on the key while inside the aircraft cabin. If you are carrying the key in your bag etc., ensure that the buttons are not likely to be pressed accidentally. Pressing a button may cause the key to emit radio waves that could interfere with the operation of the aircraft.

NOTICE

To prevent key damage

Observe the following:

- Do not drop the keys, subject them to strong shocks or bend them.
- Do not expose the keys to high temperatures for a long period of time.
- Do not get the keys wet or wash them in an ultrasonic washer etc.
- Vehicles with a smart entry & start system: Do not attach metallic or magnetic materials to the keys or place the keys close to such materials.
- Do not disassemble the keys.
- Do not attach a sticker or anything else to the surface of the key.
- Vehicles with a smart entry & start system: Do not place the keys near objects that produce magnetic fields, such as TVs, audio systems, induction cookers, or medical electrical equipment, such as low-frequency therapy equipment.

Carrying the electronic key on your person (vehicles with a smart entry & start system)

Carry the electronic key 10 cm (3.9 in.) or more away from electric appliances that are turned on. Radio waves emitted from electric appliances within 10 cm (3.9 in.) of the electronic key may interfere with the key, causing the key to not function properly.

In case of a smart entry & start system malfunction or other key-related problems (vehicles with a smart entry & start system)

Take your vehicle with all the electronic keys provided with your vehicle to any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

When a vehicle key is lost (vehicles with a smart entry & start system)

If the key remains lost, the risk of vehicle theft increases significantly. Visit any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately with all remaining electronic keys that was provided with your vehicle.

Smart entry & start system*

The following operations can be performed simply by carrying the electronic key on your person, for example in your pocket.
(The driver should always carry the electronic key.)

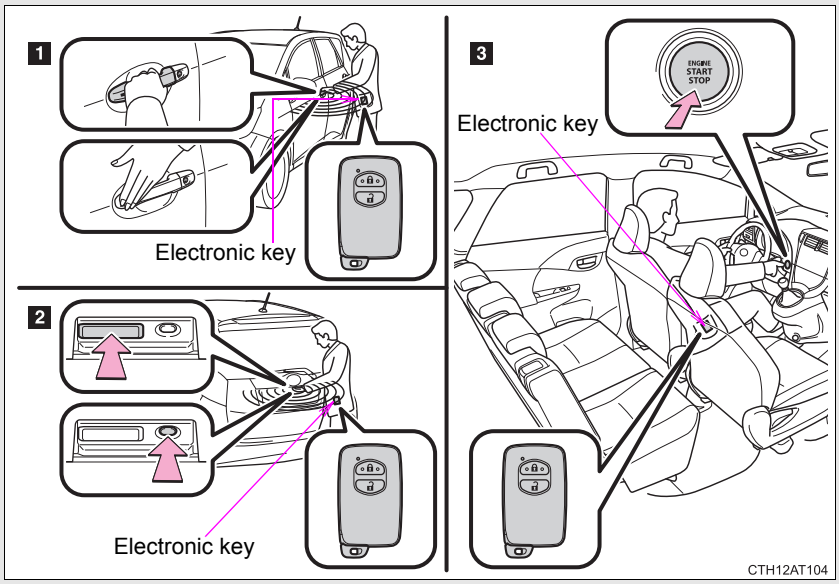

1 Unlocks and locks the side doors (→P. 34)
2 Unlocks and locks the back door (→P. 35)
3 Starts the engine (→P. 176)

*: If equipped

Unlocking and locking the side doors (front door handles only)

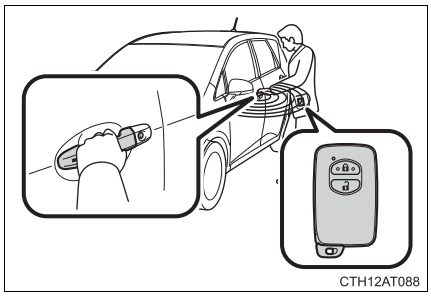

Grip the handle to unlock the doors.

Make sure to touch the sensor on the back of the handle.

The doors cannot be unlocked for 3 seconds after the doors are locked.

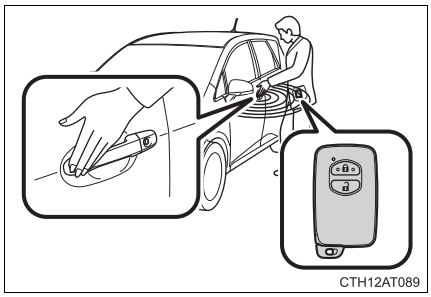

Touch the lock sensor (the indentation on the side of the door handle) to lock the doors.

Unlocking and locking the back door

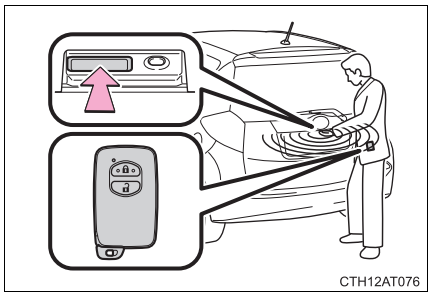

Press the button to unlock the door.

The door cannot be unlocked for 3 seconds after the door is locked.

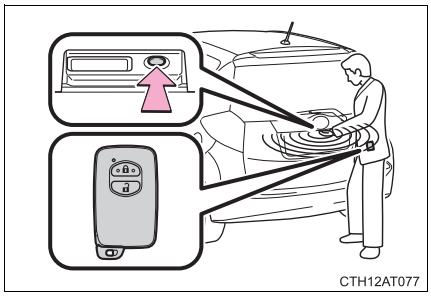

Press the button to lock the door.

Antenna location and effective range

Antenna location

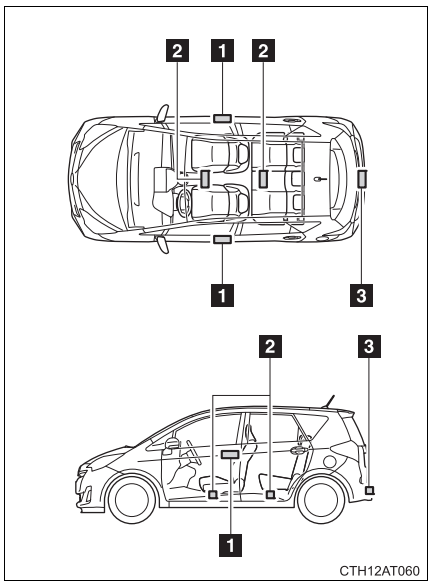

1 Antennas outside the cabin

2 Antennas inside the cabin

3 Antenna outside the luggage compartment

■ **Effective range (areas within which the electronic key is detected)**

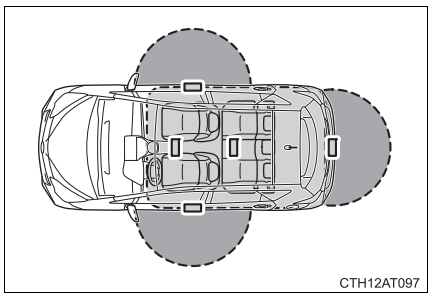

When locking or unlocking the doors

The system can be operated when the electronic key is within about 0.7 m (2.3 ft.) either of the outside front door handles and back door. (Only the doors detecting the key can be operated.)

When starting the engine or changing “ENGINE START STOP” switch modes

The system can be operated when the electronic key is inside the vehicle.

■ **Operation signals**

The emergency flashers flash to indicate that the doors have been locked/unlocked. (Locked: once; Unlocked: twice)

■ **When the door cannot be locked by the lock sensor**



Use your palm to touch the lock sensor.

■ **Alarms and warning indicators**

A combination of exterior and interior alarms as well as warning lights are used to prevent theft of the vehicle and unforeseeable accidents resulting from erroneous operation. Take appropriate measures for the warning light that comes on. (→P. 451)

The following table describes circumstances and correction procedures when only alarms are sounded.

Alarm	Situation	Correction procedure
Exterior alarm sounds once for 10 seconds	An attempt was made to lock the doors using the smart entry & start system while the electronic key was still inside the vehicle.	Retrieve the electronic key from the vehicle and lock the doors again.
	An attempt was made to lock the vehicle while a door was open.	Close all of the doors and lock the doors again.
Interior alarm pings once and exterior alarm sounds once for 10 seconds	An attempt was made to lock either front door by opening a door and putting the inside lock button into the lock position, then closing the door by pulling on the outside door handle with the electronic key still inside the vehicle.	Retrieve the electronic key from the vehicle and lock the doors again.
Interior alarm pings once and exterior alarm sounds once for 10 seconds (on some models)	An attempt was made to lock the doors other than using the smart entry & start system while the electronic key was still inside the vehicle.	Retrieve the electronic key from the vehicle and lock the doors again.
Interior alarm sounds continuously	The “ENGINE START STOP” switch was turned to ACCESSORY mode while the driver’s door was open (or the driver’s door was opened while the “ENGINE START STOP” switch was in ACCESSORY mode).	Turn the “ENGINE START STOP” switch off and close the driver’s door.

Alarm	Situation	Correction procedure
Interior alarm sounds continuously*	The driver's door was opened while any shift position other than P was selected without turning off the "ENGINE START STOP" switch.	Shift the shift lever to P.

*: Vehicles with a Multidrive only

■ **Security feature**

If a door is not opened within approximately 30 seconds after the vehicle is unlocked, the security feature automatically locks the vehicle again. (However, depending on the location of the electronic key, the key may be detected as being in the vehicle. In this case, vehicle may be unlocked.)

■ **Battery-saving function**

The battery-saving function will be activated in order to prevent the electronic key battery and the vehicle battery from being discharged while the vehicle is not in operation for a long time.

- In the following situations, the smart entry & start system may take some time to unlock the doors.
  - The electronic key has been left in an area of approximately 2 m (6 ft.) of the outside of the vehicle for 10 minutes or longer.
  - The smart entry & start system has not been used for 5 days or longer.
- If the smart entry & start system has not been used for 14 days or longer, the doors cannot be unlocked at any doors except the driver's door.
  In this case, take hold of the driver's door handle, or use the wireless remote control or the mechanical key, to unlock the doors.

Conditions affecting operation

The smart entry & start system uses weak radio waves. In the following situations, the communication between the electronic key and the vehicle may be affected, preventing the smart entry & start system, wireless remote control and engine immobilizer system from operating properly.
(Way of coping →P. 492)

- When the electronic key battery is depleted
- Near a TV tower, electric power plant, gas station, radio station, large display, airport or other facility that generates strong radio waves or electrical noise
- When the electronic key is in contact with, or is covered by the following metallic objects
  - Cards to which aluminum foil is attached
  - Cigarette boxes that have aluminum foil inside
  - Metallic wallets or bags
  - Coins
  - Hand warmers made of metal
  - Media such as CDs and DVDs
- When other wireless key (that emit radio waves) is being used nearby
- When carrying the electronic key together with the following devices that emit radio waves
  - A portable radio, cellular phone, cordless phone or other wireless communication device
  - Another vehicle's electronic key or a wireless key that emits radio waves
  - Personal computers or personal digital assistants (PDAs)
  - Digital audio players
  - Portable game systems
- If window tint with a metallic content or metallic objects are attached to the rear window
- When the electronic key is placed near a battery charger or electronic devices

Notes for the entry function

- Even when the electronic key is within the effective range (detection areas), the system may not operate properly in the following cases:
  - The electronic key is too close to the window or outside door handle, near the ground, or in a high place when the doors are locked or unlocked.
  - The electronic key is on the instrument panel, luggage cover (if equipped) or floor, or in the door pockets or glove box when the engine is started or “ENGINE START STOP” switch modes are changed.
- Do not leave the electronic key on top of the instrument panel or near the door pockets when exiting the vehicle. Depending on the radio wave reception conditions, it may be detected by the antenna outside the cabin and the door will become lockable from the outside, possibly trapping the electronic key inside the vehicle.
- As long as the electronic key is within the effective range, the doors may be locked or unlocked by anyone.
- Even if the electronic key is not inside the vehicle, it may be possible to start the engine if the electronic key is near the window.
- The doors may unlock if a large amount of water splashes on the door handle, such as in the rain or in a car wash when the electronic key is within the effective range. (The door will automatically be locked after approximately 30 seconds if the doors are not opened and closed.)
- Gripping the door handle when wearing a glove may not unlock the door.
- If the wireless remote control is used to lock the doors when the electronic key is near the vehicle, there is a possibility that the door may not be unlocked by the entry function. (Use the wireless remote control to unlock the doors.)
- A sudden approach to the effective range or door handle may prevent the doors from being unlocked. In this case, return the door handle to the original position and check that the doors unlock before pulling the door handle again.

Notes for locking the doors

- Touching the door lock sensor while wearing gloves may delay or prevent lock operation. Remove the gloves and touch the lock sensor again.
- When the lock operation is performed using the lock sensor, recognition signals will be shown up to two consecutive times. After this, no recognition signals will be given.
- If the door handle becomes wet while the electronic key is within the effective range, the door may lock and unlock repeatedly. Place the key in a position 2 m (6 ft.) or more separate from the vehicle while the vehicle is being washed. (Take care to ensure that the key is not stolen.)
- If the electronic key is inside the vehicle and a door handle becomes wet during a car wash, a buzzer will sound outside the vehicle. To turn off the alarm, lock all the doors.
- The lock sensor may not work properly if it comes into contact with ice, snow, mud, etc. Clean the lock sensor and attempt to operate it again.

Notes for the unlocking function

- A sudden approach to the effective range or door handle may prevent the doors from being unlocked. In this case, return the door handle to the original position and check that the doors unlock before pulling the door handle again.
- Gripping the door handle when wearing a glove may not unlock the door. Remove the gloves and touch the sensor on the back of the handle again.
- If the door handle becomes wet while the electronic key is within the effective range, the door may lock and unlock repeatedly. Place the key in a position 2 m (6 ft.) or more separate from the vehicle while the vehicle is being washed. (Take care to ensure that the key is not stolen.)
- If there is another electronic key in the detection area, it may take slightly longer to unlock the doors after the door handle is gripped.

When the vehicle is not driven for extended periods

- To prevent theft of the vehicle, do not leave the electronic key within 2 m (6 ft.) of the vehicle.
- The smart entry & start system can be deactivated in advance. (→P. 536)

■ **Alarm (vehicles with an alarm)**

Using the smart entry & start system to lock the doors will set the alarm system. (→P. 119)

■ **To operate the system properly**

Make sure to carry the electronic key when operating the system. Do not get the electronic key too close to the vehicle when operating the system from the outside of the vehicle.

Depending on the position and holding condition of the electronic key, the key may not be detected correctly and the system may not operate properly. (The alarm may go off accidentally, or the door lock prevention function may not operate.)

■ **If the smart entry & start system does not operate properly**

- Locking and unlocking the doors: Use the mechanical key. (→P. 492)
- Starting the engine: →P. 493

■ **Electronic key battery depletion**

- The standard battery life is 1 to 2 years.
- If the battery becomes low, an alarm will sound in the cabin each time the engine starts or stops. (→P. 451)
- As the electronic key always receives radio waves, the battery will become depleted even if the electronic key is not used. The following symptoms indicate that the electronic key battery may be depleted. Replace the battery when necessary. (→P. 402)
  - The smart entry & start system or the wireless remote control does not operate.
  - The detection area becomes smaller.
  - The LED indicator on the key surface does not turn on.
- To avoid serious deterioration, do not leave the electronic key within 1 m (3 ft.) of the following electrical appliances that produce a magnetic field:
  - TVs
  - Personal computers
  - Cellular phones, cordless phones and battery chargers
  - Recharging cellular phones or cordless phones
  - Glass top ranges
  - Table lamps

■ **When the electronic key battery is fully depleted**

→P. 402

■ **If the smart entry & start system has been deactivated in a customized setting**

- Locking and unlocking the doors: Use the wireless remote control or mechanical key. (→P. 59, 492)
- Starting the engine and changing “ENGINE START STOP” switch modes: →P. 493
- Stopping the engine: →P. 179

■ **Customization that can be configured at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional**

Settings (e. g. smart entry & start system) can be changed.
(Customizable features: →P. 536)

Certification for the smart entry & start system

TOYOTA

TOYOTA MOTOR CORPORATION

1, TOYOTA-CHO, TOYOTA, AICHI, 471-8571(Head Office)
or 471-8572(Research & Development Group) JAPAN
TEL:+81-565-28-2121

R&TTE Declaration of Conformity

We,

Manufacturer's Name: TOYOTA MOTOR CORPORATION
Manufacturer's Address: 1, Toyota -cho, Toyota, Aichi, 471-8572, Japan

hereby declare under our sole responsibility that the product:

Product Name: LF Oscillator
Product Model: TMLF10-1
to which this declaration relates is in conformity with the essential requirements and other relevant requirements of the R&TTE Directive (1999/5/EC). The product is compliant with the following standards and/or other normative documents:

-Health & safety requirements:	EN60950-1
-EMC requirements	EN 301 489-01 & EN 301 489-03
-Effective uses of radio spectrum:	EN 300 330-2

Supplementary information:

* CE mark	CE
* Member states intended for use	EU and EFTA

Date: June 10, 2010

Signature: Tetsuya Matsuo
Tetsuya Matsuo

TOYOTA

TOYOTA MOTOR CORPORATION

1, TOYOTA-CHO, TOYOTA, AICHI, 471-8571, JAPAN TEL.:+81-565-28-2121

R&TTE Declaration of Conformity

We,

Manufacturer's Name: TOYOTA MOTOR CORPORATION
Manufacturer's Address: 1, Toyota -cho, Toyota, Aichi, 471-8572, Japan

hereby declare under our sole responsibility that the product:

Product Name: LF Oscillator
Product Model: TMLF10-52
to which this declaration relates is in conformity with the essential requirements and other relevant requirements of the R&TTE Directive (1999/5/EC). The product is compliant with the following standards and/or other normative documents:

-Health & safety requirements: EN 60950-1
-EMC requirements EN 301 489-01 & EN 301 489-03
-Effective uses of radio spectrum: EN 300 330-2

Supplementary information:

* CE mark	CE
* Member states intended for use	EU and EFTA

Date: May 24, 2013

Signature: Tetsuya Matsuo

Tetsuya Matsuo

TOYOTA

TOYOTA MOTOR CORPORATION

1, TOYOTA-CHO, TOYOTA, AICHI, 471-8571, JAPAN TEL:+81-565-28-2121

R&TTE Declaration of Conformity

We,

Manufacturer's Name: TOYOTA MOTOR CORPORATION
Manufacturer's Address: 1, Toyota -cho, Toyota, Aichi, 471-8572, Japan

hereby declare under our sole responsibility that the product:

Product Name: LF Oscillator
Product Model: TMLF10-53
to which this declaration relates is in conformity with the essential requirements and other relevant requirements of the R&TTE Directive (1999/5/EC). The product is compliant with the following standards and/or other normative documents:

-Health & safety requirements:	EN 60950-1
-EMC requirements	EN 301 489-01 & EN 301 489-03
-Effective uses of radio spectrum:	EN 300 330-2

Supplementary information:

* CE mark	CE
* Member states intended for use	EU and EFTA

Date: May 24, 2013

Signature: Tetsuya Matsuo

Tetsuya Matsuo

Hereby, Toyota Motor Corporation, declares that this TMLF10-1, TMLF10-52, TMLF10-53 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Toyota Motor Corporation vakuuttaa täten että TMLF10-1, TMLF10-52, TMLF10-53 tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Hierbij verklaart Toyota Motor Corporation dat het toestel TMLF10-1, TMLF10-52, TMLF10-53 in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Par la présente Toyota Motor Corporation déclare que l'appareil TMLF10-1, TMLF10-52, TMLF10-53 est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Härmed intygar Toyota Motor Corporation att denna TMLF10-1, TMLF10-52, TMLF10-53 står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Undertegnede Toyota Motor Corporation erklærer herved, at følgende udstyr TMLF10-1, TMLF10-52, TMLF10-53 overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Toyota Motor Corporation, dass sich das Gerät TMLF10-1, TMLF10-52, TMLF10-53 in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Toyota Motor Corporation ΔΗΛΩΝΕΙ ΟΤΙ TMLF10-1, TMLF10-52, TMLF10-53 ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Con la presente Toyota Motor Corporation dichiara che questo TMLF10-1, TMLF10-52, TMLF10-53 è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Por medio de la presente Toyota Motor Corporation declara que el TMLF10-1, TMLF10-52, TMLF10-53 cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Toyota Motor Corporation declara que este TMLF10-1, TMLF10-52, TMLF10-53 está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Hawnhekk, Toyota Motor Corporation, jiddikjara li dan TMLF10-1, TMLF10-52, TMLF10-53 jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Käesolevaga kinnitab Toyota Motor Corporation seadme TMLF10-1, TMLF10-52, TMLF10-53 vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Alulírott, Toyota Motor Corporation nyilatkozom, hogy a TMLF10-1, TMLF10-52, TMLF10-53 megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Toyota Motor Corporation týmto vyhlasuje, že TMLF10-1, TMLF10-52, TMLF10-53 spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Toyota Motor Corporation tímto prohlašuje, že tento TMLF10-1, TMLF10-52, TMLF10-53 je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Toyota Motor Corporation izjavlja, da je ta TMLF10-1, TMLF10-52, TMLF10-53 v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Šiuo Toyota Motor Corporation deklaruoja, kad šis TMLF10-1, TMLF10-52, TMLF10-53 atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Ar šo Toyota Motor Corporation deklarē, ka TMLF10-1, TMLF10-52, TMLF10-53 atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Niniejszym Toyota Motor Corporation oświadcza, że TMLF10-1, TMLF10-52, TMLF10-53 jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Hér með lýsir Toyota Motor Corporation yfir því að TMLF10-1, TMLF10-52, TMLF10-53 er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

Toyota Motor Corporation erklærer herved at utstyret TMLF10-1, TMLF10-52, TMLF10-53 er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

С настоящето, Toyota Motor Corporation, декларира, че TMLF10-1, TMLF10-52, TMLF10-53 е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.

Prin prezenta, Toyota Motor Corporation, declară că aparatul TMLF10-1, TMLF10-52, TMLF10-53 este in conformitate cu cerințele esențiale și cu alte prevederi pertinente ale Directivei 1999/5/CE.

Ovim, Toyota Motor Corporation, izjavljuje da ovaj TMLF10-1, TMLF10-52, TMLF10-53 je usklađen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC.

Nepermjet kesaj, Toyota Motor Corporation, deklaroj qe ky TMLF10-1, TMLF10-52, TMLF10-53 eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.

Ovim Toyota Motor Corporation, izjavljuje da je TMLF10-1, TMLF10-52, TMLF10-53 u sklau s bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC i Pravilnika o RiTT opremi (NN 25/2012).

Ovim, Toyota Motor Corporation, deklariše da je TMLF10-1, TMLF10-52, TMLF10-53 u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 1999/5/EC.

Hereby, Tokai Rika Co., Ltd., declares that this B74EA is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Tokai Rika Co., Ltd. vakuuttaa täten että B74EA tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Hierbij verklaart Tokai Rika Co., Ltd. dat het toestel B74EA in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Par la présente Tokai Rika Co., Ltd. déclare que l'appareil B74EA est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Härmed intygar Tokai Rika Co., Ltd. att denna B74EA står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Undertegnede Tokai Rika Co., Ltd. erklærer herved, at følgende udstyr B74EA overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Tokai Rika Co., Ltd., dass sich das Gerät B74EA in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Tokai Rika Co., Ltd. ΔΗΛΩΝΕΙ ΟΤΙ B74EA ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Con la presente Tokai Rika Co., Ltd. dichiara che questo B74EA è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Por medio de la presente Tokai Rika Co., Ltd. declara que el B74EA cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Tokai Rika Co., Ltd. declara que este B74EA está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Hawnhekk, Tokai Rika Co., Ltd., jiddikjara li dan B74EA jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Käesolevaga kinnitab Tokai Rika Co., Ltd. seadme B74EA vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Alulírott, Tokai Rika Co., Ltd. nyilatkozom, hogy a B74EA megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Tokai Rika Co., Ltd. týmto vyhlasuje, že B74EA spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Tokai Rika Co., Ltd. tímto prohlašuje, že tento B74EA je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Tokai Rika Co., Ltd. izjavlja, da je ta B74EA v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Šiuo Tokai Rika Co., Ltd. deklaruoja, kad šis B74EA atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Ar šo Tokai Rika Co., Ltd. deklarē, ka B74EA atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Niniejszym Tokai Rika Co., Ltd. oświadcza, że B74EA jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Hér með lýsir Tokai Rika Co., Ltd. yfir því að B74EA er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

Tokai Rika Co., Ltd. erklærer herved at utstyret B74EA er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

С настоящето, Tokai Rika Co., Ltd., декларира, че B74EA е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.

Prin prezenta, Tokai Rika Co., Ltd., declară că aparatul B74EA este in conformitate cu cerințele esențiale și cu alte prevederi pertinente ale Directivei 1999/5/CE.

Ovim, Tokai Rika Co., Ltd., izjavljuje da ovaj B74EA je usklađen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC.

Nepermjet kesaj, Tokai Rika Co., Ltd., deklaroj qe ky B74EA eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.

Ovim Tokai Rika Co., Ltd., izjavljuje da je B74EA u sklau s bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC i Pravilnika o RiTT opremi (NN 25/2012).

Ovim, Tokai Rika Co., Ltd., deklariše da je B74EA u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 1999/5/EC.

The DECLARATION of CONFORMITY (DoC) is available at the following address:
http://www.tokai-rika.co.jp/pc/

CE

Hereby, Tokai Rika Co., Ltd., declares that this B81UA is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Tokai Rika Co., Ltd. vakuuttaa täten että B81UA tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Hierbij verklaart Tokai Rika Co., Ltd. dat het toestel B81UA in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Par la présente Tokai Rika Co., Ltd. déclare que l'appareil B81UA est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Härmed intygar Tokai Rika Co., Ltd. att denna B81UA står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Undertegnede Tokai Rika Co., Ltd. erklærer herved, at følgende udstyr B81UA overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Tokai Rika Co., Ltd., dass sich das Gerät B81UA in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Tokai Rika Co., Ltd. ΔΗΛΩΝΕΙ ΟΤΙ B81UA ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Con la presente Tokai Rika Co., Ltd. dichiara che questo B81UA è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Por medio de la presente Tokai Rika Co., Ltd. declara que el B81UA cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Tokai Rika Co., Ltd. declara que este B81UA está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Hawnhekk, Tokai Rika Co., Ltd., jiddikjara li dan B81UA jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Käesolevaga kinnitab Tokai Rika Co., Ltd. seadme B81UA vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Alulírott, Tokai Rika Co., Ltd. nyilatkozom, hogy a B81UA megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Tokai Rika Co., Ltd. týmto vyhlasuje, že B81UA spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Tokai Rika Co., Ltd. tímto prohlašuje, že tento B81UA je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Tokai Rika Co., Ltd. izjavlja, da je ta B81UA v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Šiuo Tokai Rika Co., Ltd. deklaruoja, kad šis B81UA atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Ar šo Tokai Rika Co., Ltd. deklarē, ka B81UA atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Niniejszym Tokai Rika Co., Ltd. oświadcza, że B81UA jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Hér með lýsir Tokai Rika Co., Ltd. yfir því að B81UA er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

Tokai Rika Co., Ltd. erklærer herved at utstyret B81UA er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

С настоящето, Tokai Rika Co., Ltd., декларира, че B81UA е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.

Prin prezenta, Tokai Rika Co., Ltd., declară că aparatul B81UA este in conformitate cu cerințele esențiale și cu alte prevederi pertinente ale Directivei 1999/5/CE.

Ovim, Tokai Rika Co., Ltd., izjavljuje da ovaj B81UA je usklađen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC.

Nepermjet kesaj, Tokai Rika Co., Ltd., deklaroj qe ky B81UA eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.

Ovim Tokai Rika Co., Ltd., izjavljuje da je B81UA u sklau s bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC i Pravilnika o RiTT opremi (NN 25/2012).

Ovim, Tokai Rika Co., Ltd., deklariše da je B81UA u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 1999/5/EC.

The DECLARATION of CONFORMITY (DoC) is available at the following address:
http://www.tokai-rika.co.jp/pc/

CE

CAUTION

■ **Caution regarding interference with electronic devices**

- People with implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should maintain a reasonable distance between themselves and the smart entry & start system antennas. (→P. 36)
  The radio waves may affect the operation of such devices. If necessary, the entry function can be disabled. Ask any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for details, such as the frequency of radio waves and timing of the emitted radio waves. Then, consult your doctor to see if you should disable the entry function.
- Users of any electrical medical device other than implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should consult the manufacturer of the device for information about its operation under the influence of radio waves.
  Radio waves could have unexpected effects on the operation of such medical devices.

Ask any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for details on disabling the entry function.

Wireless remote control

The wireless remote control can be used to lock and unlock the vehicle.

Vehicles without a smart entry & start system

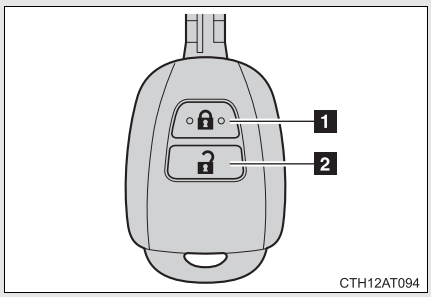

1 Locks all the doors

2 Unlocks all the doors

Vehicles with a smart entry & start system

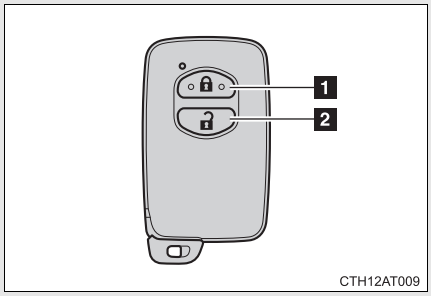

1 Locks all the doors

2 Unlocks all the doors

■ **Operation signals**

The emergency flashers flash to indicate that the doors have been locked/unlocked. (Locked: once; Unlocked: twice)

■ **Door lock buzzer (vehicles with a smart entry & start system)**

If an attempt to lock the doors is made when a door is not fully closed, a buzzer sounds continuously. Fully close the door to stop the buzzer, and lock the vehicle once more.

■ **Security feature**

If a door is not opened within approximately 30 seconds after the vehicle is unlocked, the security feature automatically locks the vehicle again.

■ **Alarm (vehicles with an alarm)**

Using the wireless remote control to lock the doors will set the alarm system. (→P. 119)

■ **Conditions affecting operation**

Vehicles without a smart entry & start system
The wireless remote control function may not operate normally in the following situations:

- When the wireless key battery is depleted
- Near a TV tower, electric power plant, gas station, radio station, large display, airport or other facility that generates strong radio waves or electrical noise
- When carrying a portable radio, cellular phone or other wireless communication devices
- When the wireless key is in contact with, or is covered by a metallic object
- When other wireless key (that emit radio waves) is being used nearby
- If window tint with a metallic content or metallic objects are attached to the rear window

Vehicles with a smart entry & start system
→P. 41

■ **If the wireless remote control does not operate properly (vehicles with a smart entry & start system)**

Locking and unlocking the doors: Use the mechanical key. (→P. 492)

■ **Key battery depletion**

Vehicles without a smart entry & start system
If the wireless remote control function does not operate, the battery may be depleted. Replace the battery when necessary. (→P. 402)

Vehicles with a smart entry & start system
→P. 44

■ **When the key battery is fully depleted**

→P. 402

■ **Confirmation of the registered key number (vehicles with a smart entry and start system)**

The number of keys already registered to the vehicle can be confirmed. Ask any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for details.

■ **Customization that can be configured at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional**

Settings (e.g. wireless remote control system) can be changed.
(Customizable features →P. 536)

Certification for wireless remote control

Hereby, Tokai Rika Co., Ltd., declares that this B41RA is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Tokai Rika Co., Ltd. vakuuttaa täten että B41RA tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Hierbij verklaart Tokai Rika Co., Ltd. dat het toestel B41RA in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Par la présente Tokai Rika Co., Ltd. déclare que l'appareil B41RA est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Härmed intygar Tokai Rika Co., Ltd. att denna B41RA står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Undertegnede Tokai Rika Co., Ltd. erklærer herved, at følgende udstyr B41RA overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Tokai Rika Co., Ltd., dass sich das Gerät B41RA in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Tokai Rika Co., Ltd. ΔΗΛΩΝΕΙ ΟΤΙ B41RA ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Con la presente Tokai Rika Co., Ltd. dichiara che questo B41RA è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Por medio de la presente Tokai Rika Co., Ltd. declara que el B41RA cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Tokai Rika Co., Ltd. declara que este B41RA está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Hawnhekk, Tokai Rika Co., Ltd., jiddikjara li dan B41RA jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Käesolevaga kinnitab Tokai Rika Co., Ltd. seadme B41RA vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Alulírott, Tokai Rika Co., Ltd. nyilatkozom, hogy a B41RA megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Tokai Rika Co., Ltd. týmto vyhlasuje, že B41RA spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Tokai Rika Co., Ltd. tímto prohlašuje, že tento B41RA je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Tokai Rika Co., Ltd. izjavlja, da je ta B41RA v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Šiuo Tokai Rika Co., Ltd. deklaruoja, kad šis B41RA atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Ar šo Tokai Rika Co., Ltd. deklarē, ka B41RA atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Niniejszym Tokai Rika Co., Ltd. oświadcza, że B41RA jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Hér með lýsir Tokai Rika Co., Ltd. yfir því að B41RA er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

Tokai Rika Co., Ltd. erklærer herved at utstyret B41RA er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

С настоящето, Tokai Rika Co., Ltd., декларира, че B41RA е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.

Prin prezenta, Tokai Rika Co., Ltd., declară că aparatul B41RA este in conformitate cu cerințele esențiale și cu alte prevederi pertinente ale Directivei 1999/5/CE.

Ovim, Tokai Rika Co., Ltd., izjavljuje da ovaj B41RA je usklađen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC.

Nepermjet kesaj, Tokai Rika Co., Ltd., deklaroj qe ky B41RA eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.

Ovim Tokai Rika Co., Ltd., izjavljuje da je B41RA u sklau s bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC i Pravilnika o RiTT opremi (NN 25/2012).

Ovim, Tokai Rika Co., Ltd., deklariše da je B41RA u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 1999/5/EC.

The DECLARATION of CONFORMITY (DoC) is available at the following address:
http://www.tokai-rika.co.jp/pc/

CE

Hereby, Tokai Rika Co., Ltd., declares that this B51TA is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Tokai Rika Co., Ltd. vakuuttaa täten että B51TA tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Hierbij verklaart Tokai Rika Co., Ltd. dat het toestel B51TA in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Par la présente Tokai Rika Co., Ltd. déclare que l'appareil B51TA est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Härmed intygar Tokai Rika Co., Ltd. att denna B51TA står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Undertegnede Tokai Rika Co., Ltd. erklærer herved, at følgende udstyr B51TA overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Tokai Rika Co., Ltd., dass sich das Gerät B51TA in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Tokai Rika Co., Ltd. ΔΗΛΩΝΕΙ ΟΤΙ B51TA ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Con la presente Tokai Rika Co., Ltd. dichiara che questo B51TA è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Por medio de la presente Tokai Rika Co., Ltd. declara que el B51TA cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Tokai Rika Co., Ltd. declara que este B51TA está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Hawnhekk, Tokai Rika Co., Ltd., jiddikjara li dan B51TA jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Käesolevaga kinnitab Tokai Rika Co., Ltd. seadme B51TA vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Alulírott, Tokai Rika Co., Ltd. nyilatkozom, hogy a B51TA megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Tokai Rika Co., Ltd. týmto vyhlasuje, že B51TA spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Tokai Rika Co., Ltd. tímto prohlašuje, že tento B51TA je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Tokai Rika Co., Ltd. izjavlja, da je ta B51TA v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Šiuo Tokai Rika Co., Ltd. deklaruoja, kad šis B51TA atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Ar šo Tokai Rika Co., Ltd. deklarē, ka B51TA atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Niniejszym Tokai Rika Co., Ltd. oświadcza, że B51TA jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Hér með lýsir Tokai Rika Co., Ltd. yfir því að B51TA er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

Tokai Rika Co., Ltd. erklærer herved at utstyret B51TA er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

С настоящето, Tokai Rika Co., Ltd., декларира, че B51TA е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.

Prin prezenta, Tokai Rika Co., Ltd., declară că aparatul B51TA este in conformitate cu cerințele esențiale şi cu alte prevederi pertinente ale Directivei 1999/5/CE.

Ovim, Tokai Rika Co., Ltd., izjavljuje da ovaj B51TA je usklađen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC.

Nepermjet kesaj, Tokai Rika Co., Ltd., deklaroj qe ky B51TA eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.

Ovim Tokai Rika Co., Ltd., izjavljuje da je B51TA u sklau s bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC i Pravilnika o RiTT opremi (NN 25/2012).

Ovim, Tokai Rika Co., Ltd., deklariše da je B51TA u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 1999/5/EC.

The DECLARATION of CONFORMITY (DoC) is available at the following address:
http://www.tokai-rika.co.jp/pc/

CE

The vehicle can be locked and unlocked using the entry function, wireless remote control, key or door lock switch.

■ **Entry function (vehicles with a smart entry & start system)**
→P. 34

■ **Wireless remote control**
→P. 59

■ **Keys**

Turning the key operates the doors as follows:

Vehicles without a smart entry & start system

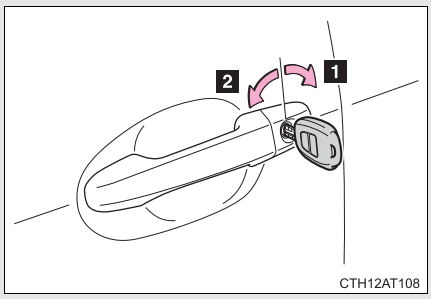

1 Unlocks all the doors
2 Locks all the doors

Vehicles with a smart entry & start system

The doors can also be locked and unlocked with the mechanical key. (→P. 492)

■ **Door lock switch**

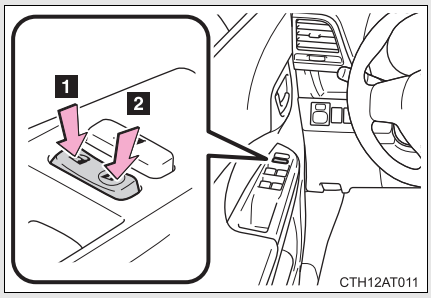

1 Unlocks all the doors
2 Locks all the doors

■ **Inside lock buttons**

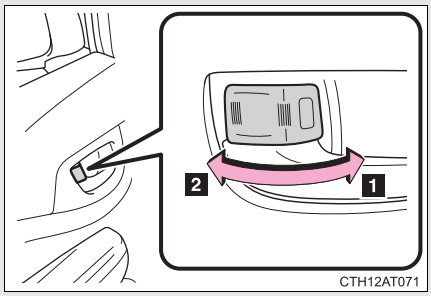

1 Locks the door

2 Unlocks the door

The front doors can be opened by pulling the inside handle even if the lock button is in the lock position.

Locking the front doors from the outside without a key

STEP 1 Move the inside lock button to the lock position.

STEP 2 Close the door while pulling the door handle.

Vehicles without a smart entry & start system

The door cannot be locked if the key is in the engine switch.

Vehicles with a smart entry & start system

The door cannot be locked if the “ENGINE START STOP” switch is in ACCESSORY or IGNITION ON mode, or the electronic key is left inside the vehicle.

The key may not be detected correctly and the door may be locked.

Rear door child-protector lock

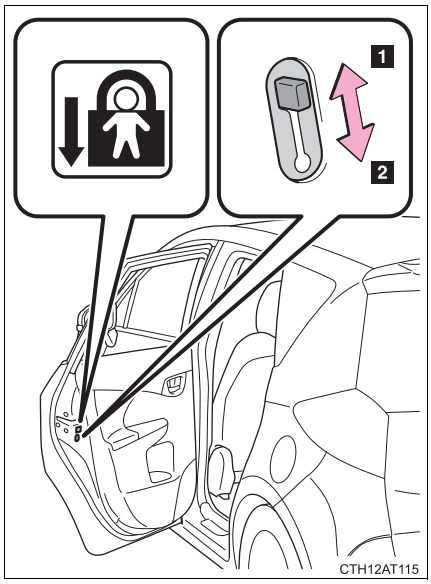

The door cannot be opened from inside the vehicle when the lock is set.

1 Unlock

2 Lock

These locks can be set to prevent children from opening the rear doors. Push down on each rear door switch to lock both rear doors.

Automatic door locking and unlocking systems

The following functions can be set or canceled:

Function	Operation
Shift position linked door locking function*	Shifting the shift lever out of P locks all the doors.
Shift position linked door unlocking function*	Shifting the shift lever to P unlocks all the doors.
Speed linked door locking function	All the doors are locked when the vehicle speed is approximately 20 km/h (12 mph) or higher.
Driver's door linked door unlocking function (vehicles without a smart entry & start system)	All the doors are unlocked when the driver's door is opened within 10 seconds after turning the engine switch to “ACC” or “LOCK”.
Driver's door linked door unlocking function (vehicles with a smart entry & start system)	All the doors are unlocked when the driver's door is opened within 10 seconds after turning the “ENGINE START STOP” switch off.

*: Vehicles with a Multidrive only

■ Setting and canceling the functions

To switch between setting and canceling, follow the procedure below.

STEP 1 **Vehicles without a smart entry & start system**

Close all the doors and turn the engine switch to the “ON” position. (Perform step 2 within 20 seconds.)

Vehicles with a smart entry & start system

Close all the doors and turn the “ENGINE START STOP” switch to IGNITION ON mode. (Perform step 2 within 20 seconds.)

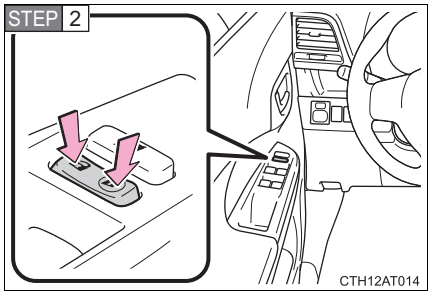

Shift the shift lever to P (vehicles with a Multidrive only) or N, and press and hold the door lock switch (or) for approximately 5 seconds and then release.

The shift lever and switch positions corresponding to the desired function to be set are shown in the following table.

Use the same procedure to cancel the function.

Function	Shift lever position	Door lock switch position
Shift position linked door locking function*	P	
Shift position linked door unlocking function*		
Speed linked door locking function	N	
Driver's door linked door unlocking function		

*: Vehicles with a Multidrive only

When the setting or canceling operation is complete, all doors are locked and then unlocked.

■ **Impact detection door lock release system**

In the event that the vehicle is subject to a strong impact, all the doors are unlocked. Depending on the force of the impact or the type of accident, however, the system may not operate.

■ **Using the mechanical key (vehicles with a smart entry & start system)**

The doors can also be locked and unlocked with the mechanical key. (→P. 492)

■ **If a wrong key is used (left-hand drive vehicles with smart entry & start system and right-hand drive vehicles)**

The key cylinder rotates freely to isolate inside mechanism.

■ **If the smart entry & start system has been deactivated in a customized setting (vehicles with a smart entry & start system)**

Use the wireless remote control or mechanical key. (→P. 59, 492)

■ **Customization that can be configured at any authorized Toyota dealer or repair, or another duly qualified and equipped professional**

Settings (e.g. speed linked door locking function) can be changed. (Customizable features: →P. 536)

CAUTION

■ **To prevent an accident**

Observe the following precautions while driving the vehicle.
Failing to do so may result in a door opening and an occupant falling out, resulting in death or serious injury.

- Always use a seat belt.
- Ensure that all the doors are properly closed.
- Do not pull the inside handle of the doors while driving.
  The doors may be opened and the passengers are thrown out of the vehicle and it may result in serious injury or death.

  Be especially careful for the front doors, as the doors may be opened even if the inside lock buttons are in locked position.
- Set the rear door child-protector locks when children are seated in the rear seats.

Back door

The back door can be locked/unlocked and opened by the following procedures.

■ Locking and unlocking the back door

Keys

→P. 68

Wireless remote control

→P. 59

Door lock switch

→P. 68

Entry function (vehicles with a smart entry & start system)

→P. 33

■ Opening the back door from outside the vehicle

Back door opener

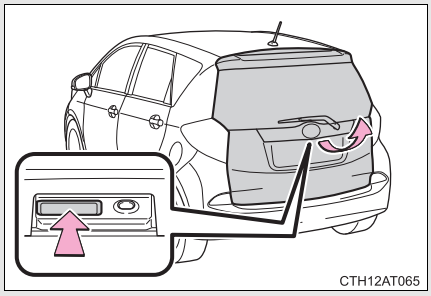

Raise the back door while pushing up the back door opener switch.

The back door cannot be closed immediately after the back door opener switch is pushed.

■ When closing the back door



Lower the back door using the back door handle, and make sure to push the back door down from the outside to close it.

■ If the back door opener is inoperative

The back door can be operated from the inside.



Insert a flathead screwdriver under the edge of the trim and then carefully pull the trim upward to remove it.

There are 11 clips attaching the trim.

- To protect the trim, wrap the flathead screwdriver in tape and insert it into the trim cutout as shown in the illustration. Move the flathead screwdriver in the direction indicated by the arrow.
- Carefully remove the clips one at a time.



Move the lever.

If the smart entry & start system has been deactivated in a customized setting (vehicles with a smart entry & start system)

Use the wireless remote control or mechanical key. (→P. 59, 492)

CAUTION

Caution while driving

- Keep the back door closed while driving.
  If the back door is left open, it may hit near-by objects while driving or luggage may be unexpectedly thrown out, causing an accident.
  In addition, exhaust gases may enter the vehicle, causing death or a serious health hazard. Make sure to close the back door before driving.
- Before driving the vehicle, make sure that the back door is fully closed. If the back door is not fully closed, it may open unexpectedly while driving, causing an accident.
- Never let anyone sit in the luggage compartment. In the event of sudden braking or a collision, they are susceptible to death or serious injury.

When children are in the vehicle

Observe the following precautions.
Failure to do so may result in death or serious injury.

- Do not allow children to play in the luggage compartment.
  If a child is accidentally locked in the luggage compartment, they could have heat exhaustion or other injures.
- Do not allow a child to open or close the back door.
  Doing so may cause the back door to operate unexpectedly, or cause the child's hands, head, or neck to be caught by the closing back door.

CAUTION

■ **Operating the back door**

Observe the following precautions.
Failure to do so may cause parts of the body to be caught, resulting in serious injury.

- Remove any heavy loads, such as snow and ice, from the back door before opening it. Failure to do so may cause the back door to suddenly shut again after it is opened.
- When opening or closing the back door, thoroughly check to make sure the surrounding area is safe.
- If anyone is in the vicinity, make sure they are safe and let them know that the back door is about to open or close.
- Use caution when opening or closing the back door in windy weather as it may move abruptly in strong wind.


CTH12AT019

- The back door may suddenly shut if it is not opened fully. It is more difficult to open or close the back door on an incline than on a level surface, so beware of the back door unexpectedly opening or closing by itself. Make sure that the back door is fully open and secure before using the luggage compartment.


CTH12AT020

- When closing the back door, take extra care to prevent your fingers etc. from being caught.
- When closing the back door, make sure to press it lightly on its outer surface. If the back door handle is used to fully close the back door, it may result in hands or arms being caught.

CAUTION

- Do not pull on the back door damper stay to close the back door, and do not hang on the back door damper stay.
  Doing so may cause hands to be caught or the back door damper stay to break, causing an accident.
- Do not attach any accessories other than genuine Toyota parts to the back door. Such additional weight on the back door may cause the back door to suddenly shut again after it is opened.

NOTICE

■ **Back door damper stays**

The back door is equipped with damper stays that hold the back door in place.

Observe the following precautions.
Failure to do so may cause damage to the back door damper stay, resulting in malfunction.



- Do not attach any foreign objects, such as stickers, plastic sheets, or adhesives to the damper stay rod.
- Do not touch the damper stay rod with gloves or other fabric items.
- Do not attach any accessories other than genuine Toyota parts to the back door.
- Do not place your hand on the damper stay or apply lateral forces to it.

Front seats

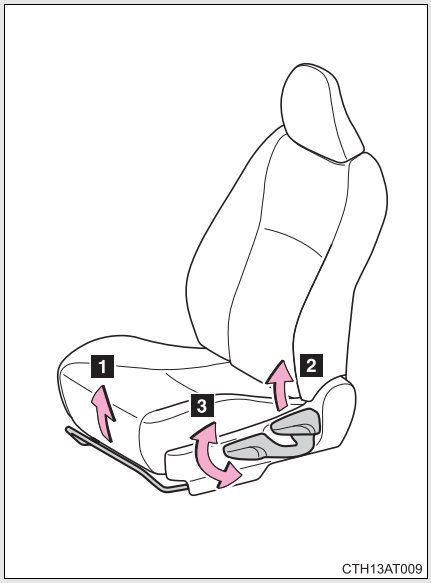

1 Seat position adjustment lever

2 Seatback angle adjustment lever

3 Vertical height adjustment lever (driver's side only)

CAUTION

■ Seat adjustment

- Be careful that the seat does not hit passengers or luggage.
- To reduce the risk of sliding under the lap belt during a collision, do not recline the seat more than necessary.
  If the seat is too reclined, the lap belt may slide past the hips and apply restraint forces directly to the abdomen, or your neck may contact the shoulder belt, increasing the risk of death or serious injury in the event of an accident.
  Adjustments should not be made while driving as the seat may unexpectedly move and cause the driver to lose control of the vehicle.
- After adjusting the seat, make sure that the seat is locked in position.

Rear seats

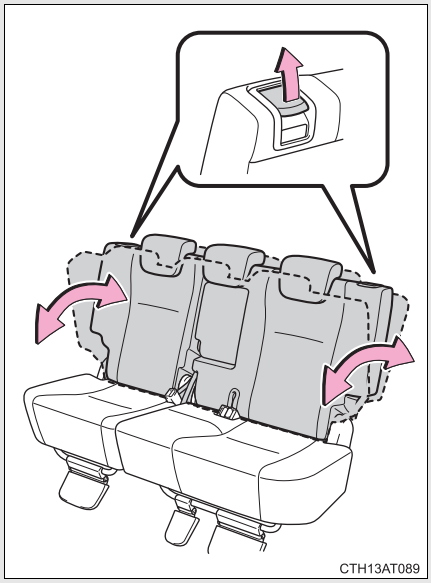

Pull up the seatback angle adjustment lever until the lock is released.

Folding down the rear seatbacks

■ Before folding down the rear seatbacks

STEP 1 Stow the seat belts.

Center

→P. 88

Outside

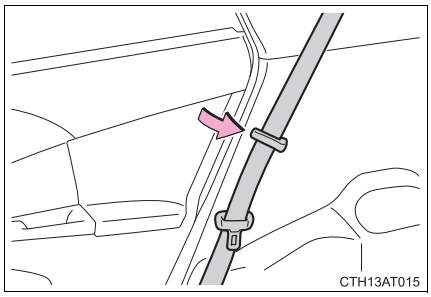

Use the seat belt hangers to prevent the belts from being tangled.

STEP 2

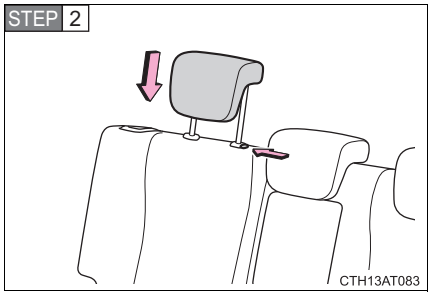

Adjust the head restraints to the downmost position.

STEP 3

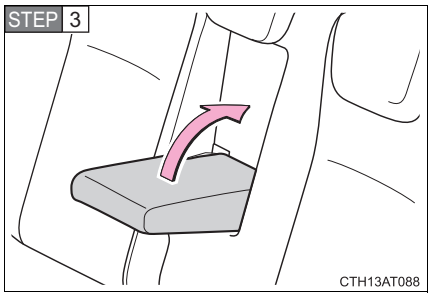

Vehicles with a rear armrest: Raise the armrest.

■ Folding down rear seatbacks

From inside

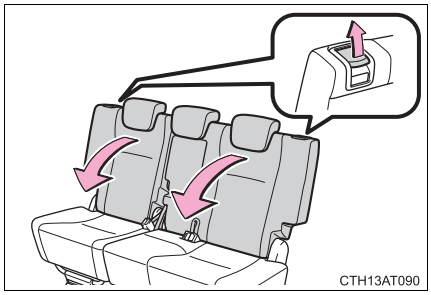

Fold the seatback down while pulling the seatback angle adjustment lever.

Pull the lever until the lock is released.

From outside

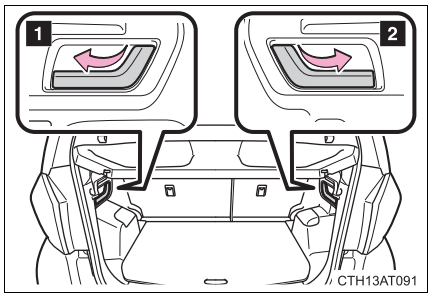

Pull the lever.

1 Folds down the left side and center seats

2 Folds down the right side seat

CAUTION

When folding the rear seatbacks down

Observe the following precautions. Failure to do so may result in death or serious injury.

- Do not fold the rear seatback when rear passengers sit on the rear seats or luggage is placed on the seat. Make sure that no passengers or luggage are on the rear seat. Be especially careful when operating the rear seat from the luggage compartment.
- Do not fold the seatbacks down while driving.
- Stop the vehicle on level ground, set the parking brake and shift the shift lever to P (vehicles with a Multidrive), E, M or R (vehicles with a multi-mode manual transmission) or N (vehicles with a manual transmission).
- Do not allow anyone to sit on a folded seatback or in the luggage compartment while driving.
- Do not allow children to enter the luggage compartment.
- Do not allow anyone sit on the rear center seat if the rear right seat is folded down, as the seat belt buckle for the rear center seat belt is then concealed under the folded seat and cannot be used.
- Be careful not to catch your hand when folding the rear seatbacks.

Seat adjustment

- To reduce the risk of sliding under the lap belt during a collision, do not recline the seat more than necessary.
  If the seat is too reclined, the lap belt may slide past the hips and apply restraint forces directly to the abdomen, or your neck may contact the shoulder belt, increasing the risk of death or serious injury in the event of an accident.
  Adjustments should not be made while driving as the seat may unexpectedly move and cause the driver to lose control of the vehicle.
- Be careful not to catch your hand when adjusting the rear seats.

CAUTION

After returning the rear seatback to the upright position

Observe the following precautions. Failure to do so may result in death or serious injury.

- Make sure the seatback is securely locked by pushing it forward and rearward on the top.
- Check that the seat belts are not twisted or caught in the seatback.

NOTICE

Stowing the seat belts

The seat belts must be stowed before you fold down the rear seatbacks.

Head restraints

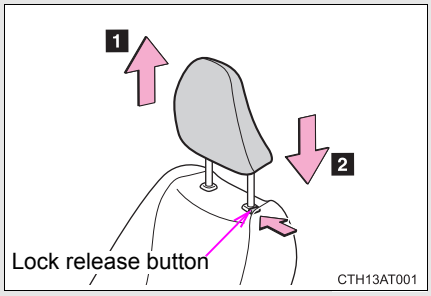

1 Up

Pull the head restraints up.

2 Down

Push the head restraint down while pushing the lock release button.

Removing the head restraints



Pull the head restraint up while pressing the lock release button.

Adjusting the height of the head restraints



Make sure that the head restraints are adjusted so that the center of the head restraint is closest to the top of your ears.

Adjusting the rear seat head restraints

Always raise the head restraint one level from the stowed position when using.

CAUTION

Head restraint precautions

Observe the following precautions regarding the head restraints. Failure to do so may result in death or serious injury.

- Use the head restraints designed for each respective seat.
- Adjust the head restraints to the correct position at all times.
- After adjusting the head restraints, push down on them and make sure they are locked in position.
- Do not drive with the head restraints removed.

Seat belts

Make sure that all occupants are wearing their seat belts before driving the vehicle.

■ Correct use of the seat belts

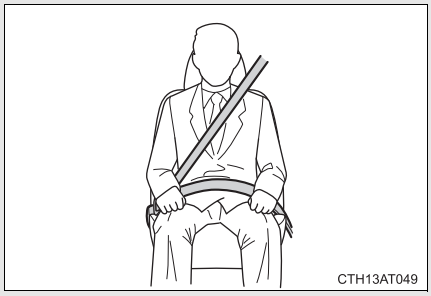

- Extend the shoulder belt so that it comes fully over the shoulder, but does not come into contact with the neck or slide off the shoulder.
- Position the lap belt as low as possible over the hips.
- Adjust the position of the seatback. Sit up straight and well back in the seat.
- Do not twist the seat belt.

■ Fastening and releasing the seat belt

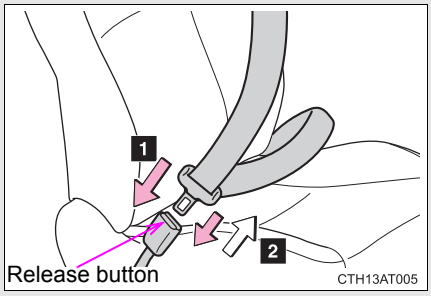

1. To fasten the seat belt, push the plate into the buckle until a click sound is heard.
2. To release the seat belt, press the release button.

Rear center seat belt

The rear center seat belt is a 3-point type restraint with 2 buckles. Both seat belt buckles must be correctly located and securely latched for proper operation.

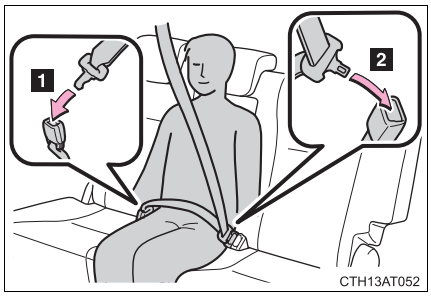

Push the tab into the buckle.

1 Tab “A”

2 Tab “B”

Push the tab into the buckle until a clicking sound is heard.

■ Release method

The rear center seat belt can be completely released only when necessary such as when folding down the rear seat.

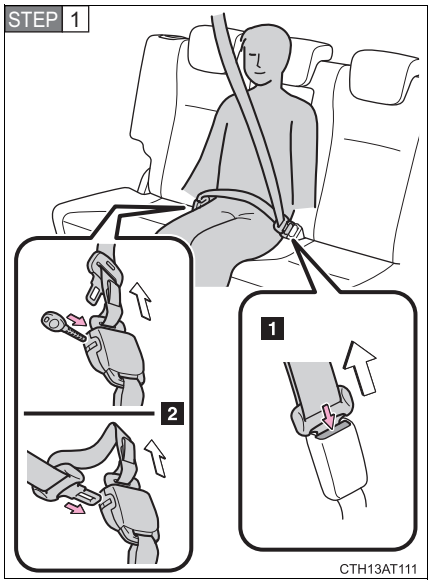

1 To release the hooked tab “B”, push the buckle release button.

2 To release the hooked tab “A”, insert the key (vehicles without a smart entry & start system) or mechanical key (vehicles with a smart entry & start system) (→P. 30) or tab “B” into the hole on the buckle.

Retract the belt slowly when releasing and stowing the seat belt.

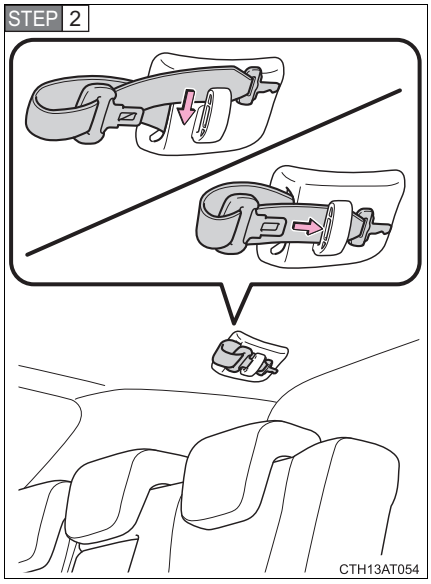

Stow the seat belt tabs using the clip located on the roof as shown.

Seat belt pretensioners (front seats)

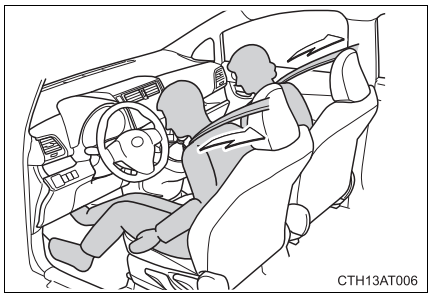

The pretensioner helps the seat belt to quickly restrain the occupant by retracting the seat belt when the vehicle is subjected to certain types of severe frontal or side collision.

The pretensioner does not activate in the event of a minor frontal impact, a minor side impact, a rear impact or a vehicle rollover.

■ **Emergency locking retractor (ELR)**

The retractor will lock the belt during a sudden stop or on impact. It may also lock if you lean forward too quickly. A slow, easy motion will allow the belt to extend so that you can move around fully.

■ **Pregnant women**

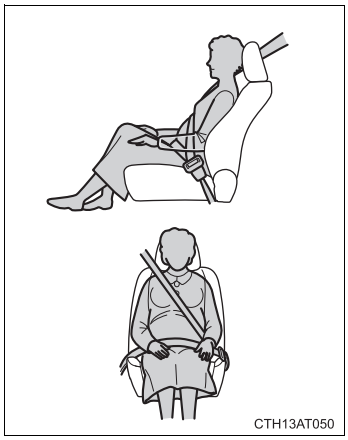

Obtain medical advice and wear the seat belt in the proper way. (→P. 87)

Women who are pregnant should position the lap belt as low as possible over the hips in the same manner as other occupants. Extend the shoulder belt completely over the shoulder and position the belt across the chest. Avoid belt contact over the rounding of the abdominal area.

If the seat belt is not worn properly, not only the pregnant woman, but also the fetus could suffer death or serious injury as a result of sudden braking or a collision.

■ **People suffering illness**

Obtain medical advice and wear the seat belt in the proper way. (→P. 87)

Child seat belt usage

The seat belts of your vehicle were principally designed for persons of adult size.

- Use a child restraint system appropriate for the child, until the child becomes large enough to properly wear the vehicle's seat belt. (→P. 138)
- When the child becomes large enough to properly wear the vehicle's seat belt, follow the instructions on P. 87 regarding seat belt usage.

Replacing the belt after the pretensioner has been activated

If the vehicle is involved in multiple collisions, the pretensioner will activate for the first collision, but will not activate for the second or subsequent collisions.

Seat belt regulations

If seat belt regulations exist in the country where you reside, please contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for seat belt replacement or installation.

CAUTION

Observe the following precautions to reduce the risk of injury in the event of sudden braking, sudden swerving or an accident.
Failure to do so may cause death or serious injury.

■ Wearing a seat belt

- Ensure that all passengers wear a seat belt.
- Always wear a seat belt properly.
- Each seat belt should be used by one person only. Do not use a seat belt for more than one person at once, including children.
- Toyota recommends that children be seated in the rear seat and always use a seat belt and/or an appropriate child restraint system.
- To achieve a proper seating position, do not recline the seat more than necessary. The seat belt is most effective when the occupants are sitting up straight and well back in the seats.
- Do not wear the shoulder belt under your arm.
- Always wear your seat belt low and snug across your hips.

■ When children are in the vehicle

Do not allow children to play with the seat belt. If the seat belt becomes twisted around a child's neck, choking or other serious injuries may result in death.
If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.

■ Seat belt pretensioners

If the pretensioner has activated, the SRS warning light will come on. In that case, the seat belt cannot be used again and must be replaced at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

■ **Seat belt damage and wear**

- Do not damage the seat belts by allowing the belt, plate, or buckle to be jammed in the door.
- Inspect the seat belt system periodically. Check for cuts, fraying, and loose parts. Do not use a damaged seat belt until it is replaced. Damaged seat belt cannot protect an occupant from death or serious injury.
- Ensure that the belt and plate are locked and the belt is not twisted.
  If the seat belt does not function correctly, immediately contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
- Replace the seat assembly, including the belts, if your vehicle has been involved in a serious accident, even if there is no obvious damage.
- Do not attempt to install, remove, modify, disassemble or dispose of the seat belts. Have any necessary repairs carried out by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional. Inappropriate handling of the pretensioner may prevent it from operating properly, resulting in death or serious injury.

■ **When using the rear center seat belt**



- Do not use the rear center seat belt with either buckle released.

  Fastening only one of the buckles may result in death or serious injury in case of sudden braking or a collision.

- Do not allow anyone sit on the rear center seat if the rear right seat is folded down, as the seat belt buckle for the rear center seat belt is then concealed under the folded seat and cannot be used.

Steering wheel

The steering wheel can be adjusted to a comfortable position.

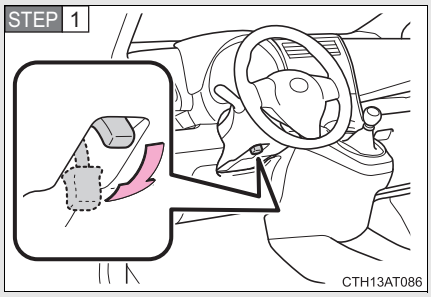

Hold the steering wheel and push the lever down.

Type A

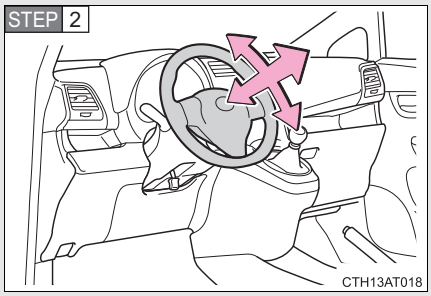

Adjust to the ideal position by moving the steering wheel horizontally and vertically.

After adjustment, pull the lever up to secure the steering wheel.

Type B

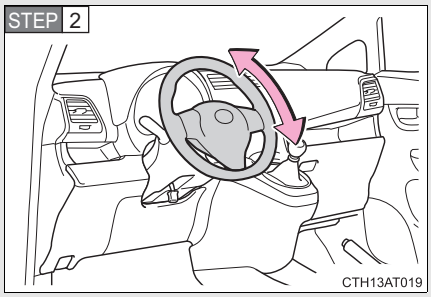

Adjust to the ideal position by moving the steering wheel.

After adjustment, pull the lever up to secure the steering wheel.

CAUTION

■ **Caution while driving**

Do not adjust the steering wheel while driving.
Doing so may cause the driver to mishandle the vehicle and cause an accident, resulting in death or serious injury.

■ **After adjusting the steering wheel**

Make sure that the steering wheel is securely locked.
Otherwise, the steering wheel may move suddenly, possibly causing an accident, and resulting in death or serious injury.

Anti-glare inside rear view mirror

Glare from the headlights of vehicles behind can be reduced by using the following functions:

Manual anti-glare inside rear view mirror

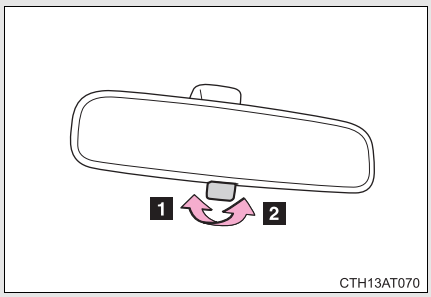

1 Normal position

2 Anti-glare position

Auto anti-glare inside rear view mirror

In automatic mode, sensors are used to detect the headlights of vehicles behind and the reflected light is automatically reduced.

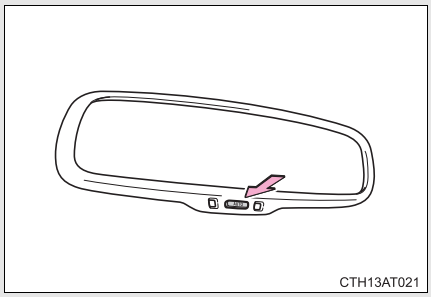

Turns automatic mode on/off

The indicator comes on when automatic mode is turned on.

Vehicles without a smart entry & start system
The mirror will revert to the automatic mode each time the engine switch is turned to the “ON” position.

Vehicles with a smart entry & start system
The mirror will revert to the automatic mode each time the “ENGINE START STOP” switch is turned to IGNITION ON mode.

Adjusting the height of rear view mirror

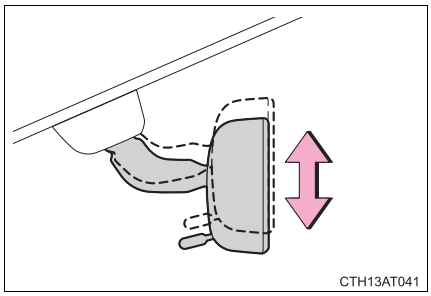

Adjust the height of the rear view mirror by moving it up and down.

To prevent sensor error (vehicles with an auto anti-glare inside rear view mirror)



To ensure that the sensors operate properly, do not touch or cover them.

CAUTION

Caution while driving

Do not adjust the position of the mirror while driving.
Doing so may lead to mishandling of the vehicle and cause an accident, resulting in death or serious injury.

Outside rear view mirrors

Mirror angle can be adjusted using the switch.

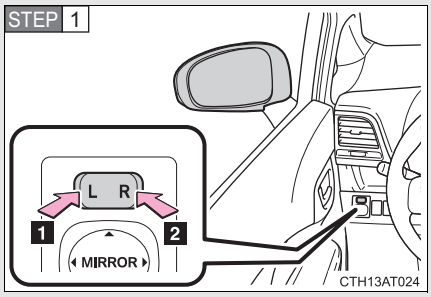

To select a mirror to adjust, press the switch.

1 Left
2 Right

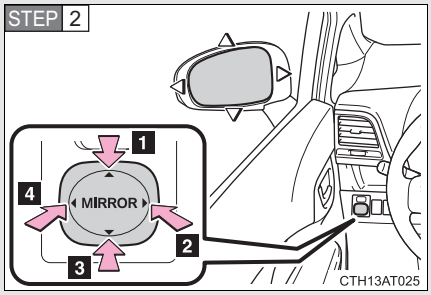

To adjust the mirror, press the switch.

1 Up
2 Right
3 Down
4 Left

Folding the mirrors

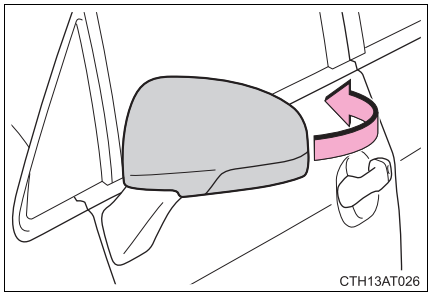

Push the mirror back in the direction of the vehicle's rear.

■ **Mirror angle can be adjusted when**

Vehicles without a smart entry & start system
The engine switch is in the “ACC” or “ON” position.

Vehicles with a smart entry & start system
The “ENGINE START STOP” switch is in ACCESSORY or IGNITION ON mode.

■ **When the mirrors are fogged up (vehicles with outside rear view mirror defoggers)**

Turn on the mirror defoggers to defog the mirrors. (→P. 288)

CAUTION

■ **When driving the vehicle**

Observe the following precautions while driving.
Failure to do so may result in loss of control of the vehicle and cause an accident, resulting in death or serious injury.

- Do not adjust the mirrors while driving.
- Do not drive with the mirrors folded.
- Both the driver and passenger side mirrors must be extended and properly adjusted before driving.

■ **When a mirror is moving**

To avoid personal injury and mirror malfunction, be careful not to get your hand caught by the moving mirror.

■ **When the mirror defoggers are operating (vehicles with outside rear view mirror defoggers)**

Do not touch the rear view mirror surfaces, as they can become very hot and burn you.

Power windows

The power windows can be opened and closed using the switches.

Operating the switch moves the windows as follows:

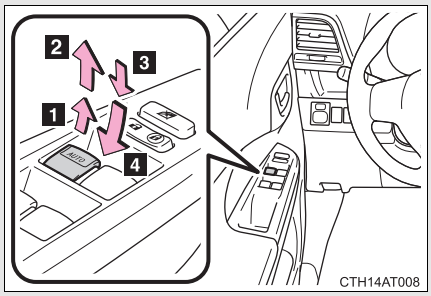

1 Closing
2 One-touch closing (driver's side only)*
3 Opening
4 One-touch opening (driver's side only)*

*: To stop the window partway, operate the switch in the opposite direction.

Window lock switch

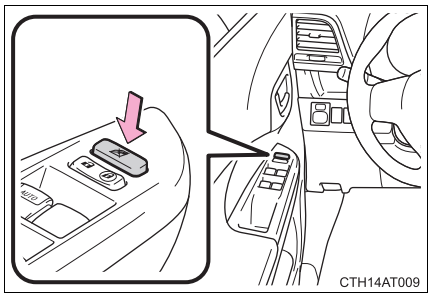

Press the switch down to lock the passenger window switches.

Use this switch to prevent children from accidentally opening or closing a passenger window.

The power windows can be operated when

Vehicles without a smart entry & start system
The engine switch is in the "ON" position.

Vehicles with a smart entry & start system
The "ENGINE START STOP" switch is in IGNITION ON mode.

Operating the power windows after turning the engine off

Vehicles without a smart entry & start system

The power windows can be operated for approximately 45 seconds even after the engine switch is turned to the “ACC” or “LOCK” position. They cannot, however, be operated once either front door is opened.

Vehicles with a smart entry & start system

The power windows can be operated for approximately 45 seconds even after the “ENGINE START STOP” switch is turned to ACCESSORY mode or turned off. They cannot, however, be operated once either front door is opened.

Jam protection function (driver’s side only)

If an object becomes caught between the window and the window frame, window travel is stopped and the window is opened slightly.

When the power window does not close normally

If the jam protection function is operating abnormally and a window cannot be closed, perform the following operations using the power window switch on the driver’s door.

- Vehicles without a smart entry & start system: After stopping the vehicle, the window can be closed by holding the power window switch in the one-touch closing position while the engine switch is turned to the “ON” position.
- Vehicles with a smart entry & start system: After stopping the vehicle, the window can be closed by holding the power window switch in the one-touch closing position while the “ENGINE START STOP” switch is turned to IGNITION ON mode.
- If the window still cannot be closed even by carrying out the operation explained above, initialize the function by performing the following procedure.

STEP 1 Hold the power window switch in the one-touch closing position. Continue holding the switch for a further 6 seconds after the window has closed.

STEP 2 Hold the power window switch in the one-touch opening position. Continue holding the switch for a further 2 seconds after the window has opened completely.

STEP 3 Hold the power window switch in the one-touch closing position once again. Continue holding the switch for a further 2 seconds after the window has closed.

If you release the switch while the window is moving, start again from the beginning.
If the window continues to close but then re-open slightly even after performing the above procedure correctly, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

■ Closing the windows

Observe the following precautions.
Failure to do so may result in death or serious injury.

- Check to make sure that all passengers do not have any part of their body in a position where it could be caught when a window is being operated.
- Do not allow children to operate the power windows. Closing a power window on someone can cause death or serious injury. The driver is responsible for instructing children not to operate the power windows.

■ Jam protection function (driver's side only)

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets caught just before the window fully closes.

Opening the fuel tank cap

Perform the following steps to open the fuel tank cap:

■ Before refueling the vehicle

Vehicles without a smart entry & start system

Turn the engine switch off and ensure that all the doors and windows are closed.

Vehicles with a smart entry & start system

Turn the “ENGINE START STOP” switch off and ensure that all the doors and windows are closed.

■ Opening the fuel tank cap

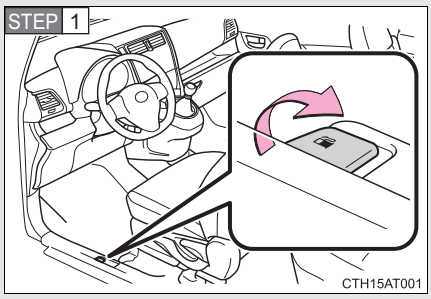

Pull up the opener to open the fuel filler door.

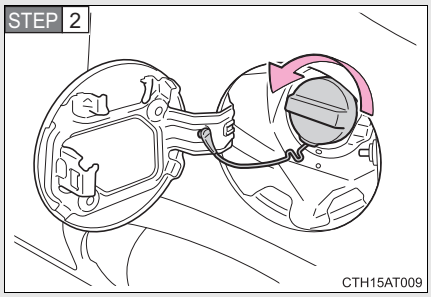

Turn the fuel tank cap slowly to open.

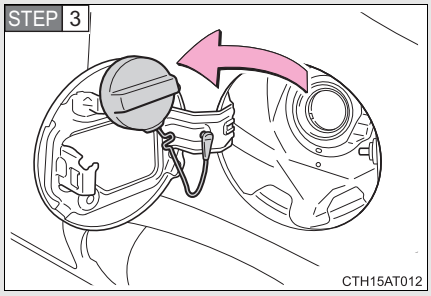

Hang the fuel tank cap on the back of the fuel filler door.

Closing the fuel tank cap

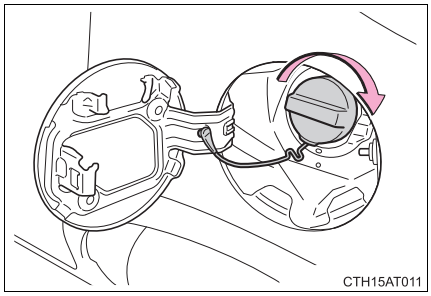

After refueling, turn the fuel tank cap until you hear a click. Once the cap is released, it will turn slightly in the opposite direction.

Use of ethanol blended gasoline in a gasoline engine

Toyota allows the use of ethanol blended gasoline where the ethanol content is up to 10%. Make sure that the ethanol blended gasoline to be used has a suitable Research Octane Number (→P. 533).

CAUTION

■ **When refueling the vehicle**

Observe the following precautions while refueling the vehicle. Failure to do so may result in death or serious injury.

- After exiting the vehicle and before opening the fuel door, touch an unpainted metal surface to discharge any static electricity. It is important to discharge static electricity before refueling because sparks resulting from static electricity can cause fuel vapors to ignite while refueling.
- Always hold the grips on the fuel tank cap and turn it slowly to remove it.
  A whooshing sound may be heard when the fuel tank cap is loosened. Wait until the sound cannot be heard before fully removing the cap. In hot weather, pressurized fuel may spray out the filler neck and cause injury.
- Do not allow anyone that has not discharged static electricity from their body to come close to an open fuel tank.
- Do not inhale vaporized fuel.
  Fuel contains substances that are harmful if inhaled.
- Do not smoke while refueling the vehicle.
  Doing so may cause the fuel to ignite and cause a fire.
- Do not return to the vehicle or touch any person or object that is statically charged.
  This may cause static electricity to build up, resulting in a possible ignition hazard.

■ **When refueling**

Securely insert the fuel nozzle into the fuel filler neck. If fuel is added with the nozzle slightly lifted away from the fuel filler neck, the automatic shut off function may not operate, resulting in fuel overflowing from the tank.

■ **When replacing the fuel cap**

Do not use anything but a genuine Toyota fuel tank cap designed for your vehicle. Doing so may cause a fire or other incident which may result in death or serious injury.

NOTICE

Refueling

Do not spill fuel during refueling.
Doing so may damage the vehicle, such as causing the emission control system to operate abnormally or damaging fuel system components or the vehicle's painted surface.

Engine immobilizer system

The vehicle's keys have built-in transponder chips that prevent the engine from starting if a key has not been previously registered in the vehicle's on-board computer.

Never leave the keys inside the vehicle when you leave the vehicle.

This system is designed to help prevent vehicle theft but does not guarantee absolute security against all vehicle thefts.

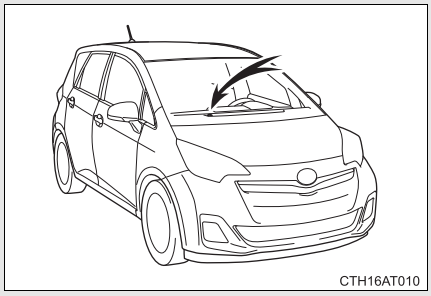

Vehicles without a smart entry & start system

The indicator light flashes after the key has been removed from the engine switch to indicate that the system is operating.

The indicator light stops flashing after the registered key has been inserted into the engine switch to indicate that the system has been canceled.

Vehicles with a smart entry & start system

The indicator light flashes after the “ENGINE START STOP” switch has been turned off to indicate that the system is operating.

The indicator light stops flashing after the “ENGINE START STOP” switch has been turned to ACCESSORY or IGNITION ON mode to indicate that the system has been canceled.

■ **System maintenance**

The vehicle has a maintenance-free type engine immobilizer system.

■ **Conditions that may cause the system to malfunction**

- If the grip portion of the key is in contact with a metallic object
- If the key is in close proximity to or touching a key to the security system (key with a built-in transponder chip) of another vehicle

Certifications for the engine immobilizer system

TOYOTA

TOYOTA MOTOR CORPORATION

1, TOYOTA-CHO, TOYOTA, AICHI, 471-8571 (Head Office)
or 471-8572 (Research & Development Group) JAPAN
TEL : +81-565-28-2121

R&TTE Declaration of Conformity

We,

Manufacturer's Name: TOYOTA MOTOR CORPORATION
Manufacturer's Address: 1, Toyota -cho, Toyota, Aichi, 471-8572, Japan

hereby declare under our sole responsibility that the product:

Product Name: Immobilizer
Product Model: TMIMB-3
to which this declaration relates is in conformity with the essential requirements and other relevant requirements of the R&TTE Directive (1999/5/EC). The product is compliant with the following standards and/or other normative documents:

-Health & safety requirements: EN 60950-1
-EMC requirements EN 301 489-01 & EN 301 489-03
-Effective uses of radio spectrum: EN 300 330-2

Supplementary information:

* CE mark	CE
* Member states intended for use	EU and EFTA

Date: March 23, 2010

Signature: Tetsuya Matsuo
Tetsuya Matsuo

Hereby, Toyota Motor Corporation, declares that this TMIMB-3 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Toyota Motor Corporation vakuuttaa täten että TMIMB-3 tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Hierbij verklaart Toyota Motor Corporation dat het toestel TMIMB-3 in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Par la présente Toyota Motor Corporation déclare que l'appareil TMIMB-3 est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Härmed intygar Toyota Motor Corporation att denna TMIMB-3 står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Undertegnede Toyota Motor Corporation erklærer herved, at følgende udstyr TMIMB-3 overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Toyota Motor Corporation, dass sich das Gerät TMIMB-3 in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Toyota Motor Corporation ΔΗΛΩΝΕΙ ΟΤΙ TMIMB-3 ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Con la presente Toyota Motor Corporation dichiara che questo TMIMB-3 è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Por medio de la presente Toyota Motor Corporation declara que el TMIMB-3 cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Toyota Motor Corporation declara que este TMIMB-3 está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Hawnhekk, Toyota Motor Corporation, jiddikjara li dan TMIMB-3 jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Käesolevaga kinnitab Toyota Motor Corporation seadme TMIMB-3 vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Alulírott, Toyota Motor Corporation nyilatkozom, hogy a TMIMB-3 megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Toyota Motor Corporation týmto vyhlasuje, že TMIMB-3 spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Toyota Motor Corporation tímto prohlašuje, že tento TMIMB-3 je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Toyota Motor Corporation izjavlja, da je ta TMIMB-3 v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Šiuo Toyota Motor Corporation deklaruoja, kad šis TMIMB-3 atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Ar šo Toyota Motor Corporation deklarē, ka TMIMB-3 atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Niniejszym Toyota Motor Corporation oświadcza, że TMIMB-3 jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Hér með lýsir Toyota Motor Corporation yfir því að TMIMB-3 er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

Toyota Motor Corporation erklærer herved at utstyret TMIMB-3 er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

С настоящето, Toyota Motor Corporation, декларира, че TMIMB-3 е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.

Prin prezenta, Toyota Motor Corporation, declară că aparatul TMIMB-3 este in conformitate cu cerințele esențiale și cu alte prevederi pertinente ale Directivei 1999/5/CE.

Ovim, Toyota Motor Corporation, izjavljuje da ovaj TMIMB-3 je usklađen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC.

Nepermjet kesaj, Toyota Motor Corporation, deklaroj qe ky TMIMB-3 eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.

Ovim Toyota Motor Corporation, izjavljuje da je TMIMB-3 u sklau s bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC i Pravilnika o RiTT opremi (NN 25/2012).

Ovim, Toyota Motor Corporation, deklariše da je TMIMB-3 u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 1999/5/EC.

Hereby, Tokai Rika Co., Ltd., declares that this RI-33BTY is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Tokai Rika Co., Ltd. vakuuttaa täten että RI-33BTY tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Hierbij verklaart Tokai Rika Co., Ltd. dat het toestel RI-33BTY in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Par la présente Tokai Rika Co., Ltd. déclare que l'appareil RI-33BTY est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Härmed intygar Tokai Rika Co., Ltd. att denna RI-33BTY står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Undertegnede Tokai Rika Co., Ltd. erklærer herved, at følgende udstyr RI-33BTY overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Tokai Rika Co., Ltd., dass sich das Gerät RI-33BTY in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Tokai Rika Co., Ltd. ΔΗΛΩΝΕΙ ΟΤΙ RI-33BTY ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Con la presente Tokai Rika Co., Ltd. dichiara che questo RI-33BTY è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Por medio de la presente Tokai Rika Co., Ltd. declara que el RI-33BTY cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Tokai Rika Co., Ltd. declara que este RI-33BTY está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Hawnhekk, Tokai Rika Co., Ltd., jiddikjara li dan RI-33BTY jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Käesolevaga kinnitab Tokai Rika Co., Ltd. seadme RI-33BTY vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Alulírott, Tokai Rika Co., Ltd. nyilatkozom, hogy a RI-33BTY megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Tokai Rika Co., Ltd. týmto vyhlasuje, že RI-33BTY spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Tokai Rika Co., Ltd. tímto prohlašuje, že tento RI-33BTY je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Tokai Rika Co., Ltd. izjavlja, da je ta RI-33BTY v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Šiuo Tokai Rika Co., Ltd. deklaruoja, kad šis RI-33BTY atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Ar šo Tokai Rika Co., Ltd. deklarē, ka RI-33BTY atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Niniejszym Tokai Rika Co., Ltd. oświadcza, że RI-33BTY jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Hér með lýsir Tokai Rika Co., Ltd. yfir því að RI-33BTY er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.

Tokai Rika Co., Ltd. erklærer herved at utstyret RI-33BTY er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

С настоящето, Tokai Rika Co., Ltd., декларира, че RI-33BTY е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.

Prin prezenta, Tokai Rika Co., Ltd., declară că aparatul RI-33BTY este in conformitate cu cerințele esențiale și cu alte prevederi pertinente ale Directivei 1999/5/CE.

Ovim, Tokai Rika Co., Ltd., izjavljuje da ovaj RI-33BTY je usklađen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC.

Nepermjet kesaj, Tokai Rika Co., Ltd., deklaroj qe ky RI-33BTY eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.

Ovim Tokai Rika Co., Ltd., izjavljuje da je RI-33BTY u sklau s bitnim zahtjevima i drugim relevantnim odredbama Direktive 1999/5/EC i Pravilnika o RiTT opremi (NN 25/2012).

Ovim, Tokai Rika Co., Ltd., deklariše da je RI-33BTY u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 1999/5/EC.

The DECLARATION of CONFORMITY (DoC) is available at the following address:
http://www.tokai-rika.co.jp/pc/

CE

NOTICE

To ensure the system operates correctly

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.

Double locking system*

Unauthorized access to the vehicle is prevented by disabling the door unlocking function from both the interior and exterior of the vehicle.

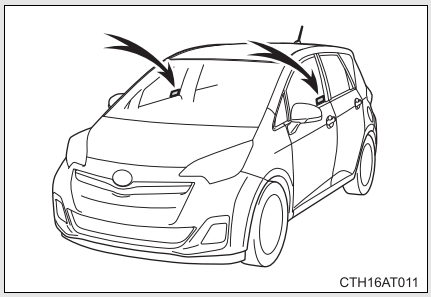

Vehicles employing this system have labels on the window glass of both front doors.

Setting the double locking system

Vehicles without smart entry & start system: Turn the engine switch off, have all the passengers exit the vehicle and ensure that all the doors are closed.

Vehicles with smart entry & start system: Turn the “ENGINE START STOP” switch off, have all the passengers exit the vehicle and ensure that all the doors are closed.

Using the entry function (vehicles with a smart entry & start system): Touch the sensor area on the outside door handle twice within 5 seconds.
Using the wireless remote control: Press 🔒 twice within 5 seconds.

Canceling the double locking system

Using the entry function (vehicles with a smart entry & start system): Hold either front outside door handle or push up the back door opener switch.
Using the wireless remote control: Press 🔓 .

*: If equipped

CAUTION

Double locking system precaution

Never activate the double locking system when there are people in the vehicle because all the doors cannot be opened from inside the vehicle.

Alarm*

The system sounds the alarm and flashes the lights when forced entry is detected.

■ Triggering of the alarm

The alarm is triggered in the following situations when the alarm is set:

- A locked door is unlocked or opened in any way other than using the entry function (vehicles with a smart entry & start system) or wireless remote control. (The doors will lock again automatically.)
- The hood is opened.

■ Setting the alarm system

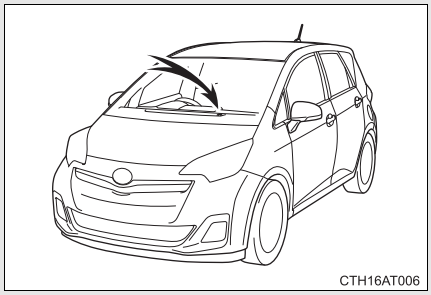

Close the doors and hood, and lock all the doors using the entry function (vehicles with a smart entry & start system) or wireless remote control. The system will be set automatically after 30 seconds.

The indicator light changes from being on to flashing when the system is set.

■ Deactivating or stopping the alarm

Do one of the following to deactivate or stop the alarm:

- Unlock the doors using the entry function (vehicles with a smart entry & start system) or wireless remote control.
- Start the engine. (The alarm will be deactivated or stopped after a few seconds.)

*: If equipped

■ **System maintenance**

The vehicle has a maintenance-free type alarm system.

■ **Items to check before locking the vehicle**

To prevent unexpected triggering of the alarm and vehicle theft, make sure of the following.

- Nobody is in the vehicle.
- The windows are closed before the alarm is set.
- No valuables or other personal items are left in the vehicle.

■ **Triggering of the alarm**

The alarm may be triggered in the following situations.
(Stopping the alarm deactivates the alarm system.)



- Vehicles without a smart entry & start system: The doors are unlocked using the key.

  Vehicles with a smart entry & start system: The doors are unlocked using the mechanical key.



- A person inside the vehicle opens a door or the hood.



- The battery is recharged or replaced when the vehicle is locked.

Alarm-operated door lock

- When the alarm is operating, the doors are locked automatically to prevent intruders.
- Do not leave the key inside the vehicle when the alarm is operating, and make sure the key is not inside the vehicle when recharging or replacing the battery.

Customization that can be configured at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional

Settings of the alarm using the key can be changed.
(Customizable features: →P. 536)

NOTICE

To ensure the system operates correctly

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.

Correct driving posture

Drive with a good posture as follows:

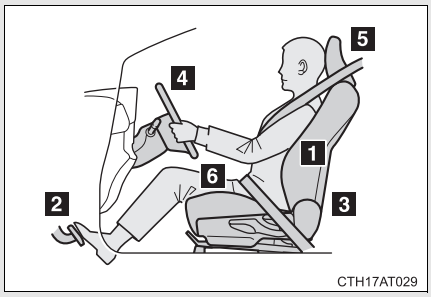

1. Sit upright and well back in the seat. (→P. 79)
2. Adjust the position of the seat forward or backward to ensure the pedals can be reached and easily depressed to the extent required. (→P. 79)
3. Adjust the seatback so that the controls are easily operable. (→P. 79)
4. Adjust the tilt position (and telescopic position if available) of the steering wheel downward so the airbag is facing your chest. (→P. 94)
5. Lock the head restraint in place with the center of the head restraint closest to the top of your ears. (→P. 85)
6. Wear the seat belt correctly. (→P. 87)

CAUTION

■ **While driving**

- Do not adjust the position of the driver's seat.
  Doing so could cause the driver to lose control of the vehicle.
- Do not place a cushion between the driver or passenger and the seatback.
  A cushion may prevent correct posture from being achieved, and reduce the effectiveness of the seat belt and head restraint, increasing the risk of death or serious injury to the driver or passenger.
- Do not place anything under the front seats except for putting them in the tray (if equipped).
  Objects placed under the front seats may become jammed in the seat tracks and stop the seat from locking in place. This may lead to an accident, resulting in death or serious injury. The adjustment mechanism may also be damaged.

■ **Adjusting the seat position**

- Take care when adjusting the seat position to ensure that other passengers are not injured by the moving seat.
- Do not put your hands under the seat or near the moving parts to avoid injury.
  Fingers or hands may become jammed in the seat mechanism.

SRS airbags

The SRS airbags inflate when the vehicle is subjected to certain types of severe impacts that may cause significant injury to the occupants. They work together with the seat belts to help reduce the risk of death or serious injury.

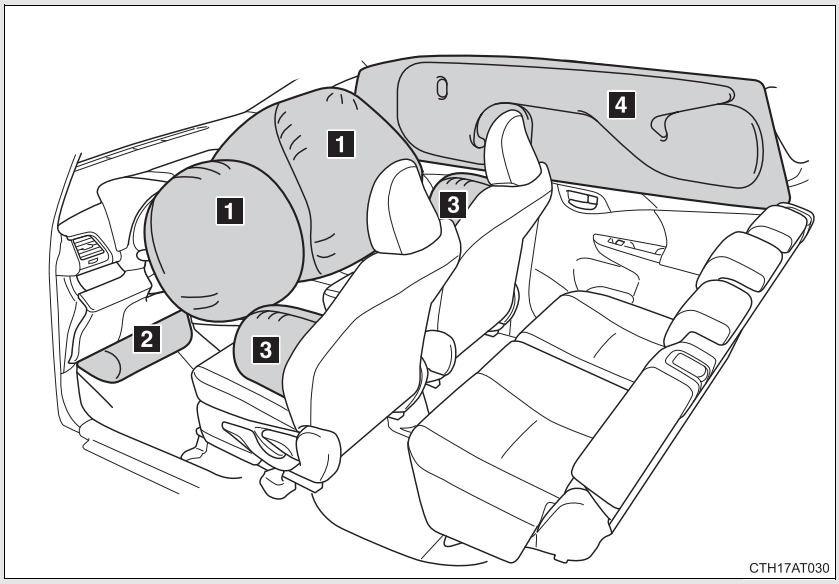

SRS front airbags

1 SRS driver airbag/front passenger airbag
Can help protect the head and chest of the driver and front passenger from impact with interior components

2 SRS driver knee airbag
Can help provide driver protection

SRS side and curtain shield airbags

3 SRS side airbags
Can help protect the torso of the front seat occupants

4 SRS curtain shield airbags (if equipped)
Can help protect primarily the head of occupants in the outer seats

SRS airbag system components

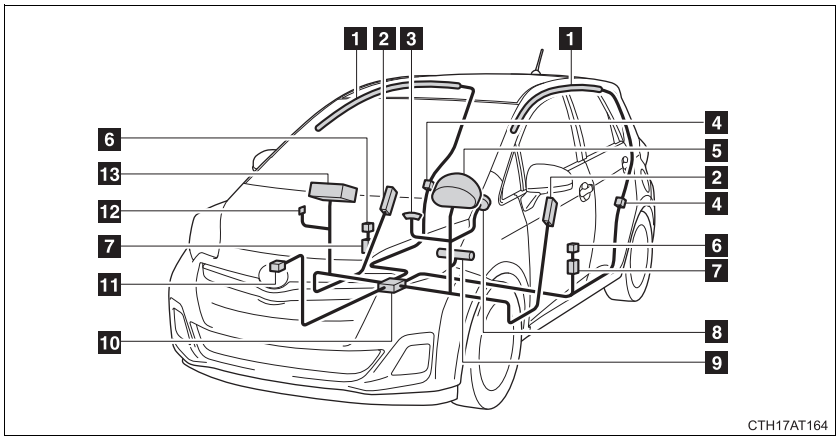

1. Curtain shield airbags (if equipped)
2. Side airbags
3. Airbag manual on-off indicator
4. Side impact sensors (rear) (if equipped)
5. SRS warning light
6. Side impact sensors (front)
7. Seat belt pretensioners
8. Driver airbag
9. Knee airbag
10. Airbag sensor assembly
11. Front impact sensor
12. Airbag manual on-off switch
13. Front passenger airbag

The main SRS airbag system components are shown above. The SRS airbag system is controlled by the airbag sensor assembly. As the airbags deploy, a chemical reaction in the inflators quickly fills the airbags with non-toxic gas to help restrain the motion of the occupants.

■ **If the SRS airbags deploy (inflate)**

- Bruising and slight abrasions may result from contact with a deploying (inflating) SRS airbag.
- A loud noise and white powder will be emitted.
- Parts of the airbag module (steering wheel hub, airbag cover and inflator) as well as the front seats, parts of the front and rear pillars, and roof side rails, may be hot for several minutes. The airbag itself may also be hot.
- The windshield may crack.

■ **SRS airbag deployment conditions (SRS front airbags)**

- The SRS front airbags will deploy in the event of an impact that exceeds the set threshold level (the level of force corresponding to an approximately 20 - 30 km/h [12 - 18 mph] frontal collision with a fixed wall that does not move or deform).

  However, this threshold velocity will be considerably higher if the vehicle strikes an object, such as a parked vehicle and sign pole, which can move or deform on impact, or if the vehicle is involved in an underride collision (e.g. a collision in which the front of the vehicle “underrides”, or goes under, the bed of a truck etc.).
- Depending on the type of collision, it is possible that only the seat belt pretensioners will activate.

■ **SRS airbag deployment conditions (SRS side and curtain shield airbags [if equipped])**

The SRS side and curtain shield airbags will deploy in the event of an impact that exceeds the set threshold level (the level of force corresponding to the impact force produced by an approximately 1500 kg [3300 lb.] vehicle colliding with the vehicle cabin from a direction perpendicular to the vehicle orientation at an approximate speed of 20 - 30 km/h [12 - 18 mph]).

Conditions under which the SRS airbags may deploy (inflate), other than a collision

The SRS front airbags may also deploy if a serious impact occurs to the underside of your vehicle. Some examples are shown in the illustration.



- Hitting a curb, edge of pavement or hard surface
- Falling into or jumping over a deep hole
- Landing hard or falling

Types of collisions that may not deploy the SRS airbags (SRS front airbags)

The SRS front airbags do not generally inflate if the vehicle is involved in a side or rear collision, if it rolls over, or if it is involved in a low-speed frontal collision. But, whenever a collision of any type causes sufficient forward deceleration of the vehicle, deployment of the SRS front airbags may occur.



- Collision from the side
- Collision from the rear
- Vehicle rollover

Types of collisions that may not deploy the SRS airbags (SRS side and curtain shield airbags [if equipped])

The SRS side and curtain shield airbags may not activate if the vehicle is subjected to a collision from the side at certain angles, or a collision to the side of the vehicle body other than the passenger compartment.



- Collision from the side to the vehicle body other than the passenger compartment
- Collision from the side at an angle

The SRS side and curtain shield airbags do not generally inflate if the vehicle is involved in a frontal or rear collision, if it rolls over, or if it is involved in a low-speed side collision.



- Collision from the front
- Collision from the rear
- Vehicle rollover

When to contact an authorized Toyota dealer or repairer, or another duly qualified and equipped professional

In the following cases, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional as soon as possible.

- Any of the SRS airbags have been inflated.



- The front of the vehicle is damaged or deformed, or was involved in an accident that was not severe enough to cause the SRS front airbags to inflate.



- A portion of a door is damaged or deformed, or the vehicle was involved in an accident that was not severe enough to cause the SRS side and curtain shield airbags (if equipped) to inflate.



- The pad section of the steering wheel, dashboard near the front passenger airbag or lower portion of the instrument panel is scratched, cracked, or otherwise damaged.



- The surface of the seats with the side airbag is scratched, cracked, or otherwise damaged.
- Vehicles with SRS curtain shield airbags: The portion of the front pillars, rear pillars or roof side rail garnishes (padding) containing the curtain shield airbags is inside scratched, cracked, or otherwise damaged.

CAUTION

SRS airbag precautions

Observe the following precautions regarding the SRS airbags.
Failure to do so may cause death or serious injury.

- The driver and all passengers in the vehicle must wear their seat belts properly.
  The SRS airbags are supplemental devices to be used with the seat belts.
- The SRS driver airbag deploys with considerable force, and can cause death or serious injury especially if the driver is very close to the airbag.

  Since the risk zone for the driver's airbag is the first 50 - 75 mm (2 - 3 in.) of inflation, placing yourself 250 mm (10 in.) from your driver airbag provides you with a clear margin of safety. This distance is measured from the center of the steering wheel to your breastbone. If you sit less than 250 mm (10 in.) away now, you can change your driving position in several ways:

  - Move your seat to the rear as far as you can while still reaching the pedals comfortably.
  - Slightly recline the back of the seat. Although vehicle designs vary, many drivers can achieve the 250 mm (10 in.) distance, even with the driver seat all the way forward, simply by reclining the back of the seat somewhat. If reclining the back of your seat makes it hard to see the road, raise yourself by using a firm, non-slippery cushion, or raise the seat if your vehicle has that feature.
  - If your steering wheel is adjustable, tilt it downward. This points the airbag toward your chest instead of your head and neck.

  The seat should be adjusted as recommended above, while still maintaining control of the foot pedals, steering wheel, and your view of the instrument panel controls.

CAUTION

■ **SRS airbag precautions**

- The SRS front passenger airbag also deploys with considerable force, and can cause death or serious injury especially if the front passenger is very close to the airbag. The front passenger seat should be as far from the airbag as possible with the seatback adjusted, so the front passenger sits upright.
- Improperly seated and/or restrained infants and children can be killed or seriously injured by a deploying airbag. An infant or child who is too small to use a seat belt should be properly secured using a child restraint system. Toyota strongly recommends that all infants and children be placed in the rear seats of the vehicle and properly restrained. The rear seats are safer for infants and children than the front passenger seat. (→P. 138)



- Do not sit on the edge of the seat or lean against the dashboard.



- Do not allow a child to stand in front of the SRS front passenger airbag unit or sit on the knees of a front passenger.
- Do not allow the front seat occupants to hold items on their knees.

CAUTION

■ **SRS airbag precautions**

- Vehicles without SRS curtain shield airbags: Do not lean against the front door.
- Vehicles with SRS curtain shield airbags: Do not lean against the door, the roof side rail or the front, side and rear pillars.

- Do not allow anyone to kneel on the passenger seat toward the door or put their head or hands outside the vehicle.



- Do not attach anything to or lean anything against areas such as the dashboard, steering wheel pad and lower portion of the instrument panel.
  These items can become projectiles when the SRS driver, front passenger and knee airbags deploy.

CAUTION

■ **SRS airbag precautions**



- Vehicles without SRS curtain shield airbags: Do not attach anything to areas such as a door, windshield glass and side door glass.
- Vehicles with SRS curtain shield airbags: Do not attach anything to areas such as a door, windshield glass, side door glass, front or rear pillar, roof side rail and assist grip. (Except for the speed limit label →P. 474)



- Vehicles without a smart entry & start system: Do not attach any heavy, sharp or hard objects such as keys and accessories to the key. The objects may restrict the SRS knee airbag inflation or be thrust into the driver's seat area by the force of the deploying airbag, thus causing a danger.
- If a vinyl cover is put on the area where the SRS knee airbag will deploy, be sure to remove it.
- Do not use seat accessories which cover the parts where the SRS side airbags inflate as they may interfere with inflation of the airbags. Such accessories may prevent the side airbags from activating correctly, disable the system or cause the side airbags to inflate accidentally, resulting in death or serious injury.
- Do not strike or apply significant levels of force to the area of the SRS airbag components.
  Doing so can cause the SRS airbags to malfunction.
- Do not touch any of the component parts immediately after the SRS airbags have deployed (inflated) as they may be hot.
- If breathing becomes difficult after the SRS airbags have deployed, open a door or window to allow fresh air in, or leave the vehicle if it is safe to do so. Wash off any residue as soon as possible to prevent skin irritation.

CAUTION

SRS airbag precautions

- Vehicles without SRS curtain shield airbags: If the areas where the SRS airbags are stored, such as the steering wheel pad, are damaged or cracked, have them replaced by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
- Vehicles with SRS curtain shield airbags: If the areas where the SRS airbags are stored, such as the steering wheel pad and front and rear pillar garnishes, are damaged or cracked, have them replaced by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Modification and disposal of SRS airbag system components

Do not dispose of your vehicle or perform any of the following modifications without consulting any authorized Toyota dealer or repairer, or another duly qualified and equipped professional. The SRS airbags may malfunction or deploy (inflate) accidentally, causing death or serious injury.

- Installation, removal, disassembly and repair of the SRS airbags
- Repairs, modifications, removal or replacement of the steering wheel, instrument panel, dashboard, seats or seat upholstery, front, side and rear pillars or roof side rails
- Repairs or modifications of the front fender, front bumper, or side of the occupant compartment
- Installation of grille guard (bull bars, kangaroo bar, etc.), snow plows or winches
- Modifications to the vehicle's suspension system
- Installation of electronic devices such as mobile two-way radios (RF-transmitter) and CD players

Airbag manual on-off system

This system deactivates the front passenger airbag.
Only deactivate the airbags when using a child restraint system on the front passenger seat.

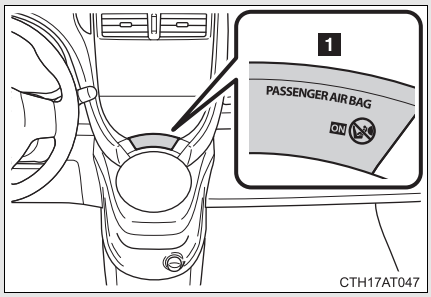

1 Airbag manual on-off indicator

Vehicles without a smart entry & start system

This indicator light turns on when the airbag system is on (only when the engine switch is in the “ON” position).

Vehicles with a smart entry & start system

This indicator light turns on when the airbag system is on (only when the “ENGINE START STOP” switch is in IGNITION ON mode).

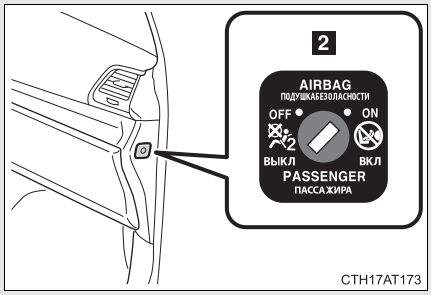

2 Airbag manual on-off switch

Deactivating the front seat passenger airbag

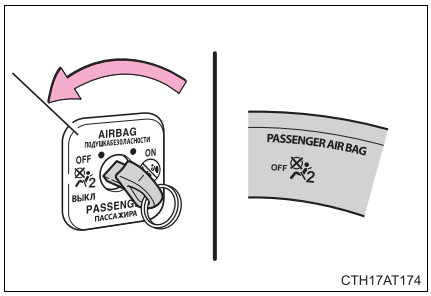

Vehicles without a smart entry & start system

Insert the key into the cylinder and turn to the “OFF” position.

The “OFF” indicator light turns on (only when the engine switch is in the “ON” position).

Vehicles with a smart entry & start system

Insert the mechanical key into the cylinder and turn to the “OFF” position.

The “OFF” indicator light turns on (only when the “ENGINE START STOP” switch is in IGNITION ON mode).

Airbag manual on-off indicator information

If any of the following problems occur, it is possible that there is a malfunction in the system. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

- Neither “ON” nor “OFF” comes on.
- The indicator light does not change when the airbag manual on-off switch is switched to “ON” or “OFF”.

CAUTION

■ **When installing a child restraint system**

For safety reasons, always install a child restraint system in a rear seat. In the event that the rear seat cannot be used, the front seat can be used as long as the airbag manual on-off system is set to “OFF”.
If the airbag manual on-off system is left “ON”, the strong impact of the airbag deployment (inflation) may cause serious injury or even death.

■ **When a child restraint system is not installed on the front passenger seat**

Ensure that the airbag manual on-off system is set to “ON”.
If it is left “OFF”, the airbag may not deploy in the event of an accident, which may result in serious injury or even death.

Child restraint systems

Toyota strongly urges the use of child restraint systems.

Points to remember

Studies have shown that installing a child restraint on a rear seat is much safer than installing one on the front passenger seat.

- Choose a child restraint system that suits your vehicle and is appropriate to the age and size of the child.
- For installation details, follow the instructions provided with the child restraint system.
  General installation instructions are provided in this manual.
  (→P. 147)
- If child restraint system regulations exist in the country where you reside, please contact your Toyota dealer for the child restraint system installation.
- Toyota recommends that you use a child restraint system which conforms to the regulation ECE No.44.

Types of child restraints

Child restraint systems are classified into the following 5 groups according to the regulation ECE No.44:

Group 0: Up to 10 kg (22 lb.) (0 - 9 months)

Group 0^+: Up to 13 kg (28 lb.) (0 - 2 years)

Group I: 9 to 18 kg (20 to 39 lb.) (9 months - 4 years)

Group II: 15 to 25 kg (34 to 55 lb.) (4 years - 7 years)

Group III: 22 to 36 kg (49 to 79 lb.) (6 years - 12 years)

In this owner's manual, the following 3 types of popular child restraint systems that can be secured with the seat belts are explained:

Baby seat

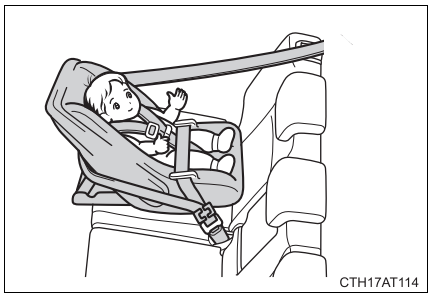

Equal to Group 0 and 0^+ of ECE No.44

Child seat

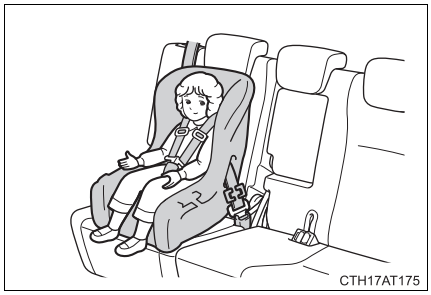

Equal to Group 0^+ and I of ECE No.44

Junior seat

Equal to Group II and III of ECE No.44

Child restraint system suitability for various seating positions

Information provided in the table shows your child restraint system suitability for various seating positions.

Seating position / Mass groups	Front passenger seat		Rear seat	
	Airbag manual on-off switch			
	ON	OFF	Outside	Center
0 Up to 10 kg (22 lb.) (0 - 9 months)	X Never put	U*3, L1*3	U*2, L1*2	L1*2
0+ Up to 13 kg (28 lb.) (0 - 2 years)	X Never put	U*3, L1*3	U*2, L1*2	L1*2
I 9 to 18 kg (20 to 39 lb.) (9 months - 4 years)	Rear-facing — X Never put Forward-facing — UF*3	U*3	U*2	L2*2, L4*1,2
II, III 15 to 36 kg (34 to 79 lb.) (4 - 12 years)	UF*3	U*3	U*2, L5*1,2	L3*1,2, L5*1,2

Key of letters inserted in the above table:

U: Suitable for “universal” category child restraint system approved for the use in this mass group.

UF: Suitable for forward-facing “universal” category child restraint system approved for the use in this mass group.

L1: Suitable for “TOYOTA G 0+, BABYSAFE PLUS with SEAT BELT FIXATION, BASE PLATFORM” (0 to 13 kg[0 to 28 lb.]) approved for the use in this mass group.

L2: Suitable for “TOYOTA DUO+” (without ISOFIX, 9 to 18 kg [20 to 39 lb.]) approved for the use in this mass group.

L3: Suitable for “TOYOTA KID” (15 to 36 kg [34 to 79 lb.]) approved for the use in this mass group.

L4: Suitable for “TOYOTA G 0/1” (without ISOFIX, 9 to 18 kg [20 to 39 lb.]) approved for the use in this mass group.

L5: Suitable for “TOYOTA KIDFIX” (15 to 36 kg [34 to 79 lb.]) approved for the use in this mass group.

X: Not suitable seat position for children in this mass group.

*1: When you use a child restraint system in this position, remove the head restraint.

*2: Adjust the rear seat back to 1st lock position from the most upright position.

*3: Adjust the front seat back to upright position.

The child restraint systems mentioned in the table may not be available outside of the EU area.

Other child restraint systems different from the systems mentioned in the table can be used, but the suitability of the systems must be carefully checked with the child restraint system manufacturer and retailer.

Child restraint system suitability for various seating positions (with ISOFIX rigid anchors)

Information provided in the table shows your child restraint system suitability for various seating positions.

Mass groups	Size class	Fixture	Vehicle ISOFIX positions
			Rear outside
Carrycot	F	ISO/L1	X
	G	ISO/L2	X
		(1)	X
Group 0 Up to 10 kg (22 lb.)	E	ISO/R1	IL1*2
		(1)	X
Group 0+ Up to 13 kg (28 lb.)	E	ISO/R1	X
	D	ISO/R2	X
	C	ISO/R3	X
		(1)	X
Group I 9 to 18 kg (20 to 39 lb.)	D	ISO/R2	X
	C	ISO/R3	IL1*2
	B	ISO/F2	IUF*1,2
	B1	ISO/F2X	IUF*1,2
	A	ISO/F3	IUF*1,2, IL2*1,2
		(1)	X
Group II 15 to 25 kg (34 to 55 lb.)		(1)	X
Group III 22 to 36 kg (49 to 79 lb.)		(1)	X

(1) For the CRS which do not carry the ISO/XX size class identification (A to G), for the applicable mass group, the car manufacturer shall indicate the vehicle specific ISOFIX child restraint system(s) recommended for each position

Key of letters inserted in the above table:

IUF: Suitable for ISOFIX forward-facing child restraints systems of universal category approved for the use in this mass group.

IL1: Suitable for “TOYOTA G 0/1 with G 0/1 ISOFIX PLATFORM TYPE “B”, REARWARD FACING” (0 to 18 kg [0 to 39 lb.]) approved for the use in this mass group.

IL2: Suitable for “TOYOTA G 0/1 with G 0/1 ISOFIX PLATFORM TYPE “F”, FORWARD FACING” (9 to 18 kg [20 to 39 lb.]) approved for the use in this mass group.

X: ISOFIX position not suitable for ISOFIX child restraint systems in this mass group and/or this size class.

*1: When you use a child restraint system in this position, remove the head restraint.

*2: Adjust the rear seat back to 1st lock position from the most upright position.

The child restraint systems mentioned in the table may not be available outside of the EU area.

Other child restraint systems different from the systems mentioned in the table can be used, but the suitability of the systems must be carefully checked with the child restraint system manufacturer and retailer.

Selecting an appropriate child restraint system

- Use a child restraint system appropriate for the child until the child becomes large enough to properly wear the vehicle’s seat belt.
- If the child is too large for a child restraint system, sit the child on a rear seat and use the vehicle's seat belt. (→P. 87)

CAUTION

Using a child restraint system

The use of a child restraint system not suitable for the vehicle may not properly secure the infant or child. It may result in death or serious injury (in the event of sudden braking or an accident).

Child restraint precautions

- For effective protection in automobile accidents and sudden stops, a child must be properly restrained, using a seat belt or child restraint system depending on the age and size of the child. Holding a child in your arms is not a substitute for a child restraint system. In an accident, the child can be crushed against the windshield, or between you and the vehicle's interior.
- Toyota strongly urges the use of a proper child restraint system that conforms to the size of the child, installed on the rear seat. According to accident statistics, the child is safer when properly restrained in the rear seat than in the front seat.

CAUTION

Child restraint precautions

- Never use a rear-facing child restraint system on the front passenger seat when the airbag manual on-off switch is on. (→P. 135)
  In the event of an accident, the force of the rapid inflation of the front passenger airbag can cause death or serious injury to the child.
- A forward-facing child restraint system may be installed on the front passenger seat only when it is unavoidable. A child restraint system that requires a top tether strap should not be used in the front passenger seat since there is no top tether strap anchor for the front passenger seat. Adjust the seatback as upright as possible and always move the seat as far back as possible because the front passenger airbag could inflate with considerable speed and force. Otherwise, the child may be killed or seriously injured.
- Vehicles without SRS curtain shield airbags: Do not allow the child to lean his/her head or any part of his/her body against the door or the area of the seat from which the SRS side airbags deploy even if the child is seated in the child restraint system. It is dangerous if the SRS side airbags inflate, and the impact could cause death or serious injury to the child.
- Vehicles with SRS curtain shield airbags: Do not allow the child to lean his/her head or any part of his/her body against the door or the area of the seat, front and rear pillars or roof side rails from which the SRS side airbags or SRS curtain shield airbags deploy even if the child is seated in the child restraint system. It is dangerous if the SRS side airbags and curtain shield airbags inflate, and the impact could cause death or serious injury to the child.
- Make sure you have complied with all installation instructions provided by the child restraint manufacturer and that the system is properly secured. If it is not secured properly, it may cause death or serious injury to the child in the event of a sudden stop, sudden swerve or an accident.

CAUTION

When children are in the vehicle

Do not allow children to play with the seat belt. If the seat belt becomes twisted around a child's neck, choking or other serious injuries may result in death.
If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.

When the child restraint system is not in use

- Keep the child restraint system properly secured on the seat even if it is not in use. Do not store the child restraint system unsecured in the passenger compartment.
- If it is necessary to detach the child restraint system, remove it from the vehicle or store it securely in the luggage compartment. This will prevent it from injuring passengers in the event of a sudden stop, sudden swerve or accident.

Installing child restraints

Follow the child restraint system manufacturer's instructions. Firmly secure child restraints to the seats using a seat belt or ISOFIX rigid anchors. Attach the top strap when installing a child restraint.

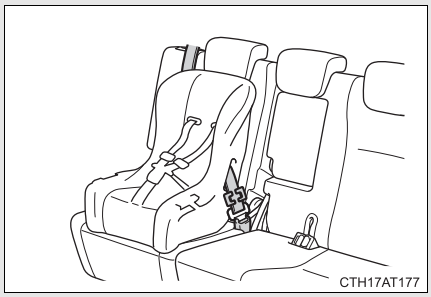

Seat belts (An ELR belt requires a locking clip.)

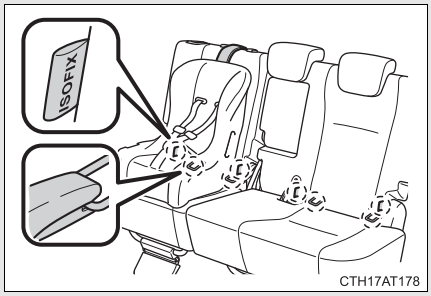

ISOFIX rigid anchors (ISOFIX child restraint system)

Lower anchors are provided for the outer rear seats. (Tags displaying the location of the anchors are attached to the seats.)

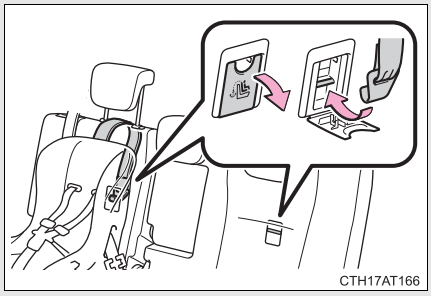

Anchor brackets (for the top strap)

An anchor bracket is provided for the outer rear seats.

Installing child restraints using a seat belt

■ Rear facing — Baby seat/child seat

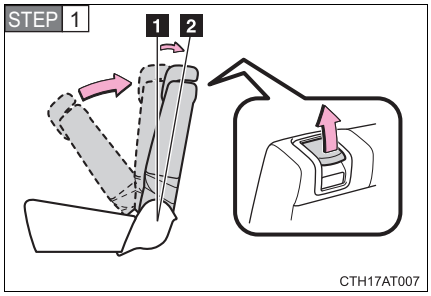

1 1st lock position

2 2nd lock position

Fold the seatback forward and then back to the 1st lock position (most upright position) until it locks into place. Adjust the seatback to the 2nd lock position. (→P. 80)

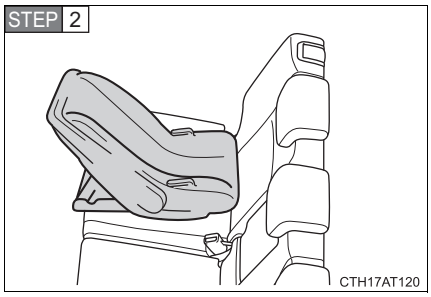

Place the child restraint system on the rear seat facing the rear of the vehicle.

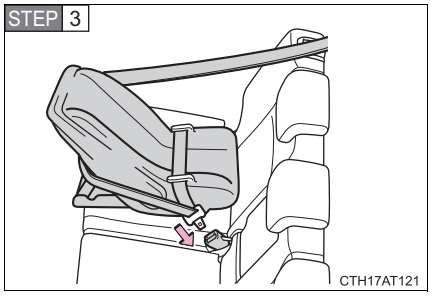

Run the seat belt through the child restraint system and insert the plate into the buckle. Make sure that the belt is not twisted.

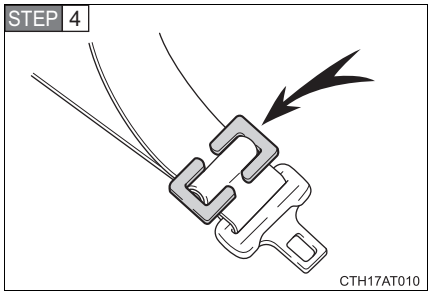

Install a locking clip near the tab of the lap and shoulder belt by inserting the lap and shoulder webbing through the recesses of the locking clip.

■ Forward facing — Child seat

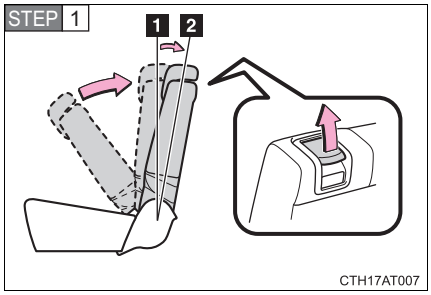

1 1st lock position

2 2nd lock position

Fold the seatback forward and then back to the 1st lock position (most upright position) until it locks into place. Adjust the seatback to the 2nd lock position. (→P. 80)

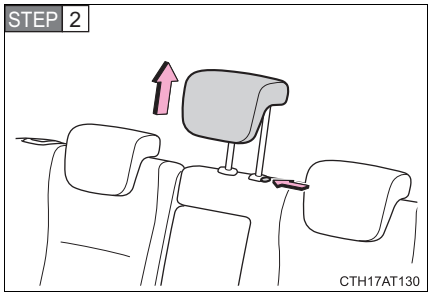

Depending on the type of the child restraint system and its seating position, remove the head restraint of the seat.
(→P. 140)

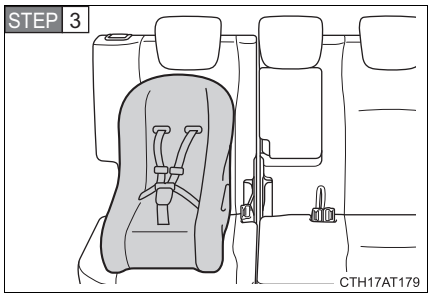

Place the child restraint system on the seat facing the front of the vehicle.

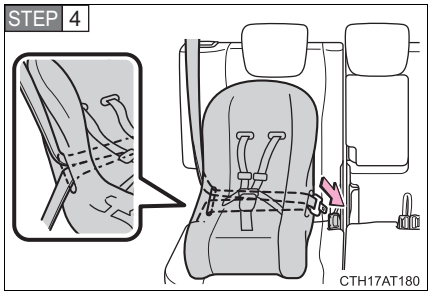

Run the seat belt through the child restraint system and insert the plate into the buckle. Make sure that the belt is not twisted.

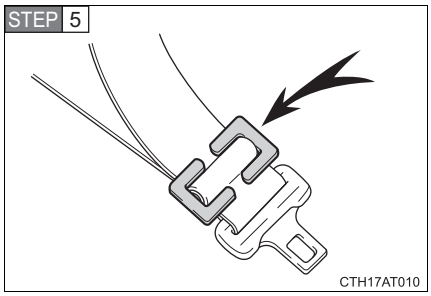

Install a locking clip near the tab of the lap and shoulder belt by inserting the lap and shoulder webbing through the recesses of the locking clip.

■ Junior seat

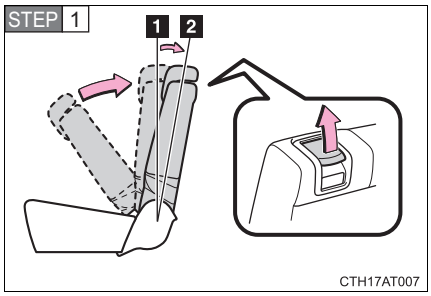

1 1st lock position

2 2nd lock position

Fold the seatback forward and then back to the 1st lock position (most upright position) until it locks into place. Adjust the seatback to the 2nd lock position. (→P. 80)

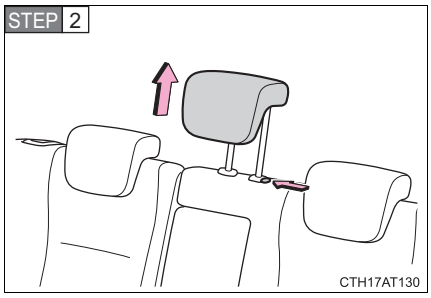

Depending on the type of the child restraint system and its seating position, remove the head restraint of the seat.
(→P. 140)

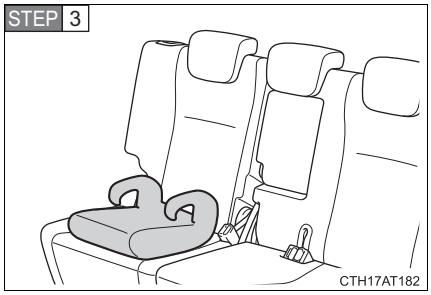

Place the child restraint system on the seat facing the front of the vehicle.

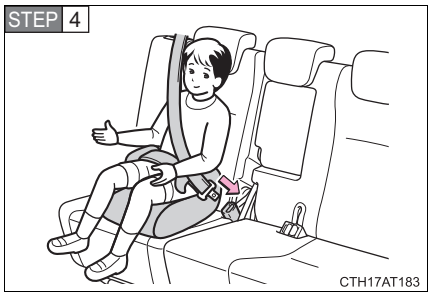

Sit the child in the child restraint system. Fit the seat belt to the child restraint system according to the manufacturer's instructions and insert the plate into the buckle. Make sure that the belt is not twisted.

Check that the shoulder belt is correctly positioned over the child's shoulder and that the lap belt is as low as possible.
(→P. 87)

Removing a child restraint installed with a seat belt

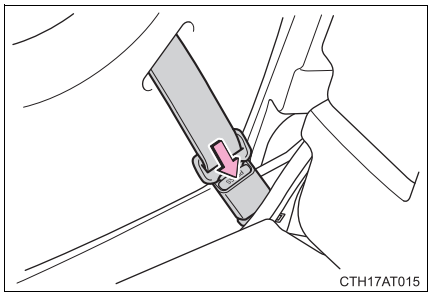

Push the buckle release button and fully retract the seat belt.

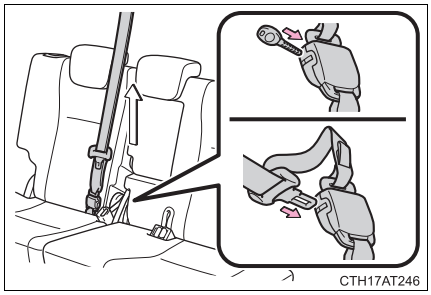

Rear center seat: Release the center seat belt as shown in the illustration after removing the child restraint. (→P. 88)

Installation with ISOFIX rigid anchors (ISOFIX child restraint system)

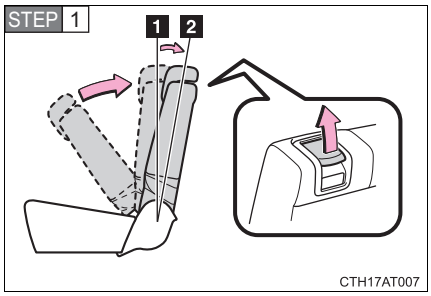

1 1st lock position

2 2nd lock position

Fold the seatback forward and then back to the 1st lock position (most upright position) until it locks into place. Adjust the seatback to the 2nd lock position. (→P. 80)

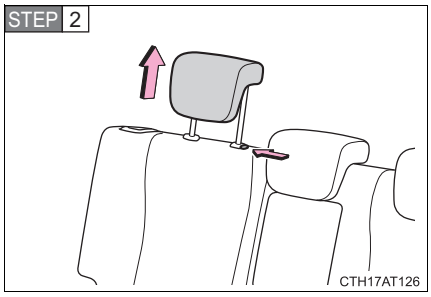

Depending on the type of the child restraint system, remove the head restraint of the seat. (→P. 142)

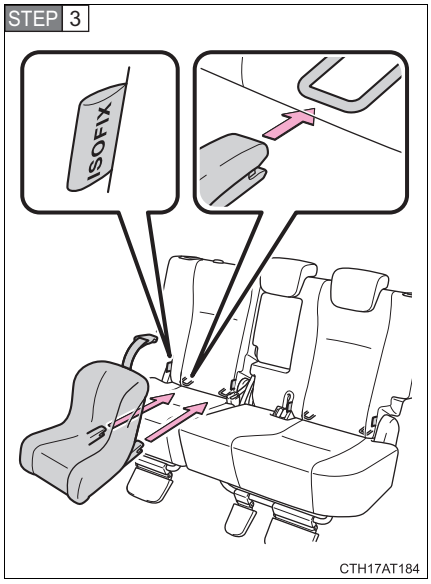

Widen the gap between the seat cushion and seatback slightly, latch the buckles onto the exclusive fixing bars.

If the child restraint has a top strap, the top strap should be latched onto the anchor bracket.

Child restraint systems with a top strap

STEP 1 Secure the child restraint system using a seat belt or ISOFIX rigid anchors.

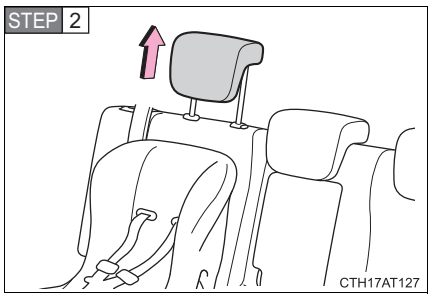

If the head restraint is not removed, adjust the head restraint to the uppermost position.

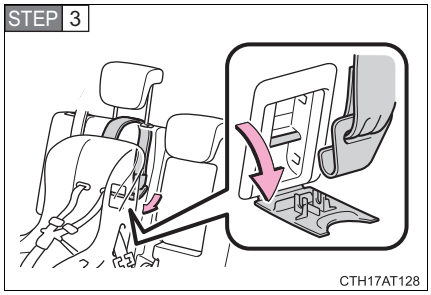

Open the anchor bracket cover, latch the hook onto the anchor bracket and tighten the top strap.

Make sure the top strap is securely latched.

■ **When installing a child restraint system using a seat belt**

You need a locking clip to install the child restraint system using a seat belt. Follow the instructions provided by the manufacturer of the system. If your child restraint system does not provide a locking clip, you can purchase the following item from any authorized Toyota dealer or repairer, or another duly qualified and equipped professional:

Locking clip for child restraint system
(Part No. 73119-22010)

CAUTION

■ **When installing a child restraint system**

Follow the directions given in the child restraint system installation manual and fix the child restraint system securely in place.
If the child restraint system is not correctly fixed in place, the child or other passengers may be seriously injured or even killed in the event of sudden braking, sudden swerving or an accident.



- If the driver's seat interferes with the child restraint system and prevents it from being attached correctly, attach the child restraint system to the right-hand rear seat (left-hand drive vehicles) or the left-hand rear seat (right-hand drive vehicles).
- Adjust the front passenger seat so that it does not interfere with the child restraint system.



- When installing a forward-facing child restraint system on the front passenger seat, move the seat as far back as possible.
  Failure to do so may result in death or serious injury if the airbags deploy (inflate).

CAUTION

■ When installing a child restraint system





- Never use a rear-facing child restraint system on the front passenger seat when the airbag manual on-off switch is on. (→P. 135)

  The force of the rapid inflation of the front passenger airbag can cause death or serious injury to children in the event of an accident.

  There is a label(s) on the passenger side sun visor, indicating it is forbidden to attach a rear-facing child restraint system to the front passenger seat.

  Details of the label(s) are shown in the illustration below.

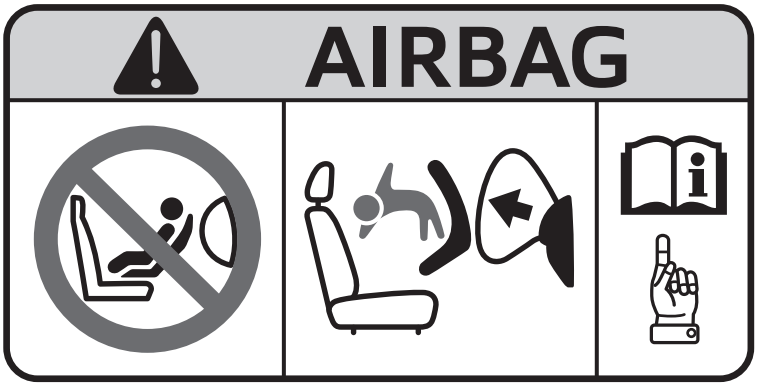

CAUTION

When installing a child restraint system

- If child restraint system regulations exist in the country where you reside, please contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for the child restraint system installation.
- When installing a child restraint system on the rear center seat, adjust both seatbacks at the same angle. The seatbacks must be adjusted to the same angle. Otherwise, the child restraint system cannot be securely restrained and this may cause death or serious injuries in the event of sudden braking, sudden swerving or an accident.
- When a junior seat is installed, always ensure that the shoulder belt is positioned across the center of the child's shoulder. The belt should be kept away from the child's neck, but not so that it could fall off the child's shoulder. Failure to do so may result in death or serious injury in the event of sudden braking, sudden swerving or an accident.
- Ensure that the belt and plate are securely locked and the seat belt is not twisted.
- Push and pull the child restraint system from side to side and forward to be sure it is secure.
- After securing a child restraint system, never adjust the seat.
- Follow all installation instructions provided by the child restraint system manufacturer.



- When using the right side seat for the child restraint system, do not sit in the center seat. Seat belt function may be impaired, such as being positioned overly high or loose-fitting, which may result in death or serious injury in the event of sudden braking or an accident.

CAUTION

To correctly attach a child restraint system to the anchors

When using the lower anchors, be sure that there are no foreign objects around the anchors and that the seat belt is not caught behind the child restraint system. Make sure the child restraint system is securely attached, or it may cause death or serious injury to the child or other passengers in the event of sudden braking, sudden swerve or an accident.

When driving 2

2-1. Driving procedures

Driving the vehicle 160
Engine (ignition) switch (vehicles with a smart entry & start system)..... 176
Engine (ignition) switch (vehicles without a smart entry & start system)..... 186
Multidrive 190
Multi-mode Manual Transmission 196
Manual Transmission 201
Turn signal lever 204
Parking brake 205
Horn 206

2-2. Instrument cluster

Gauges and meters 207
Indicators and warning lights 213
Multi-information display ... 219

2-3. Operating the lights and wipers

Headlight switch..... 222
Fog light switch 228
Windshield wiper and washer 230
Rear window wiper and washer 236

2-4. Using other driving systems

Stop & Start system 238
Cruise control..... 245
Driving assist systems 249
Diesel particulate filter system 255

2-5. Driving information

Cargo and luggage 257
Winter driving tips 259
Trailer towing 263

Driving the vehicle

The following procedures should be observed to ensure safe driving:

■ Starting the engine

→P. 176, 186

■ Driving

Vehicles with a Multidrive

STEP 1 With the brake pedal depressed, shift the shift lever to D. (→P. 190)

STEP 2 Release the parking brake. (→P. 205)

STEP 3 Gradually release the brake pedal and gently depress the accelerator pedal to accelerate the vehicle.

Vehicles with a multi-mode manual transmission

STEP 1 With the brake pedal depressed, shift the shift lever to E or M. (→P. 196)

When shifting the shift lever to E: Make sure that the display of the gear position indicator shows E.
When shifting the shift lever to M: Make sure that the display of the gear position indicator shows 1.

STEP 2 Release the parking brake. (→P. 205)

STEP 3 Gradually release the brake pedal and gently depress the accelerator pedal to accelerate the vehicle.

Vehicles with a manual transmission

STEP 1 While depressing the clutch pedal, shift the shift lever to 1. (→P. 201)

STEP 2 Release the parking brake. (→P. 205)

STEP 3 Gradually release the clutch pedal. At the same time, gently depress the accelerator pedal to accelerate the vehicle.

■ Stopping

Vehicles with a Multidrive

STEP 1 With the shift lever in D, depress the brake pedal.

Vehicles with a Stop & Start system: If the Stop & Start system is enabled, depressing the brake pedal will stop the engine. (→P. 238)

STEP 2 If necessary, set the parking brake.

If the vehicle is to be stopped for an extended period of time, shift the shift lever to P or N. (→P. 190)

Vehicles with a multi-mode manual transmission

STEP 1 With the shift lever in E or M, depress the brake pedal.

STEP 2 If necessary, set the parking brake.

If the vehicle is to be stopped for an extended period of time, shift the shift lever to N. (→P. 196)

Vehicles with a manual transmission

STEP 1 While depressing the clutch pedal, depress the brake pedal.

STEP 2 If necessary, set the parking brake.

If the vehicle is to be stopped for an extended period of time, shift the shift lever to N. (→P. 201)

Vehicles with a Stop & Start system: If the Stop & Start system is enabled, shifting the shift lever to N and releasing the clutch pedal will stop the engine. (→P. 238)

■ **Parking the vehicle**

Vehicles with a Multidrive

STEP 1 With the shift lever in D, depress the brake pedal.

STEP 2 Set the parking brake. (→P. 205)

STEP 3 Shift the shift lever to P. (→P. 190)

If parking on a hill, block the wheels as needed.

STEP 4 Vehicles without a smart entry & start system:
Turn the engine switch to the “LOCK” position to stop the engine.

Vehicles with a smart entry & start system:
Press the “ENGINE START STOP” switch to stop the engine.

STEP 5 Lock the door, making sure that you have the key on your person.

Vehicles with a multi-mode manual transmission

STEP 1 With the shift lever in E or M, depress the brake pedal.

STEP 2 Set the parking brake. (→P. 205)

STEP 3 Shift the shift lever to E, M or R. (→P. 196)

If parking on a hill, block the wheels as needed.

STEP 4 Vehicles without a smart entry & start system: Turn the engine switch to the “LOCK” position to stop the engine.

Vehicles with a smart entry & start system: Press the “ENGINE START STOP” switch to stop the engine.

Make sure that the display of the gear position indicator shows 1 or R.

STEP 5 Lock the door, making sure that you have the key on your person.

Vehicles with a manual transmission

STEP 1 While depressing the clutch pedal, depress the brake pedal.

STEP 2 Set the parking brake. (→P. 205)

STEP 3 Shift the shift lever to N. (→P. 201)

If parking on a hill, shift the shift lever to 1 or R and block the wheels as needed.

STEP 4 Vehicles without a smart entry & start system: Turn the engine switch to the “LOCK” position to stop the engine.

Vehicles with a smart entry & start system: Press the “ENGINE START STOP” switch to stop the engine.

STEP 5 Lock the door, making sure that you have the key on your person.

Starting off on a steep uphill

Vehicles with a Multidrive

STEP 1 Make sure that the parking brake is set and shift the shift lever to D.

STEP 2 Gently depress the accelerator pedal.

STEP 3 Release the parking brake.

Vehicles with a multi-mode manual transmission

STEP 1 With the brake pedal depressed, firmly set the parking brake and shift the shift lever to E or M.

Make sure that the display of the gear position indicator shows 1.

STEP 2 Gently depress the accelerator pedal.

STEP 3 Release the parking brake.

Vehicles with a manual transmission

STEP 1 With the parking brake firmly set and the clutch pedal fully depressed, shift the shift lever to 1.

STEP 2 Lightly depress the accelerator pedal at the same time as gradually releasing the clutch pedal.

STEP 3 Release the parking brake.

■ Driving in the rain

- Drive carefully when it is raining, because visibility will be reduced, the windows may become fogged-up, and the road will be slippery.
- Drive carefully when it starts to rain, because the road surface will be especially slippery.
- Refrain from high speeds when driving on an expressway in the rain, because there may be a layer of water between the tires and the road surface, preventing the steering and brakes from operating properly.

Engine speed while driving (vehicles with a Multidrive)

In the following conditions, the engine speed may become high while driving. This is due to automatic up-shifting control or down-shifting implementation to meet driving conditions. It does not indicate sudden acceleration.

- The vehicle is judged to be driving uphill or downhill
- When the accelerator pedal is released
- When the brake pedal is depressed while the SPORT mode is selected

Breaking in your new Toyota

To extend the life of the vehicle, observing the following precautions is recommended:

- For the first 300 km (186 miles):
  Avoid sudden stops.
- For the first 800 km (500 miles):
  Do not tow a trailer.
- For the first 1000 km (621 miles):
  - Do not drive at extremely high speeds.
  - Avoid sudden acceleration.
  - Do not drive continuously in low gears.
  - Do not drive at a constant speed for extended periods.

Idling time before stopping the engine (diesel engine)

To prevent damage to the turbocharger, allow the engine to idle immediately after high-speed driving or driving up a hill.

Driving condition		Idling time
Normal city driving		Not necessary
High-speed driving	Constant speed of approx. 80 km/h (50 mph)	Approximately 20 seconds
	Constant speed of approx. 100 km/h (63 mph)	Approximately 1 minute
Steep hill driving or continuous driving at 100 km/h (63 mph) or more (race track driving etc.)		Approximately 2 minutes

Eco-friendly driving (vehicles with a Multidrive)



Eco Driving Indicator Light lets the driver know whether the vehicle is driven Eco-friendly using the indicator. If the acceleration exceeds the zone of Eco Driving, the indicator may be turned off.

Eco Driving Indicator Light will not operate in the following conditions:

- The shift lever is anything other than D.
- The paddle shift switch is used.
- The vehicle speed is approximately 130 km/h (81 mph) or higher.
- The driving mode is set to SPORT mode.

Eco Driving Indicator Light can be activated or deactivated. (→P. 210)

Operating your vehicle in a foreign country

Comply with the relevant vehicle registration laws and confirm the availability of the correct fuel. (→P. 522)

CAUTION

When starting the vehicle

Vehicles with a Multidrive, always keep your foot on the brake pedal while stopped with the engine running. This prevents the vehicle from creeping.

Vehicles with a multi-mode manual transmission, always keep your foot on the brake pedal while stopped with the engine running. This prevents the vehicle from moving unexpectedly.

CAUTION

When driving the vehicle

- Do not drive if you are unfamiliar with the location of the brake and accelerator pedals to avoid depressing the wrong pedal.
  - Accidentally depressing the accelerator pedal instead of the brake pedal will result in sudden acceleration that may lead to an accident that could result in death or serious injury.
  - When backing up, you may twist your body around, leading to a difficulty in operating the pedals. Make sure to operate the pedals properly.
  - Make sure to keep a correct driving posture even when moving the vehicle only slightly. This allows you to depress the brake and accelerator pedals properly.
  - Depress the brake pedal using your right foot. Depressing the brake pedal using your left foot may delay response in an emergency, resulting in an accident.
- Do not drive the vehicle over or stop the vehicle near flammable materials. The exhaust system and exhaust gases can be extremely hot. These hot parts may cause a fire if there is any flammable material nearby.
- Except vehicles with a manual transmission: Do not let the vehicle roll backward while the shift lever is in a driving position, or roll forward while the shift lever is in R.
  Doing so may cause the engine to stall or lead to poor brake and steering performance, resulting in an accident or damage to the vehicle.
- If the smell of exhaust is noticed inside the vehicle, open the windows and check that the back door is closed. Large amounts of exhaust in the vehicle can cause driver drowsiness and an accident, resulting in death or a serious health hazard. Have the vehicle inspected immediately by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.
- On vehicles with a Multidrive, do not shift the shift lever to P while the vehicle is moving.
  Doing so can damage the transmission and may result in a loss of vehicle control.
- Do not shift the shift lever to R while the vehicle is moving forward.
  Doing so can damage the transmission and may result in a loss of vehicle control.

CAUTION

- Do not shift the shift lever to D (vehicles with a Multidrive), E, M (vehicles with a multi-mode manual transmission) or 1 (vehicles with a manual transmission) while the vehicle is moving backward.
  Doing so can damage the transmission and may result in a loss of vehicle control.
- Moving the shift lever to N while the vehicle is moving will disengage the engine from the transmission. Engine braking is not available when N is selected.
- During normal driving, do not turn off the engine. Turning the engine off while driving will not cause loss of steering or braking control, but the power assist to these systems will be lost. This will make it more difficult to steer and brake, so you should pull over and stop the vehicle as soon as it is safe to do so.
  However, in the event of an emergency, such as if it becomes impossible to stop the vehicle in the normal way: →P. 514
- Use engine braking (downshift) to maintain a safe speed when driving down a steep hill.
  Using the brakes continuously may cause the brakes to overheat and lose effectiveness. (→P. 191, 196)
- When stopped on an inclined surface, use the brake pedal and parking brake to prevent the vehicle from rolling backward or forward and causing an accident.
- Do not adjust the positions of the steering wheel, the seat, or the inside or outside rear view mirrors while driving.
  Doing so may result in a loss of vehicle control that can cause accidents, resulting in death or serious injury.
- Always check that all passengers' arms, heads or other parts of their body are not outside the vehicle, as this may result in death or serious injury.

■ When driving on slippery road surfaces

- Sudden braking, acceleration and steering may cause tire slippage and reduce your ability to control the vehicle, resulting in an accident.
- Sudden changes in engine speed, such as engine braking caused by up-shifting and down-shifting, may cause the vehicle to skid, resulting in an accident.

CAUTION

- After driving through a puddle, lightly depress the brake pedal to make sure that the brakes are functioning properly. Wet brake pads may prevent the brakes from functioning properly. If the brakes on only one side are wet and not functioning properly, steering control may be affected, resulting in an accident.

When shifting the shift lever (except vehicles with a manual transmission)

Be careful not to shift the shift lever with the accelerator pedal depressed. Shifting the shift lever to a gear other than P (vehicles with a Multidrive only) or N may lead to unexpected rapid acceleration of the vehicle that may cause an accident and result in death or serious injury.

If you hear a squealing or scraping noise (brake pad wear indicators)

Have the brake pads checked and replaced by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional as soon as possible.
Rotor damage may result if the pads are not replaced when needed.

It is dangerous to drive the vehicle when the wear limits of the brake pads and/or those of the brake discs are exceeded.

When the vehicle is stopped

- Do not race the engine.
  If the vehicle is in any gear other than P (vehicles with a Multidrive only) or N, the vehicle may accelerate suddenly and unexpectedly, causing an accident.
- Do not leave the vehicle with the engine running for a long time.
  If such a situation cannot be avoided, park the vehicle in an open space and check that exhaust fumes do not enter the vehicle interior.
- Except vehicles with a manual transmission: In order to prevent accidents due to the vehicle rolling away, always keep depressing the brake pedal while the engine is running, and apply the parking brake as necessary.
- If the vehicle is stopped on an incline, in order to prevent accidents caused by the vehicle rolling forward or backward, always depress the brake pedal and securely apply the parking brake as needed.

CAUTION

- Avoid revving or racing the engine.
  Running the engine at high speed while the vehicle is stopped may cause the exhaust system to overheat, which could result in a fire if combustible material is nearby.

When the vehicle is parked

- Do not leave glasses, cigarette lighters, spray cans, or soft drink cans in the vehicle when it is in the sun.
  Doing so may result in the following:
  - Gas may leak from a cigarette lighter or spray can, and may lead to a fire.
  - The temperature inside the vehicle may cause the plastic lenses and plastic material of glasses to deform or crack.
  - Soft drink cans may fracture, causing the contents to spray over the interior of the vehicle, and may also cause a short circuit in the vehicle's electrical components.
- Do not leave cigarette lighters in the vehicle. If a cigarette lighter is in a place such as the glove box or on the floor, it may be lit accidentally when luggage is loaded or the seat is adjusted, causing a fire.
- Do not attach adhesive discs to the windshield or windows. Do not place containers such as air fresheners on the instrument panel or dashboard. Adhesive discs or containers may act as lenses, causing a fire in the vehicle.
- Do not leave a door or window open if the curved glass is coated with a metallized film such as a silver-colored one. Reflected sunlight may cause the glass to act as a lens, causing a fire.
- Vehicles with a Multidrive: Always apply the parking brake, shift the shift lever to P, stop the engine and lock the vehicle.
  Do not leave the vehicle unattended while the engine is running.
- Vehicles with a multi-mode manual transmission: Always apply the parking brake, shift the shift lever to E, M or R, stop the engine and lock the vehicle.
  Do not leave the vehicle unattended while the engine is running.

CAUTION

- Do not touch the exhaust pipes while the engine is running or immediately after turning the engine off.
  Doing so may cause burns.
- Do not leave the engine running in an area with snow build-up, or where it is snowing. If snowbanks build up around the vehicle while the engine is running, exhaust gases may collect and enter the vehicle. This may lead to death or a serious health hazard.
- Vehicles with a multi-mode manual transmission: Do not turn off the engine until 1st or reverse is engaged properly and completely. Confirm that the gear is engaged by viewing the gear position indicator.
  Parking the vehicle without a gear engaged may cause the vehicle to move result in an accident.

■ Exhaust gases

Exhaust gases include harmful carbon monoxide (CO), which is colorless and odorless. Inhaling exhaust gases may lead to death or a serious health hazard.

- If the vehicle is in a poorly ventilated area, stop the engine. In a closed area, such as a garage, exhaust gases may collect and enter the vehicle. This may lead to death or a serious health hazard.
- The exhaust system should be checked occasionally. If there is a hole or crack caused by corrosion, damage to a joint or abnormal exhaust noise, be sure to have the vehicle inspected and repaired by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional. Failure to do so may allow exhaust gases to enter the vehicle, resulting in death or a serious health hazard.

■ When taking a nap in the vehicle

Always turn the engine off. Otherwise, if you accidentally move the shift lever or depress the accelerator pedal, this could cause an accident or fire due to engine overheating. Additionally, if the vehicle is parked in a poorly ventilated area, exhaust gases may collect and enter the vehicle, leading to death or a serious health hazard.

CAUTION

When braking

- When the brakes are wet, drive more cautiously.
  Braking distance increases when the brakes are wet, and this may cause one side of the vehicle to brake differently than the other side. Also, the parking brake may not securely hold the vehicle.
- If the power brake assist function does not operate, do not follow other vehicles closely and avoid hills or sharp turns that require braking.
  In this case, braking is still possible, but the brake pedal should be depressed more firmly than usual. Also, the braking distance will increase. Have your brakes fixed immediately.
- Do not pump the brake pedal if the engine stalls.
  Each push on the brake pedal uses up the reserve for the power-assisted brakes.
- The brake system consists of 2 individual hydraulic systems; if one of the systems fails, the other will still operate. In this case, the brake pedal should be depressed more firmly than usual and the braking distance will increase. Have your brakes fixed immediately.

NOTICE

■ **When driving the vehicle**

Vehicles with a Multidrive

- Do not depress the accelerator and brake pedals at the same time during driving, as this may restrain driving torque.
- Do not use the accelerator pedal or depress the accelerator and brake pedals at the same time to hold the vehicle on a hill.

Vehicles with a multi-mode manual transmission

- Do not depress the accelerator and brake pedals at the same time during driving, as this may restrain driving torque.
- Do not use the accelerator pedal or starting assist system to hold the vehicle on a hill.
  Doing so may damage the clutch.

Vehicles with a manual transmission

- Do not depress the accelerator and brake pedals at the same time during driving, as this may restrain driving torque.
- Do not shift gears unless the clutch pedal is fully depressed. After shifting, do not release the clutch pedal abruptly. Doing so may damage the clutch, transmission and gears.
- Observe the following to prevent the clutch from being damaged.
  - Do not rest your foot on the clutch pedal while driving.
    Doing so may cause clutch trouble.
  - Do not use any gear other than the 1st gear when starting off and moving forward.
    Doing so may damage the clutch.
  - Do not use the clutch to hold the vehicle when stopping on an uphill grade.
    Doing so may damage the clutch.
- Do not shift the shift lever to R when the vehicle is still moving. Doing so may damage the clutch, transmission and gears.

NOTICE

When parking the vehicle (vehicles with a Multidrive)

Always shift the shift lever to P. Failure to do so may cause the vehicle to move or the vehicle may accelerate suddenly if the accelerator pedal is accidentally depressed.

Avoiding damage to vehicle parts

- Do not turn the steering wheel fully in either direction and hold it there for an extended period of time.
  Doing so may damage the power steering motor.
- When driving over bumps in the road, drive as slowly as possible to avoid damaging the wheels, underside of the vehicle, etc.
- Diesel engine only: Make sure to idle the engine immediately after high-speed driving or hill climbing. Stop the engine only after the turbocharger has cooled down.
  Failure to do so may cause damage to the turbocharger.

If you get a flat tire while driving

A flat or damaged tire may cause the following situations. Hold the steering wheel firmly and gradually depress the brake pedal to slow down the vehicle.

- It may be difficult to control your vehicle.
- The vehicle will make abnormal sounds or vibrations.
- The vehicle will lean abnormally.

Information on what to do in case of a flat tire (→P. 456, 469)

NOTICE

When encountering flooded roads

Do not drive on a road that has flooded after heavy rain etc. Doing so may cause the following serious damage to the vehicle:

- Engine stalling
- Short in electrical components
- Engine damage caused by water immersion

In the event that you drive on a flooded road and the vehicle is flooded, be sure to have any authorized Toyota dealer or repairer, or another duly qualified and equipped professional check the following:

- Brake function
- Changes in quantity and quality of engine oil, transaxle fluid, etc.
- Lubricant condition for the bearings and suspension joints (where possible), and the function of all joints, bearings, etc.

Performing the following operations when carrying the electronic key on your person starts the engine or changes "ENGINE START STOP" switch modes.

■ Starting the engine

Vehicles with a Multidrive

STEP 1 Check that the parking brake is set.

STEP 2 Check that the shift lever is set in P.

If the shift lever is not set in P, the engine may not be started. (→P. 190)

STEP 3 Firmly depress the brake pedal.

The smart entry & start system indicator light (green) will turn on. If the indicator light does not turn on, the engine cannot be started.

STEP 4

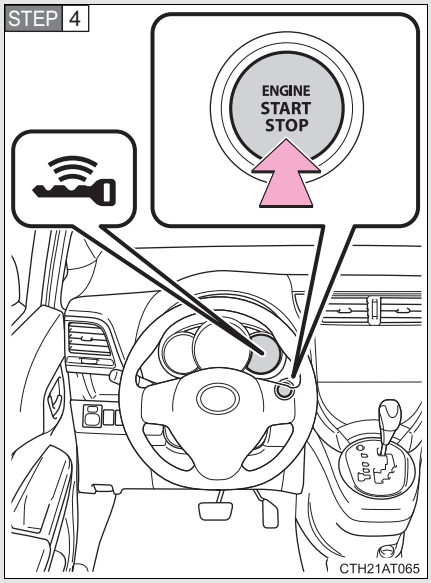

Press the "ENGINE START STOP" switch.

The engine will crank until it starts or for up to 30 seconds, whichever is less.

Continue depressing the brake pedal until the engine is completely started.

The engine can be started from any "ENGINE START STOP" switch mode.

Vehicles with a multi-mode manual transmission

STEP 1 Check that the parking brake is set.

STEP 2 Firmly depress the brake pedal, press the “ENGINE START STOP” switch once and shift the shift lever to N. (→P. 196)

The smart entry & start system indicator light (green) will turn on. If the indicator light does not turn on, the engine cannot be started.

STEP 3

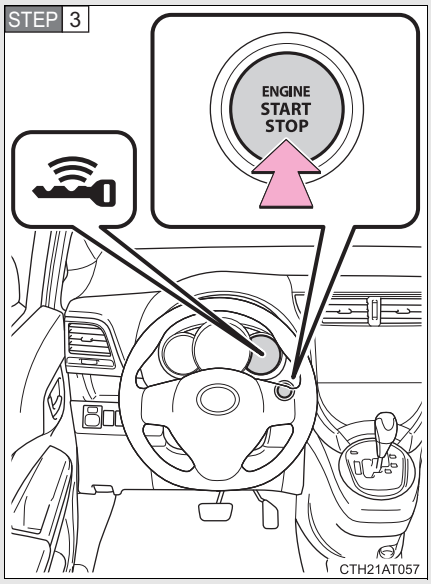

Press the “ENGINE START STOP” switch.

The engine will crank until it starts or for up to 30 seconds, whichever is less.

Continue depressing the brake pedal until the engine is completely started.

The indicator turns on. The engine will start after the indicator light goes out.

The engine can be started from any “ENGINE START STOP” switch mode.

Vehicles with a manual transmission

STEP 1 Check that the parking brake is set.

STEP 2 Check that the shift lever is set in N.

STEP 3 Firmly depress the clutch pedal.

The smart entry & start system indicator light (green) will turn on. If the indicator light does not turn on, the engine cannot be started.

STEP 4

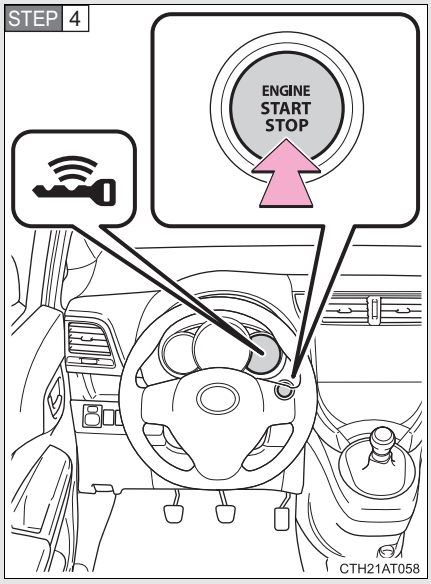

Press the “ENGINE START STOP” switch.

The engine will crank until it starts or for up to 30 seconds, whichever is less.

Continue depressing the clutch pedal until the engine is completely started.

Diesel engine only: The indicator turns on. The engine will start after the indicator light goes out.

The engine can be started from any “ENGINE START STOP” switch mode.

■ **Stopping the engine**

Vehicles with a Multidrive

STEP 1 Stop the vehicle.

STEP 2 Shift the shift lever to P.

STEP 3 Set the parking brake. (→P. 205)

STEP 4 Release the brake pedal.

STEP 5 Press the “ENGINE START STOP” switch.

STEP 6 Check that the smart entry & start system indicator light (green) is off.

Vehicles with a multi-mode manual transmission

STEP 1 Stop the vehicle.

STEP 2 Shift the shift lever to E, M or R.

STEP 3 Set the parking brake. (→P. 205)

STEP 4 Release the brake pedal.

STEP 5 Press the “ENGINE START STOP” switch.

STEP 6 Check that the smart entry & start system indicator light (green) is off.

Vehicles with a manual transmission

STEP 1 While depressing the clutch pedal, stop the vehicle.

STEP 2 Shift the shift lever to N.

STEP 3 Set the parking brake. (→P. 205)

STEP 4 Release the clutch pedal.

STEP 5 Press the “ENGINE START STOP” switch.

STEP 6 Check that the smart entry & start system indicator light (green) is off.

■ Changing “ENGINE START STOP” switch mode

Modes can be changed by pressing the “ENGINE START STOP” switch with the brake pedal (except vehicles with a manual transmission) or clutch pedal (vehicles with a manual transmission) released. (The mode changes each time the switch is pressed.)

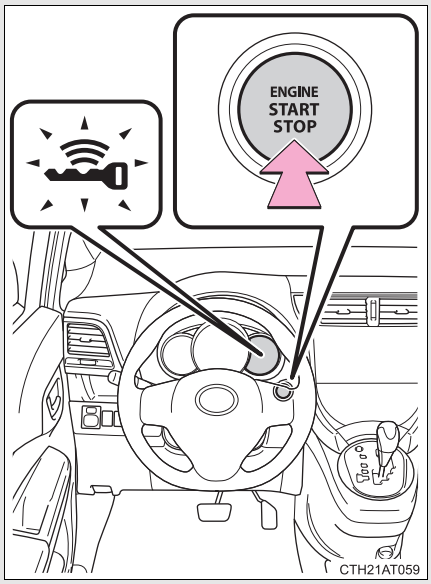

Off*

The emergency flashers can be used.

The smart entry & start system indicator light (green) is off.

ACCESSORY mode

Some electrical components such as the audio system can be used.

The smart entry & start system indicator light (green) flashes slowly.

IGNITION ON mode

All electrical components can be used.

The smart entry & start system indicator light (green) flashes slowly.

*: Vehicles with a Multidrive: If the shift lever is in a position other than P when turning off the engine, the “ENGINE START STOP” switch will be turned to ACCESSORY mode, not to off.

When stopping the engine with the shift lever in a position other than P (vehicles with a Multidrive)

If the engine is stopped with the shift lever in a position other than P, the “ENGINE START STOP” switch will not be turned off but instead be turned to ACCESSORY mode. Perform the following procedure to turn the switch off:

STEP 1 Check that the parking brake is set.

STEP 2 Shift the shift lever to P.

STEP 3 Check that the smart entry & start system indicator light (green) flashes slowly and then press the “ENGINE START STOP” switch once.

STEP 4 Check that the smart entry & start system indicator light (green) is off.

■ **Auto power off function**

Vehicles with a Multidrive

If the vehicle is left in ACCESSORY or IGNITION ON mode (the engine is not running) for more than an hour with the shift lever in P, the “ENGINE START STOP” switch will automatically turn off. However, this function cannot entirely prevent battery discharge. Do not leave the vehicle with the “ENGINE START STOP” switch in ACCESSORY or IGNITION ON mode for long periods of time when the engine is not running.

Vehicles with a multi-mode manual transmission and manual transmission

If the vehicle is left in ACCESSORY or IGNITION ON mode (the engine is not running) for more than an hour, the “ENGINE START STOP” switch will automatically turn off. However, this function cannot entirely prevent battery discharge. Do not leave the vehicle with the “ENGINE START STOP” switch in ACCESSORY or IGNITION ON mode for long periods of time when the engine is not running.

■ **Operation of the “ENGINE START STOP” switch**

When operating the “ENGINE START STOP” switch, one short, firm press is enough. If the switch is pressed improperly, the engine may not start or the “ENGINE START STOP” switch mode may not change. It is not necessary to press and hold the switch.

■ **Electronic key battery depletion**

→P. 44

■ **Conditions affecting operation**

→P. 41

■ **Notes for the entry function**

→P. 42

■ **If the engine does not start**

- The engine immobilizer system may not have been deactivated. (→P. 107)



- Vehicles with a Multidrive: Check that the shift lever is securely set in P. The engine may not start if the shift lever is displaced out of P. The smart entry & start system indicator light (green) will flash quickly.

■ **Steering lock**

After turning the “ENGINE START STOP” switch off and opening and closing the doors, the steering wheel will be locked due to the steering lock function. Operating the “ENGINE START STOP” switch again automatically cancels the steering lock.

■ **When the steering lock cannot be released**



The smart entry & start system indicator light (green) will flash quickly.

Vehicles with a Multidrive

Check that the shift lever is set in P. Press the “ENGINE START STOP” switch while turning the steering wheel left and right.

Vehicles with a multi-mode manual transmission and manual transmission

Press the “ENGINE START STOP” switch while turning the steering wheel left and right.

■ **Steering lock motor overheating prevention**

To prevent the steering lock motor from overheating, the motor may be suspended if the engine is turned on and off repeatedly in a short period of time. In this case, refrain from operating the engine. After about 10 seconds, the steering lock motor will resume functioning.

■ **When the smart entry & start system indicator light flashes in yellow**

The system may be malfunctioning. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.

■ **If the electronic key battery is depleted**

→P. 402

■ **If the smart entry & start system has been deactivated in a customized setting**

→P. 493

CAUTION

■ **When starting the engine**

Always start the engine while sitting in the driver's seat. Do not depress the accelerator pedal while starting the engine under any circumstances.
Doing so may cause an accident resulting in death or serious injury.

■ **Caution while driving**

If engine failure occurs while the vehicle is moving, do not lock or open the doors until the vehicle reaches a safe and complete stop. Activation of the steering lock in this circumstance may lead to an accident, resulting in death or serious injury.

■ **Stopping the engine in an emergency**

If you want to stop the engine in an emergency while driving the vehicle, press and hold the "ENGINE START STOP" switch for more than 3 seconds, or press it briefly 3 times or more in succession.
However, do not touch the "ENGINE START STOP" switch while driving except in an emergency. Turning the engine off while driving will not cause loss of steering or braking control, but the power assist to these systems will be lost. This will make it more difficult to steer and brake, so you should pull over and stop the vehicle as soon as it is safe to do so.

NOTICE

■ **To prevent battery discharge**

- Do not leave the “ENGINE START STOP” switch in ACCESSORY or IGNITION ON mode for long periods of time without the engine running.
- If the smart entry & start system indicator light (green) is illuminated, the “ENGINE START STOP” switch is not off. When exiting the vehicle, always check that the “ENGINE START STOP” switch is off.
- Vehicles with a Multidrive: Do not stop the engine when the shift lever is in a position other than P. If the engine is stopped in another shift lever position, the “ENGINE START STOP” switch will not be turned off but instead be turned to ACCESSORY mode. If the vehicle is left in ACCESSORY mode, battery discharge may occur.

■ **When starting the engine**

- Do not race a cold engine.
- If the engine becomes difficult to start or stalls frequently, have the engine checked immediately.

■ **Symptoms indicating a malfunction with the “ENGINE START STOP” switch**

If the “ENGINE START STOP” seems to be operating somewhat differently than usual, such as the switch sticking slightly, there may be a malfunction. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.

■ **Starting the engine**

Vehicles with a Multidrive

STEP 1 Check that the parking brake is set.

STEP 2 Check that the shift lever is set in P.

STEP 3 Firmly depress the brake pedal.

STEP 4 Turn the engine switch to the “START” position to start the engine.

Vehicles with a multi-mode manual transmission

STEP 1 Check that the parking brake is set.

STEP 2 Firmly depress the brake pedal, turn the engine switch to “ON” position and shift the shift lever to N. (→P. 196)

The indicator turns on.

STEP 3 After the indicator light goes out, turn the engine switch to the “START” position to start the engine.

Vehicles with a manual transmission (gasoline engine)

STEP 1 Check that the parking brake is set.

STEP 2 Check that the shift lever is set in N.

STEP 3 Firmly depress the clutch pedal.

STEP 4 Turn the engine switch to the “START” position to start the engine.

Vehicles with a manual transmission (diesel engine)

STEP 1 Check that the parking brake is set.

STEP 2 Check that the shift lever is set in N.

STEP 3 Firmly depress the clutch pedal.

STEP 4 Turn the engine switch to the “ON” position.

The indicator turns on.

STEP 5 After the indicator light goes out, turn the engine switch to the “START” position to start the engine.

Changing the engine switch positions

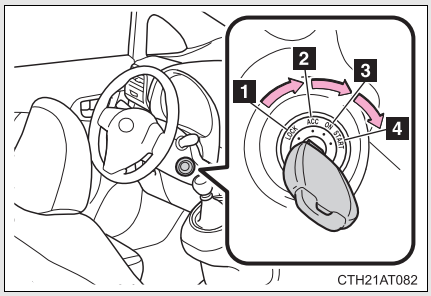

1 “LOCK”

The steering wheel is locked and the key can be removed. (Vehicles with a Multidrive: The key can be removed only when the shift lever is in P.)

2 “ACC”

Some electrical components such as the audio system can be used.

3 “ON”

All electrical components can be used.

4 “START”

For starting the engine.

■ **Turning the key from “ACC” to “LOCK”**

STEP 1 Vehicles with a Multidrive: Shift the shift lever to P. (→P. 190)
Vehicles with a multi-mode manual transmission: Shift the shift lever to E, M or R. (→P. 196)
Vehicles with a manual transmission: Shift the shift lever to N. (→P. 201)

STEP 2



Push in the key and turn it to the “LOCK” position.

■ **If the engine does not start**

The engine immobilizer system may not have been deactivated. (→P. 107)

■ **When the steering lock cannot be released**



When starting the engine, the engine switch may seem stuck in the “LOCK” position. To free it, turn the key while turning the steering wheel slightly left and right.

■ **Key reminder function**

A buzzer sounds if the driver’s door is opened while the engine switch is in the “LOCK” or “ACC” position to remind you to remove the key.

CAUTION

When starting the engine

Always start the engine while sitting in the driver's seat. Do not depress the accelerator pedal while starting the engine under any circumstances.
Doing so may cause an accident resulting in death or serious injury.

Caution when driving

Do not turn the engine switch to the "LOCK" position while driving. If, in an emergency, you must turn the engine off while the vehicle is moving, turn the engine switch only to the "ACC" position to stop the engine. An accident may result if the engine is stopped while driving.

NOTICE

To prevent battery discharge

Do not leave the engine switch in the "ACC" or "ON" position for long periods of time without the engine running.

When starting the engine

- Do not crank the engine for more than 30 seconds at a time. This may overheat the starter and wiring system.
- Do not race a cold engine.
- If the engine becomes difficult to start or stalls frequently, have the engine checked immediately.

Multidrive*

Select a shift position appropriate for the driving conditions.

■ Shifting the shift lever

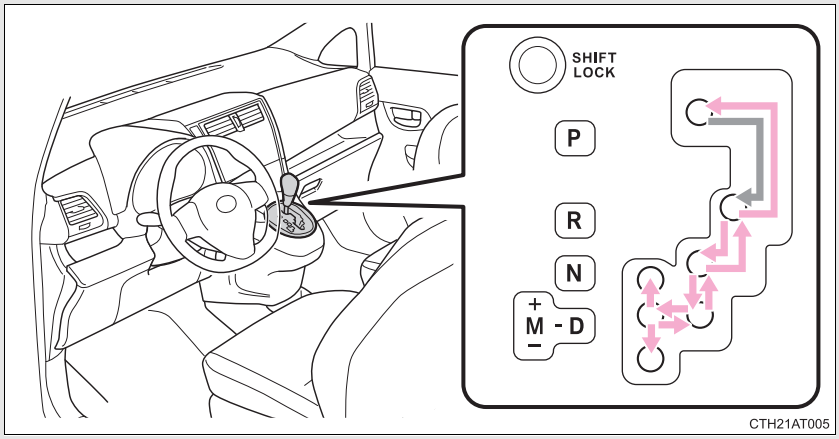

Vehicles without a smart entry & start system

While the engine switch is in the “ON” position, move the shift lever with the brake pedal depressed.

When shifting the shift lever between P and D, make sure that the vehicle is completely stopped.

Vehicles with a smart entry & start system

While the “ENGINE START STOP” switch is in IGNITION ON mode, move the shift lever with the brake pedal depressed.

When shifting the shift lever between P and D, make sure that the vehicle is completely stopped.

*: If equipped

Shift position purpose

Shift position	Function
P	Parking the vehicle/starting the engine
R	Reversing
N	Neutral
D	Normal driving*1
M	7-speed sport sequential shiftmatic mode driving*2 (→P. 192)

*1: To improve fuel consumption and reduce noises, set the shift lever in the D position for normal driving.

*2: Selecting gear step using the M position achieves suitable engine braking forces by operating shift lever.

Selecting a driving mode

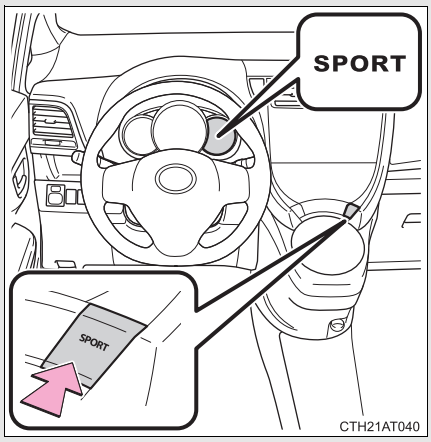

Press the switch.

For powerful acceleration and driving in mountainous regions.

Press the switch once more to return the normal mode.

Changing gear steps in 7-speed sport sequential shiftmatic mode

Shift the shift lever to the M position and operate the shift lever or paddle shift switch.

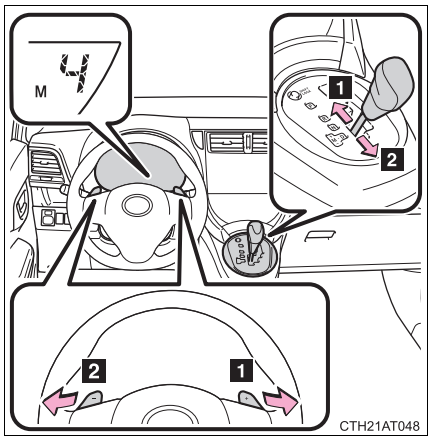

1 Upshifting

2 Downshifting

The gear step changes once every time the shift lever or paddle shift switch is operated.

The selected gear step, from 1 to 7, will be displayed in the instrument cluster.

However, even when in the M position, the gear steps will be automatically changed if the engine speed is too high, or too low.

Gear step functions

- You can choose from 7 levels of engine braking force.
- A lower gear step will provide greater engine braking force than a higher gear step, and the engine speed will also increase.

Temporary gear steps selection mode in the D position

To drive in temporary gear steps selection mode, operate the “-” and “+” paddle shift switch. The gear steps can then be selected by operating the “-” and “+” paddle shift switches. By selecting gear step using paddle shift switches, you can control engine braking forces.

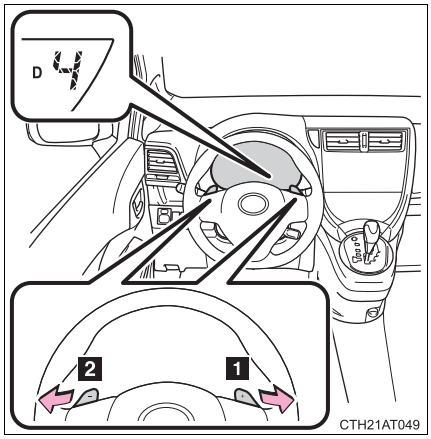

1 Upshifting

2 Downshifting

The gear step changes once every time the paddle shift switch is operated.

The selected gear step, from 1 to 7, will be displayed in the instrument cluster.

Gear step functions

→P. 192

■ **If the shift lever cannot be shifted from P**

→P. 489, 490

■ **When driving with the cruise control system (if equipped)**

- Engine braking will not occur in M position even when downshifting to M6, 5 or 4.
- Engine braking will not occur in D position even when the paddle shift switch is used for downshifting to D6, 5 or 4.

■ **If the "M" indicator flashes or a buzzer beeps after shifting the shift lever to M**

This may indicate a malfunction in the Multidrive system. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.
(In this situation, the transmission will operate in the same manner as when the shift lever is in D.)

■ **When the vehicle comes to a stop with the shift lever in the M position**

- The transmission will automatically downshift to M1 once the vehicle is stopped.
- After a stop, the vehicle will start off in M1.
- When the vehicle is stopped, the transmission is set at M1.

■ **Deactivation of the temporary gear steps selection mode in the D position**

In the following situations, temporary gear steps selection mode in the D position will be deactivated:

- When the vehicle comes to a stop
- If the accelerator pedal is depressed for more than a certain period of time in one gear step
- When the "+" paddle shift switch is held down for a period of time

■ **Downshift restriction warning buzzer (7-speed sport sequential shiftmatic mode)**

To help ensure safety and driving performance, downshifting operation may sometimes be restricted. In some circumstances, downshifting may not be possible even when the shift lever or paddle shift switches are operated. (A buzzer will sound twice.)

CAUTION

When driving on slippery road surfaces

Do not accelerate or shift gear steps suddenly.
Sudden changes in engine braking may cause the vehicle to spin or skid, resulting in an accident.

Multi-mode Manual Transmission*

Select a shift position appropriate for the driving conditions.

■ Shifting the shift lever

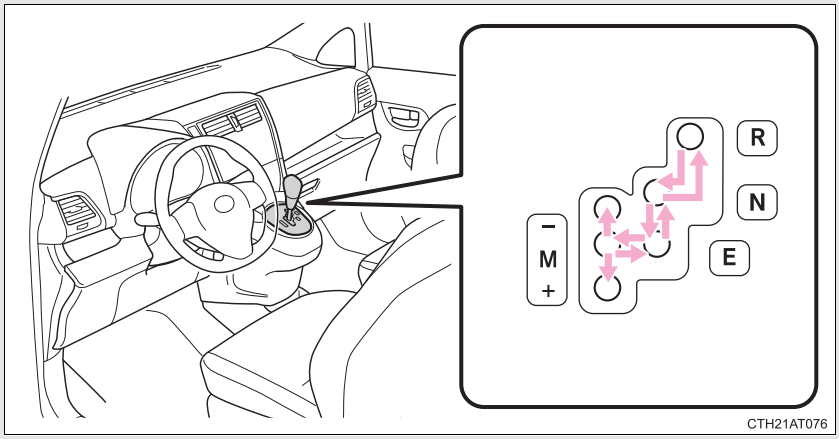

■ Shift position purpose

Shift position	Function
R	Reversing
N	Neutral or starting the engine
E	Easy (E) mode driving*1
M	Manual (M) mode driving*2 (→P. 197)

*1: The most appropriate gear is automatically selected upon an operation of the accelerator pedal and vehicle speed.

*2: A gear must be selected manually. However, the gear may automatically be changed down optimally according to vehicle speed.

*: If equipped

■ **Selecting Easy sports (Es) mode (when the shift lever is in E only)**

Es mode can be selected for superior driving performance and to achieve a feeling of faster acceleration than in E mode.

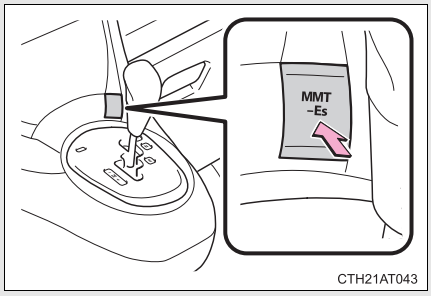

Turn Easy sports (Es) mode on/off

To improve fuel economy, cancel Es mode for ordinary driving.

Changing gears in M mode

When shift lever is in the M position, the shift lever or paddle shift switches can be operated as follows:

Shift lever

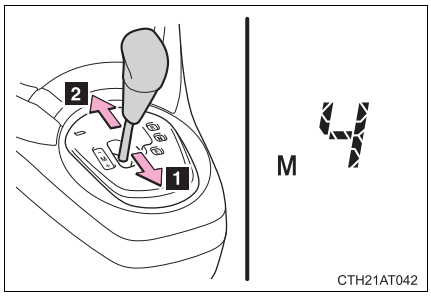

1 Upshifting

2 Downshifting

Shifting operation may be restricted depending on the vehicle speed.

Paddle shift switches

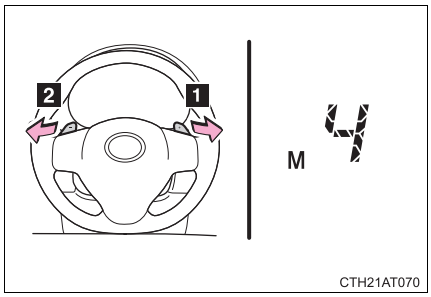

1 Upshifting

2 Downshifting

Shifting operation may be restricted depending on the vehicle speed.

Changing gears in E or Es mode

When the E or Es mode is selected, the paddle shift switches can be used as follows to select a gear temporarily.

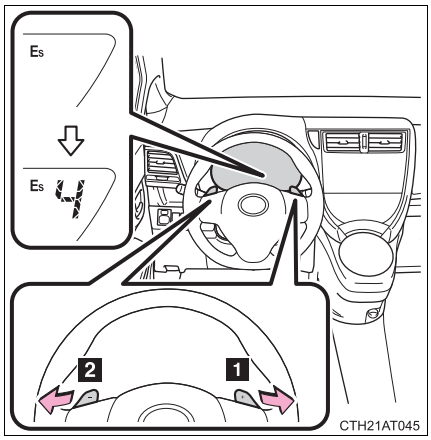

1 Upshifting

2 Downshifting

The gear will be displayed.

To return to E or Es mode, the “+” paddle shift switch must be held down for a period of time.

Shifting operation may be restricted depending on the vehicle speed.

■ **Maximum allowable speeds**

Observe the following maximum allowable speeds in each gear.

km/h (mph)

Gear	Maximum speed
1	42 (26)
2	79 (49)
3	116 (72)
4	156 (96)
5	—

■ **Es mode automatic deactivation**

Es mode is automatically deactivated if the “ENGINE START STOP” switch (vehicles with a smart entry & start system) or the engine switch (vehicles without a smart entry & start system) is turned off after driving in Es mode.

■ **If the shift lever cannot be shifted**

- With the shift lever in N
  Depress the brake pedal to shift the shift lever. If the shift lever cannot be shifted with your foot on the brake, there may be a problem with the shift lock system. (→P. 490)
- With the shift lever in a position other than N

  →P. 490

■ **If the driver's door is opened when the shift lever is in a position other than N and the engine is running**

A buzzer will sound. Close the driver's door.

■ **If the parking brake is set when the shift lever is in a position other than N with engine running**

- When the driver’s door is opened
  A buzzer will sound and the gear position will automatically change to N in 10 seconds.
- When the driver’s door is closed
  A buzzer will sound and the gear position will automatically change to N in 90 seconds.

■ **If the “M” indicator does not come on even after shifting the shift lever to M**

This may indicate a malfunction in the multi-mode manual transmission system. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.
(In this situation, the transmission will operate in the same manner as when the shift lever is in E.)

■ **If the “N” indicator is flashing**

- When shifting the shift lever
  Shift the shift lever to N. Wait a few seconds and shift the shift lever to the desired position.
- When the engine is turned off
  Vehicles without smart entry & start system: Turn the engine switch to the “ON” position. Depress the brake pedal and shift the shift lever to N, and then to the desired position.
  Vehicles with smart entry & start system: Turn the “ENGINE START STOP” switch to IGNITION ON mode. Depress the brake pedal and shift the shift lever to N, and then to the desired position.

If the indicator still flashes after the above operations, shift the shift lever to N and start the engine. Then, shift the shift lever to the desired position.

■ **If the “N” indicator is flashing and warning buzzer is beeping**

Shift the shift lever to N, and then to E, M or R.

■ **Reverse warning buzzer**

When shifting into R, a buzzer will sound to inform the driver that the shift lever is in R.

■ **Downshift restriction warning buzzer (in E mode [when the paddle shift switches are operated] or M mode)**

To help ensure safety and driving performance, downshifting operation may sometimes be restricted. In some circumstances, downshifting may not be possible even when the shift lever or paddle shift switches are operated. (A buzzer will sound twice.)

Manual Transmission*

■ Shifting the shift lever

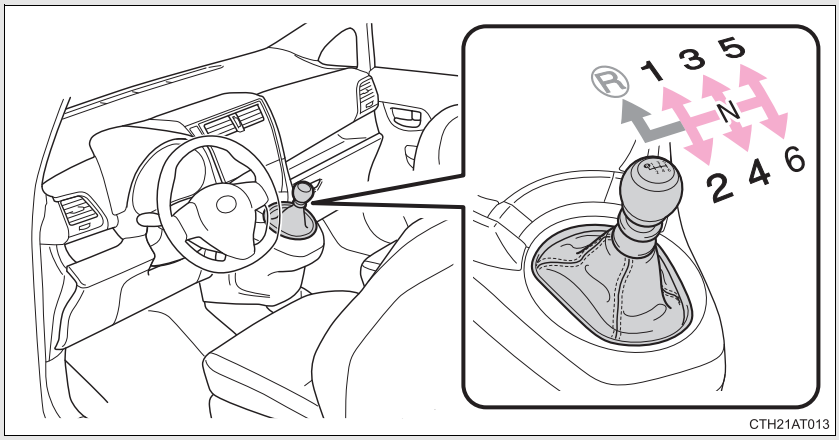

Fully depress the clutch pedal before operating the shift lever, and then release it slowly.

■ Shifting the shift lever to R

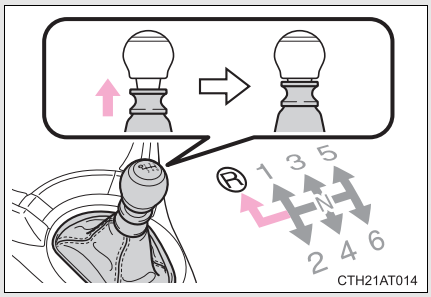

Shift the shift lever to R while lifting up the ring section.

*: If equipped

Gear Shift Indicator

The Gear Shift Indicator is a guide to help the driver achieve improved fuel economy and reduced exhaust emissions within limits of engine performance.

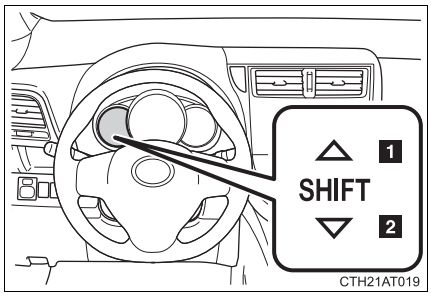

1 Upshifting
2 Downshifting

Gear Shift Indicator display

The Gear Shift Indicator may not be displayed when your foot is placed on the clutch pedal.

Maximum downshifting speed

Observe the downshifting speeds in the following table to prevent over-revving the engine.

km/h (mph)

Shift position	Maximum speed	
	1NR-FE engine	1ND-TV engine
1	42 (26)	44 (27)
2	78 (48)	83 (51)
3	114 (70)	122 (75)
4	145 (90)	164 (101)
5	170 (105)	—

CAUTION

■ **Gear Shift Indicator display**

Refer to the display while considering actual traffic and road conditions. Failure to exercise judgment may lead to an accident.

NOTICE

■ **To prevent damage to the transmission**

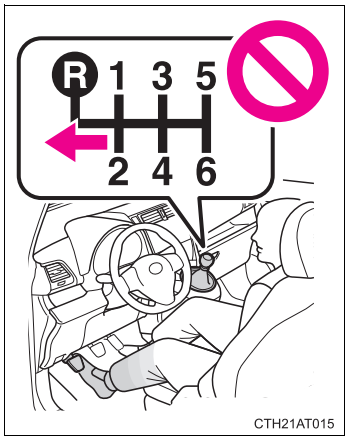

- Do not shift the shift lever to R without depressing the clutch pedal.

- Do not lift up the ring section except when shifting the lever to R.
- Shift the shift lever to R only when the vehicle is stationary with the clutch pedal fully depressed.

Turn signal lever

The turn signal lever can be used to show the following intentions of the driver:

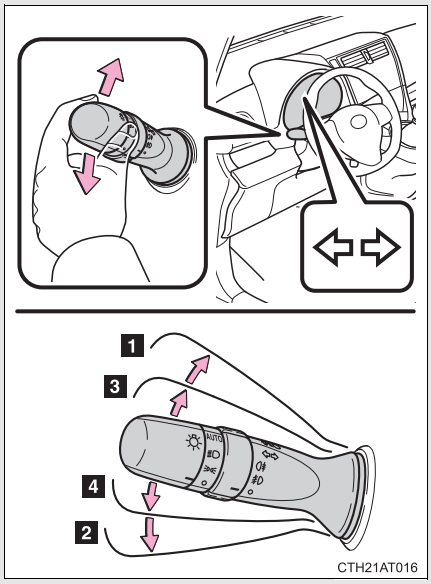

1 Right turn

2 Left turn

3 Lane change to the right (push and hold the lever partway)

The right hand signals will flash until you release the lever.

4 Lane change to the left (push and hold the lever partway)

The left hand signals will flash until you release the lever.

■ **Turn signals can be operated when**

Vehicles without a smart entry & start system: The engine switch is in the “ON” position.

Vehicles with a smart entry & start system: The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **If the indicator flashes faster than usual**

Check that a light bulb in the front or rear turn signal lights has not burned out.

Parking brake

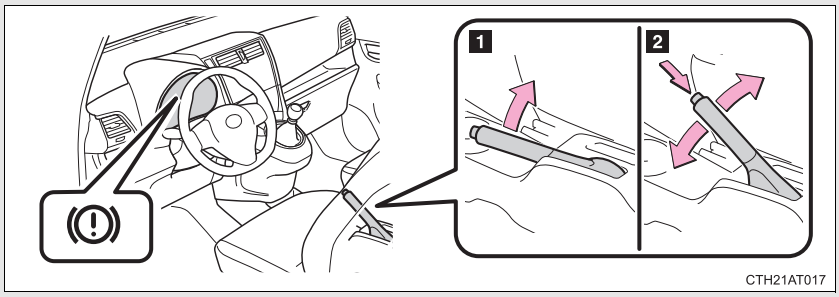

1 To set the parking brake, fully pull the parking brake lever while depressing the brake pedal.

2 To release the parking brake, slightly raise the lever and lower it completely while pressing the button.

Usage in winter time

See “Winter driving tips” for parking brake usage in winter time. (→P. 259)

NOTICE

Before driving

Fully release the parking brake.
Driving the vehicle with the parking brake set will lead to brake components overheating, which may affect braking performance and increase brake wear.

Horn

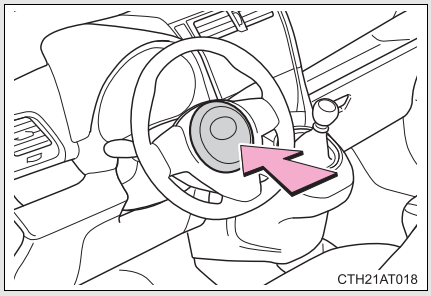

To sound the horn, press on or close to the mark.

■ **After adjusting the steering wheel**

Make sure that the steering wheel is securely locked.
The horn may not sound if the steering wheel is not securely locked.
(→P. 94)

Gauges and meters

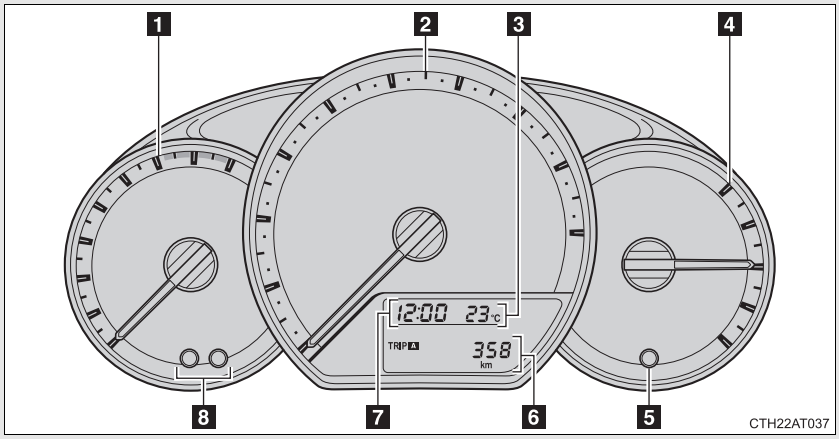

1 Tachometer

Displays the engine speed in revolutions per minute.

2 Speedometer

Displays the vehicle speed.

3 Outside temperature display

→P. 342

4 Fuel gauge

Displays the quantity of fuel remaining in the tank.

5 Display change button

→P. 208

6 Odometer, trip meter, Stop & Start system operation time, Stop & Start system total operation time, meter light control and multi-information display

→P. 208, 219

7 Clock

→P. 341

8 Clock adjusting buttons

→P. 341

Changing the display

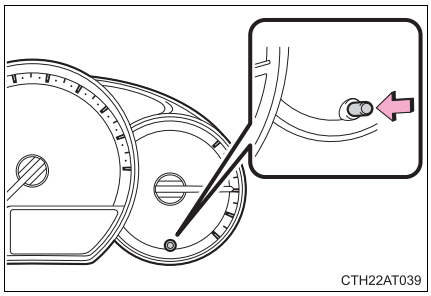

Items displayed can be switched by pressing the display change button.

Odometer

Displays the total distance the vehicle has been driven.

Trip meter

Displays the distance the vehicle has been driven since the meter was last reset. Trip meters A and B can be used to record and display different distances independently.

Pressing and holding the display change button will reset the trip meter that is currently displayed.

Stop & Start system operation time (if equipped)

Displays the total amount of time the Stop & Start system has operated (total engine stop time due to the Stop & Start system) from the engine switch being turned to “ON” until it is turned to “LOCK” (vehicles without smart entry & start system) or from the “ENGINE START STOP” switch being changed to IGNITION ON mode until it is changed to off (vehicles with a smart entry & start system).

■ **Stop & Start system total operation time (if equipped)**

Displays the total amount of time that the engine has been stopped due to operation of the Stop & Start system since the system was last reset.

Press and hold the button to reset.

■ **Instantaneous fuel consumption**

→P. 220

■ **Average fuel consumption**

→P. 221

■ **Driving range**

→P. 221

■ **Meter light control**

Displays the brightness of the meter light when the headlight switch is on.

Pressing and holding the button will adjust brightness of the meter light.

Customization display

Changing the Eco Driving Indicator Light status (vehicles with a Multidrive)

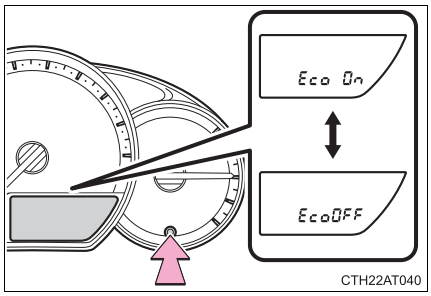

Eco Driving Indicator Light can be activated or deactivated by pressing the button when the Eco Driving Indicator Light customization display is displayed.

To display the Eco Driving Indicator Light customization display, display the odometer and press and hold the display change button for 5 seconds or more.

When customization is complete, press and hold the button for 2 seconds or more to return to the odometer display.

Changing mandatory displaying or hiding of the Stop & Start system operation time (vehicles with a Stop & Start system)

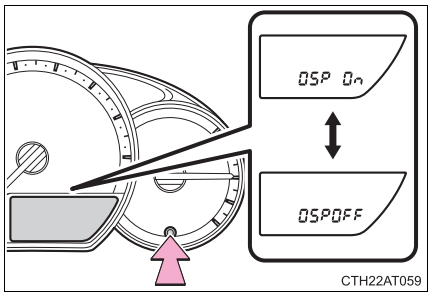

The Stop & Start system operation time display can be displayed mandatorily or hid by pressing the display change button while displaying the Stop & Start system operation time customizing display.

To display the Stop & Start system operation time customization display, display the Stop & Start system operation time and press and hold the display change button for 5 seconds or more. However, while the Stop & Start system operation time is being displayed mandatorily, the display will not change to the Stop & Start system operation time customization display.

When customization is complete, press and hold the button for 2 seconds or more to return to the Stop & Start system operation time display.

The meters and display operate when

Vehicles without a smart entry & start system:
The engine switch is in the “ON” position.

Vehicles with a smart entry & start system:
The “ENGINE START STOP” switch is in IGNITION ON mode.

NOTICE

■ **To prevent damage to the engine and its components**

- Do not let the indicator needle of the tachometer enter the red zone, which indicates the maximum engine speed.
- The engine may be overheating if the high engine coolant temperature warning light flashes or turns on. In this case, immediately stop the vehicle in a safe place, and check the engine after it has cooled completely. (→P. 505)

Indicators and warning lights

The indicators and warning lights on the instrument cluster, center panel and dashboard inform the driver of the status of the vehicle's various systems.

Instrument cluster

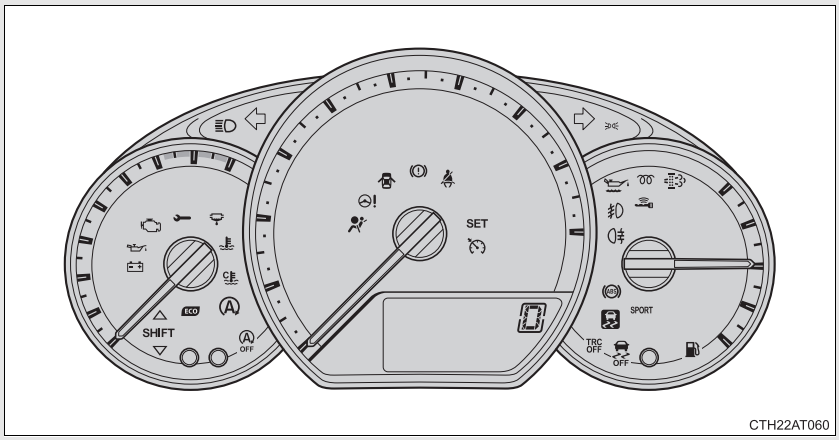

Center panel

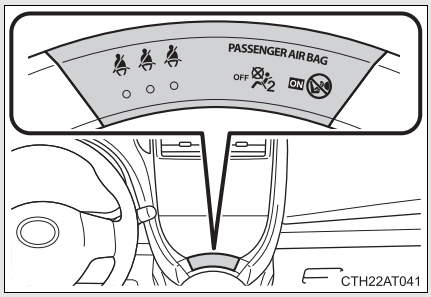

Dashboard

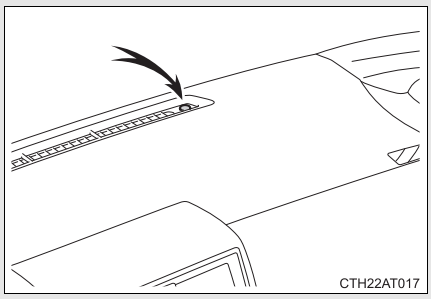

Indicators

The indicators inform the driver of the operating state of the vehicle's various systems.

Turn signal indicator (→P. 204)	*1 SHIFT (Vehicles with a manual transmission) — Gear Shift Indicator (→P. 202)
Headlight high beam indicator (→P. 223)	(Diesel engine) — Engine preheating indicator (→P. 176, 186)
(If equipped) — Tail light indicator (→P. 222)	(If equipped) — Cruise control indicator (→P. 245)
(If equipped) — Front fog light indicator (→P. 228)	(If equipped) — SET — Cruise control set indicator (→P. 245)
Rear fog light indicator (→P. 228)	*1 OFF — VSC OFF indicator (→P. 250)
(If equipped) — Smart entry & start system indicator (→P. 176)	*1 TRC OFF — "TRC OFF" indicator (→P. 250)
*1 (If equipped) — Stop & Start indicator (→P. 238)	SPORT (Vehicles with a Multidrive) — "SPORT" indicator (→P. 191)
Engine immobilizer/ alarm system indicator (→P. 107)	*1, 2 — Slip indicator (→P. 250)
*3 — Low engine coolant temperature indicator	

*1

(Vehicles with a Multidrive)

Eco Driving Indicator Light (→P. 166)

*1

(If equipped)

Stop & Start cancel indicator (→P. 238)

(Vehicles with a multi-mode manual transmission)

Shift position and gear position indicators (→P. 196)

(Vehicles with a Multidrive)

Shift position and gear step position indicators (→P. 190)

Airbag manual on-off indicator (→P. 135)

*1: These lights turn on when the “ENGINE START STOP” switch is turned to IGNITION ON mode (vehicles with a smart entry & start system) or the engine switch is turned to the “ON” position (vehicles without a smart entry & start system) to indicate that a system check is being performed. They will turn off after the engine is started, or after a few seconds. There may be a malfunction in a system if a light does not come on, or if the lights do not turn off. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

*2: The light flashes to indicate that the system is operating.

*3: This indicator turns on when the engine coolant temperature is low.

Warning lights

Warning lights inform the driver of malfunctions in any of the vehicle's systems. (→P. 443)

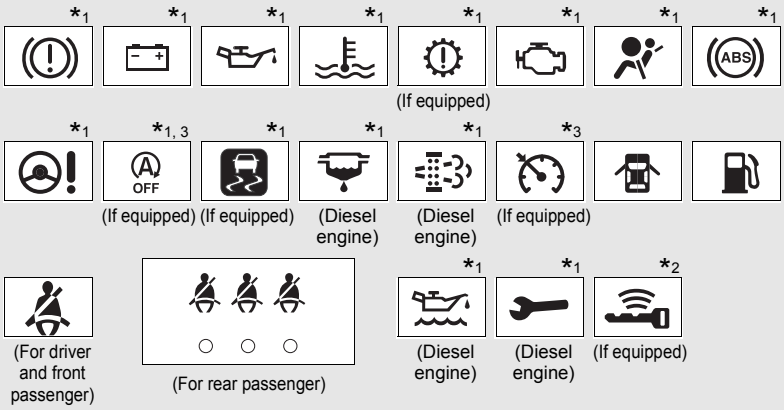

*1: These lights turn on when the "ENGINE START STOP" switch is turned to IGNITION ON mode (vehicles with a smart entry & start system) or the engine switch is turned to the "ON" position (vehicles without a smart entry & start system) to indicate that a system check is being performed. They will turn off after the engine is started, or after a few seconds. There may be a malfunction in a system if a light does not come on, or if the lights do not turn off. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

*2: The light flashes in yellow to indicate a malfunction. The light flashes quickly in green to indicate that the steering lock has not been released.

*3: The light flashes to indicate a malfunction.

CAUTION

If a safety system warning light does not come on

Should a safety system light such as the ABS and SRS warning light not come on when you start the engine, this could mean that these systems are not available to help protect you in an accident, which could result in death or serious injury. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately if this occurs.

Multi-information display

The multi-information display presents the driver with a variety of driving-related data.

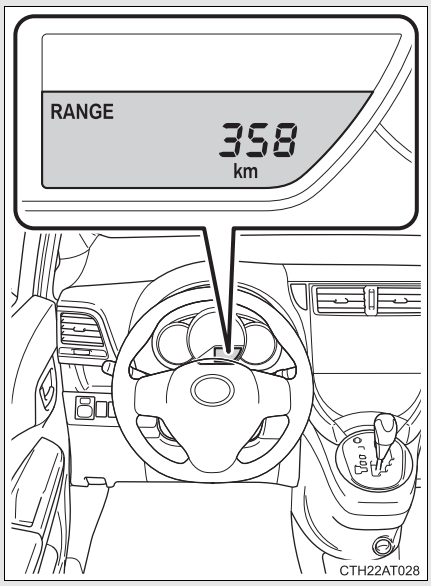

- Odometer (→P. 208)
- Trip meter (→P. 208)
- Stop & Start system operation time (if equipped) (→P. 208)
- Stop & Start system total operation time (if equipped) (→P. 209)
- Trip information (→P. 220)

  Displays driving range, fuel consumption and other cruising-related information.
- Meter light control(→P. 209)
- Eco Driving Indicator Light customization (if equipped) (→P. 210)

Changing the display

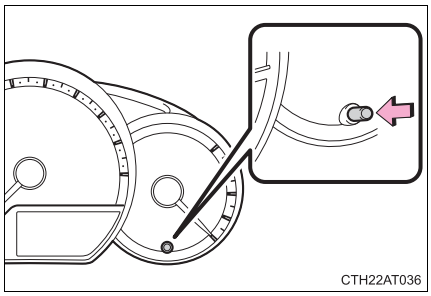

Items displayed can be switched by pressing the display change button.

Display items

■ **Odometer**

→P. 208

■ **Trip meter**

→P. 208

■ **Stop & Start system operation time (if equipped)**

→P. 208

■ **Stop & Start system total operation time (if equipped)**

→P. 209

■ **Instantaneous fuel consumption**



Displays instantaneous fuel consumption.

Average fuel consumption



Displays the average fuel consumption since the function was reset

- The function can be reset by pressing and holding the display change button when the average fuel consumption is displayed.
- Use the displayed average fuel consumption as a reference.

Driving range



Displays the estimated maximum distance that can be driven with the quantity of fuel remaining

- This distance is computed based on your average fuel consumption. As a result, the actual distance that can be driven may differ from that displayed.
- When only a small amount of fuel is added to the tank, the display may not be updated.

Meter light control

→P. 209

NOTICE

The multi-information display at low temperatures

Allow the interior of the vehicle to warm up before using the liquid crystal information display. At extremely low temperatures, the information display monitor may respond slowly, and display changes may be delayed.

Headlight switch

The headlights can be operated manually or automatically.

Turning the end of the lever turns on the lights as follows:

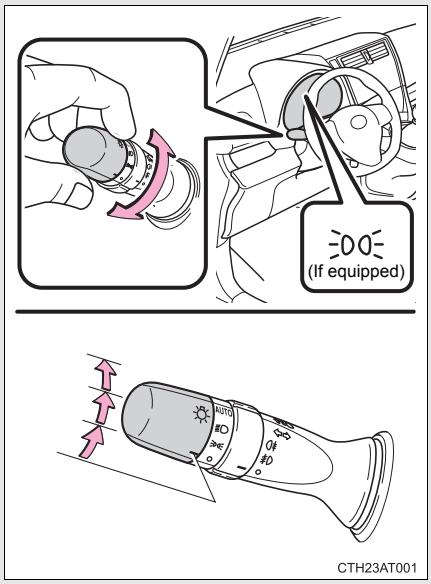

The front position, tail, license plate and instrument panel lights turn on.

The headlights and all the lights listed above turn on.

AUTO
(If equipped)

Vehicles without a smart entry & start system: The headlights, front position lights and so on turn on and off automatically
(when the engine switch is in the “ON” position.)

Vehicles with a smart entry & start system: The headlights, front position lights and so on turn on and off automatically (when the “ENGINE START STOP” switch is in IGNITION ON mode.)

Turning on the high beam headlights

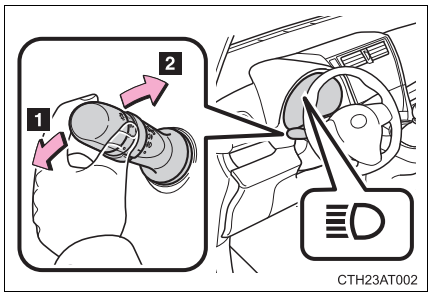

1 With the headlights on, push the lever away from you to turn on the high beams.

Pull the lever toward you to the center position to turn the high beams off.

2 Pull the lever toward you and release it to flash the high beams once.

You can flash the high beams with the headlights on or off.

Manual headlight leveling dial

The level of the headlights can be adjusted according to the number of passengers and the loading condition of the vehicle.

Left-hand drive vehicles

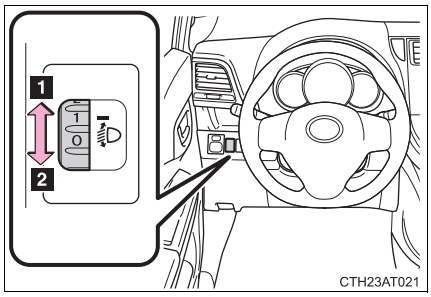

1 Raises the level of the headlights

2 Lowers the level of the headlights

Right-hand drive vehicles

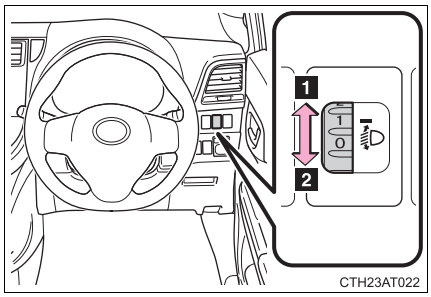

1 Raises the level of the headlights

2 Lowers the level of the headlights

Guide to dial settings

Occupancy and luggage load conditions		Dial position
Occupants	Luggage load	
Driver	None	0
Driver and front passenger	None	0
All seats occupied	None	1.5
All seats occupied	Full luggage loading	2.5
Driver	Full luggage loading	4.0

■ **Daytime running light system (if equipped)**

To make your vehicle more visible to other drivers, the headlights and tail lights turn on automatically whenever the engine is started. Daytime running lights are not designed for use at night.

■ **Headlight control sensor (if equipped)**



The sensor may not function properly if an object is placed on the sensor, or anything that blocks the sensor is affixed to the windshield.
Doing so interferes with the sensor detecting the level of ambient light and may cause the automatic headlight system to malfunction.

■ **Automatic light off system (if equipped)**

Vehicles without a smart entry & start system

- When the light switch is in or : The headlights and front fog lights turn off automatically when the engine switch is turned to the “LOCK” position.
- When the light switch is in AUTO : The headlights and all the lights turn off automatically when the engine switch is turned to the “LOCK” position.

To turn the lights on again, turn the engine switch to the “ON” position, or turn the light switch off once and then back to or .

Vehicles with a smart entry & start system

- When the light switch is in or : The headlights and front fog lights turn off automatically when the “ENGINE START STOP” switch is turned off.
- When the light switch is in AUTO : The headlights and all the lights turn off automatically when the “ENGINE START STOP” switch is turned off.

To turn the lights on again, turn the “ENGINE START STOP” switch to IGNITION ON mode, or turn the light switch off once and then back to or .

■ **Light reminder buzzer**

Vehicles without a smart entry & start system
A buzzer sounds when the engine switch is turned “LOCK” or to “ACC” position and the driver's door is opened while the lights are turned on.

Vehicles with a smart entry & start system
A buzzer sounds when the “ENGINE START STOP” switch is turned off or turned to ACCESSORY mode and the driver's door is opened while the lights are turned on.

■ **Battery-saving function**

In the following conditions, the headlights and the other remaining lights will go off automatically after 20 minutes in order to prevent the vehicle battery from being discharged:

- The headlights and/or tail lights are on.
- The engine switch is in the “LOCK” position (vehicles without a smart entry & start system) or the “ENGINE START STOP” switch is turned off (vehicles with a smart entry & start system).
- The light switch is in or AUTO .

This function will be canceled in any of the following situations:

- When the engine switch is turned to the “ON” position (vehicles without a smart entry & start system) or the “ENGINE START STOP” switch is turned to IGNITION ON mode (vehicles with a smart entry & start system)
- When the light switch is operated
- When the door is opened or closed

Turning on the low beam headlights when the vehicle is parked in dark areas



Turn off the engine with the light switch in AUTO or off, and pull the light switch toward you and release it. The low beam headlights will turn on for about 30 seconds to light up the area around the vehicle.

The lights are turned off in the following situations.

- Vehicles without a smart entry & start system: The engine switch is turned to the “ON” position.
- Vehicles with a smart entry & start system: The “ENGINE START STOP” switch is turned to IGNITION ON mode.
- The light switch is turned on.
- The light switch is pulled toward you and then released.

Customization that can be configured at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional

Settings (e.g. light sensor sensitivity) can be changed.
(Customizable features →P. 536)

NOTICE

To prevent battery discharge

Do not leave the lights on longer than necessary when the engine is not running.

Fog light switch

The fog lights secure excellent visibility in difficult driving conditions, such as in rain and fog.

■ Front and rear fog light switch

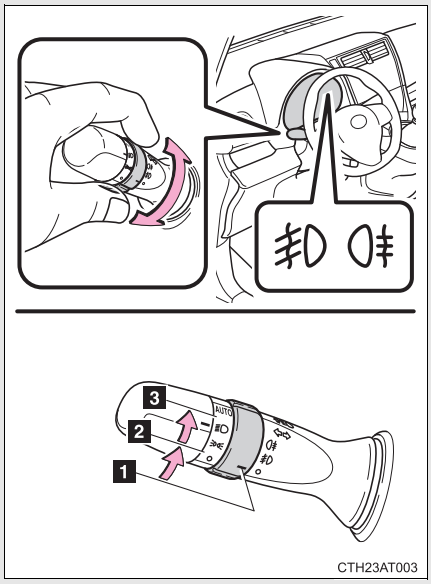

1 Turns the front and rear fog lights off

2 Turns the front fog lights on

3 Turns both front and rear fog lights on

Releasing the switch ring returns it to .

Operating the switch ring again turns only the rear fog lights off.

Rear fog light switch

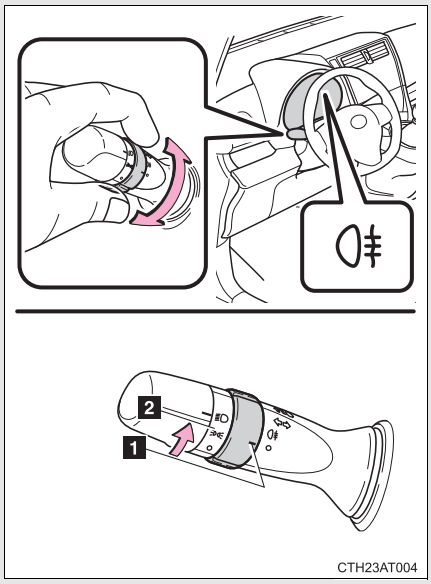

1 Turns the rear fog light off

2 Turns the rear fog light on

Releasing the switch ring returns it to the original position.

Operating the switch ring again turns the light off.

Fog lights can be used when

Vehicles with front and rear fog light switch
Front fog lights: The headlights or front position lights are turned on.

Rear fog lights: The front fog lights are turned on.

Vehicles with rear fog light switch
The headlights are turned on.

Intermittent windshield wiper

The wiper operation is selected by moving the lever as follows.

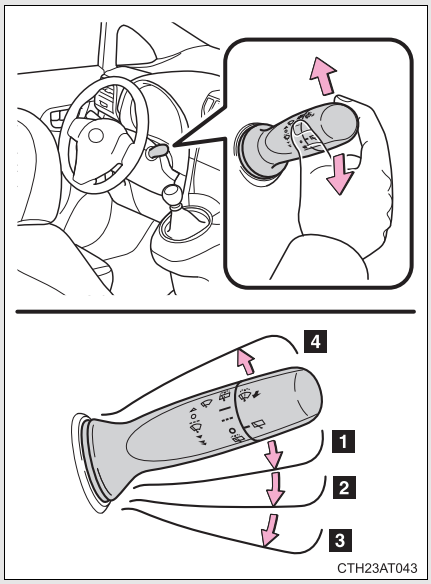

1 Intermittent windshield wiper operation

2 Low speed windshield wiper operation

3 High speed windshield wiper operation

4 Temporary operation

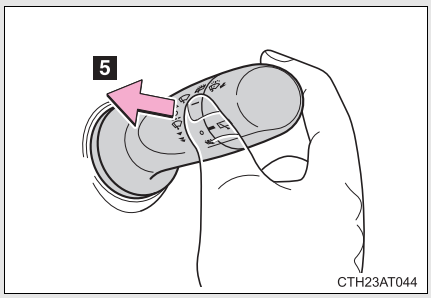

5 Washer/wiper dual operation

The wiper will automatically operate a couple of times after the washer squirts.

Rain-sensing windshield wiper

When “AUTO” is selected, the wiper will operate automatically when the sensor detects falling rain. The system automatically adjusts wiper timing in accordance with rain volume and vehicle speed.

When “AUTO” is selected, the sensor sensitivity can be adjusted as follows by turning the switch ring:

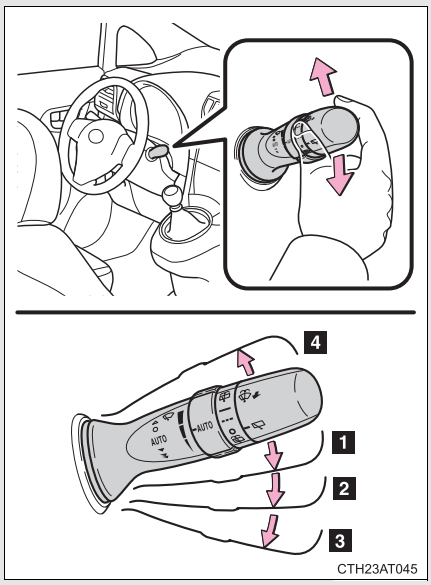

1 Rain-sensing wiper operation (“AUTO”)
2 Low speed wiper operation
3 High speed wiper operation
4 Temporary operation

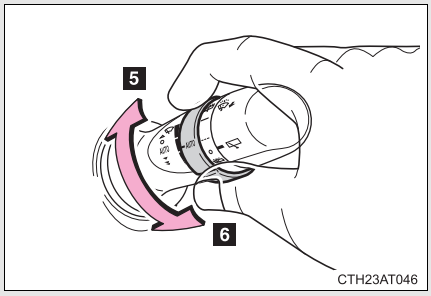

5 Increases the sensitivity

6 Decreases the sensitivity

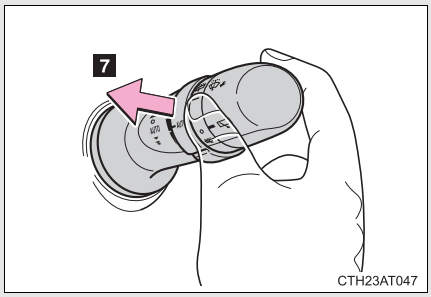

7 Washer/wiper dual operation

The wiper will automatically operate a couple of times after the washer squirts.

(After operating several times, the wiper operate one more time after a short delay to prevent dripping.)

■ **The windshield wiper and washer can be operated when**

Vehicles without a smart entry & start system: The engine switch is in the “ON” position.

Vehicles with a smart entry & start system: The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Raindrop sensor (vehicles with rain-sensing windshield wiper)**



- The raindrop sensor judges the amount of raindrops.

  An optical sensor is adopted. It may not operate properly when sunlight from the rising or setting of the sun intermittently strikes the windshield, or if bugs etc. are present on the windshield.

Vehicles without a smart entry & start system

- If the wiper switch is turned to the “AUTO” position while the engine switch is in the “ON” position, the wiper will operate once to show that “AUTO” mode is activated.
- When the sensor sensitivity ring is turned toward high while in “AUTO” mode, the wiper will operate once to indicate that the sensor sensitivity is enhanced.
- If the temperature of the raindrop sensor is 90°C (194°F) or higher, or -15°C (5°F) or lower, automatic operation may not occur. In this case, operate the wiper in any mode other than “AUTO”.

Vehicles with a smart entry & start system

- If the wiper switch is turned to the “AUTO” position while the “ENGINE START STOP” switch is in IGNITION ON mode, the wiper will operate once to show that “AUTO” mode is activated.
- When the sensor sensitivity ring is turned toward high while in “AUTO” mode, the wiper will operate once to indicate that the sensor sensitivity is enhanced.
- If the temperature of the raindrop sensor is 90°C (194°F) or higher, or -15°C (5°F) or lower, automatic operation may not occur. In this case, operate the wiper in any mode other than “AUTO”.

■ **If no windshield washer fluid sprays**

Check that the washer nozzles are not blocked if there is washer fluid in the windshield washer fluid reservoir.

⚠ CAUTION

■ **Caution regarding the use of windshield wiper in “AUTO” mode (vehicles with rain-sensing windshield wiper)**

The windshield wiper may operate unexpectedly if the sensor is touched or the windshield is subject to vibration in “AUTO” mode. Take care that your fingers etc. do not become caught in the windshield wiper.

NOTICE

■ **When the windshield is dry**

Do not use the wiper, as they may damage the windshield.

■ **When the washer fluid tank is empty**

Do not operate the switch continually as the washer fluid pump may overheat.

■ **When a nozzle becomes blocked**

In this case, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
Do not try to clear it with a pin or other object. The nozzle will be damaged.

Rear window wiper and washer

The wiper operation is selected by moving the lever as follows:

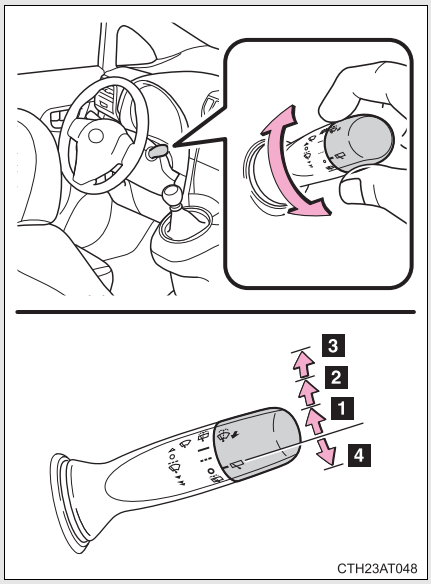

1 Intermittent window wiper operation

2 Normal window wiper operation

3 Washer/wiper dual operation

4 Washer/wiper dual operation

The wiper will automatically operate a couple of times after the washer squirts.

■ **The rear window wiper and washer can be operated when**

Vehicles without a smart entry & start system: The engine switch is in the “ON” position.

Vehicles with a smart entry & start system: The “ENGINE START STOP” switch is in IGNITION ON mode.

NOTICE

■ **When the rear window is dry**

Do not use the wiper, as it may damage the rear window.

■ **When the washer fluid tank is empty**

Do not operate the switch continually as the washer fluid pump may overheat.

■ **When a nozzle becomes blocked**

In this case, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
Do not try to clear it with a pin or other object. The nozzle will be damaged.

Stop & Start system*

Vehicles with a Multidrive: The Stop & Start system stops and restarts the engine according to the brake pedal and shift lever operation for stopping and starting the vehicle.

Vehicles with a manual transmission: The Stop & Start system stops and restarts the engine according to the clutch pedal operation for stopping and starting the vehicle.

While the engine is stopped by the Stop & Start system, the Stop & Start system operation time is displayed mandatorily on the multi-information display. This display can be hidden. (→P. 211)

■ Stopping the engine

Vehicles with a Multidrive

STEP 1 While driving in D or M, depress the brake pedal fully, and stop the vehicle.

STEP 2

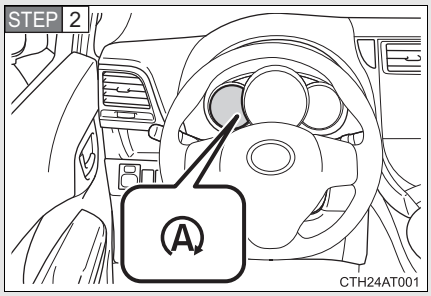

The engine will stop and the Stop & Start indicator will come on.

When the shift lever is in N or P, the engine will remain stopped without depressing the brake pedal.

*: If equipped

Vehicles with a manual transmission

STEP 1 With the clutch pedal fully depressed, stop the vehicle. Then shift the shift lever to N.

STEP 2

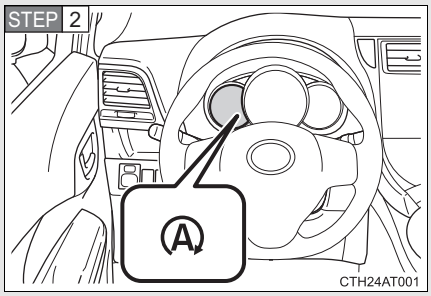

Release the clutch pedal.

The engine will stop and the Stop & Start indicator will come on.

■ **Restarting the engine**

Vehicles with a Multidrive

Release the brake pedal. When the shift lever is in N or P, depress brake pedal and shift the shift lever to D or M.

The engine will restart. The Stop & Start indicator will go off.

Vehicles with a manual transmission

Check that the shift lever is in N and depress the clutch pedal.

The engine will restart. The Stop & Start indicator will go off. (In this situation, releasing the clutch pedal will not stop the engine again.)

Disabling the Stop & Start system

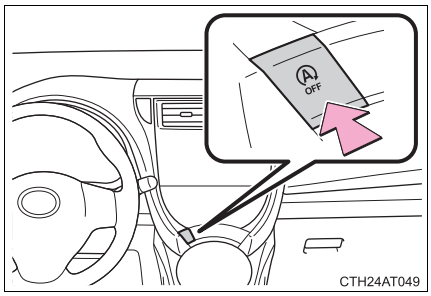

Press the Stop & Start cancel switch to disable the Stop & Start system.

The engine will not stop at each stop when the clutch pedal (vehicles with a manual transmission) or brake pedal (vehicles with a Multidrive) is depressed to stop the engine (→P. 238).

Pressing the switch again to re-enable the Stop & Start system.

If the Stop & Start cancel switch is pressed while the vehicle is stopped

- When the engine is stopped by the Stop & Start system, pressing the Stop & Start cancel switch will restart the engine.
  From the next time the vehicle is stopped (after Stop & Start system has been turned off), the engine will not be stopped.
- With the Stop & Start system disabled, pressing the Stop & Start cancel switch will re-enable the system but not stop the engine.
  From the next time the vehicle is stopped (after Stop & Start system has been turned on), the engine will be stopped.

Operating conditions

- The Stop & Start system is operational when all of the following conditions are met:
  - The engine is adequately warmed up.
  - The battery is sufficiently charged.
  - The driver's door is closed.
  - Vehicles with a Multidrive: The driver’s seat belt is fastened.
  - The hood is closed.

- In the following circumstances the engine may not be stopped by the Stop & Start system. This is not a malfunction of the Stop & Start system.
  - Engine coolant temperature is extremely high.
  - The air conditioning system is being used when the vehicle interior temperature is extremely high such as after the vehicle was parked under the hot sun.
  - The air conditioning system is being used when the outside temperature or the engine coolant temperature is low.
  - Vehicles with an automatic air conditioning system only: The windshield defogger is being used.
  - The battery is not sufficiently charged.
  - Due to traffic or other circumstances the vehicle is stopped repeatedly, resulting in the amount of time the engine is stopped by the Stop & Start system to become excessively high.

When the above conditions improve, the Stop & Start system will stop and restart the engine from the next time the vehicle is stopped.

Automatic engine start function

In the following situations, the engine may start even without the clutch pedal being depressed (vehicles with a manual transmission) or brake pedal being released (vehicles with a Multidrive).

- The brake pedal is pumped or strongly depressed.
- The air conditioning system is being used or turned on.
- Vehicles with an automatic air conditioning system only: The windshield defogger is turned on.
- The battery is not sufficiently charged.
- The vehicle starts to roll on an incline.
- Vehicles with a Multidrive: The hood is opened when the shift lever is in N or P.
- Vehicles with a Multidrive: The driver’s door is opened.
- Vehicles with a Multidrive: The driver’s seat belt is unfastened.

Automatic reactivation of the Stop & Start system

Vehicles without a smart entry & start system: Even if the Stop & Start system is disabled by the Stop & Start cancel switch, it will be automatically re-enabled once the engine switch is turned to the “LOCK” position then to the “START” position.

Vehicles with a smart entry & start system: Even if the Stop & Start system is disabled by the Stop & Start cancel switch, it will be automatically re-enabled once the “ENGINE START STOP” switch is turned off then the engine is started.

The Stop & Start system protection feature

Vehicles without a smart entry & start system: When an excessively loud sound is being projected by the audio system, the audio system may be automatically cut off in order to maintain power for the Stop & Start system function.
If this occurs, turning the engine switch to the “LOCK” position then to the “ACC” or “ON” position re-enables the audio system.

Vehicles with a smart entry & start system: When an excessively loud sound is being projected by the audio system, the audio system may be automatically cut off in order to maintain power for the Stop & Start system function.
If this occurs, turning the “ENGINE START STOP” switch off then to ACCESSORY mode or IGNITION ON mode re-enables the audio system.

Steering wheel operation

When the engine is stopped by the Stop & Start system, the steering wheel may become heavier than when driving.

Hood

If the hood is opened while the engine is stopped by the Stop & Start system, the engine cannot be restarted by the Stop & Start system or by the automatic engine start function. Restart the engine with the engine switch operation. (→P. 176, 186)

Vehicles with a Multidrive: If the hood is opened while the engine is stopped by the Stop & Start system and the shift lever is in N or P, the engine will restart.

■ **Stop & Start system warning buzzer**

If the engine is stopped by the Stop & Start system and either of the following actions is performed, a buzzer will sound and the Stop & Start indicator will flash (vehicles with a Multidrive), or a buzzer will sound (vehicles with a manual transmission). This indicates that the engine is only stopped by the Stop & Start system, not that the engine has been turned off completely.

- Vehicles with a Multidrive: The driver's door is opened when the shift lever is in D or M.
- Vehicles with a Multidrive: The shift lever is shifted into a position other than N or P with the brake pedal released.
- Vehicles with a manual transmission: The shift lever is shifted into a position other than N with the clutch pedal released.

■ **If the Stop & Start cancel indicator light continues to flash**

The Stop & Start system may be malfunctioning. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

■ **If the windshield is fogged up while the engine is stopped by the Stop & Start system**

- Vehicles with an automatic air conditioning system: Turn the windshield defogger on. (The engine will start due to the automatic engine start function.) (→P. 283)
- Vehicles with a manual air conditioning system: Restart the engine by depressing the clutch pedal (vehicles with a manual transmission) or releasing brake pedal (vehicles with a Multidrive) (→P. 239) or by pressing the Stop & Start cancel switch, and then set the air outlet selection dial to . (→P. 275)

  If the windshield fogs up frequently, press the Stop & Start cancel switch to deactivate the system.

■ **The Stop & Start system operation time and Stop & Start system total operation time display**

→P. 209

■ **Changing mandatory displaying/hiding of the Stop & Start system operation time**

→P. 211

CAUTION

When the Stop & Start system is operating

- Keep the shift lever in N and apply the brake pedal or parking brake for safety while the engine is stopped due to the Stop & Start system (while the Stop & Start indicator is on).
  Unexpected accidents may occur due to the automatic engine start function.
- Do not leave the vehicle while the engine is stopped due to the Stop & Start system (while the Stop & Start indicator is on).
  Unexpected accidents may occur due to the automatic engine start function.
- Ensure that the engine is not stopped by the Stop & Start system while the vehicle is in a poorly ventilated area. The engine may restart due to the automatic engine start function, causing exhaust gases to collect and enter the vehicle and resulting in death or a serious health hazard.

NOTICE

To ensure the system operates correctly

If any one of the following situations occurs, the Stop & Start system may not operate correctly, thus, please have your vehicle checked by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

- While the driver's seat belt is fastened, the driver's and front passenger's seat belt reminder light flashes.
- Even when the driver's seat belt is not fastened, the driver's and front passenger's seat belt reminder light remains off.
- Even when the driver's door is closed, the open door warning light comes on, or the interior light comes on when the interior light switch is in the door position.
- Even when the driver's door is opened, the open door warning light does not come on, or the interior light does not come on when the interior light switch is in the door position.

Cruise control*

Use the cruise control to maintain a set speed without depressing the accelerator pedal.

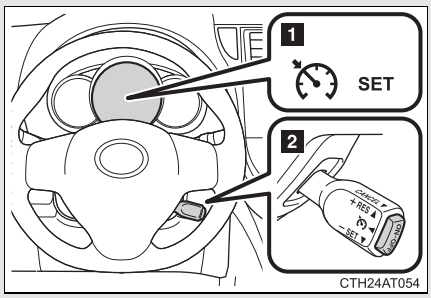

1 Indicators

2 Cruise control switch

■ Setting the vehicle speed

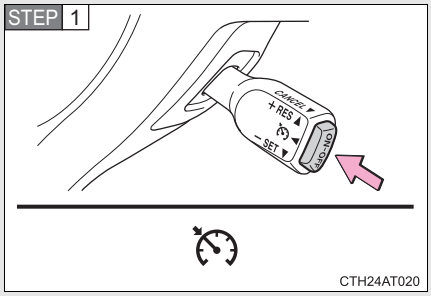

Press the “ON-OFF” button to activate the cruise control.

Cruise control indicator will come on.

Press the button again to deactivate the cruise control.

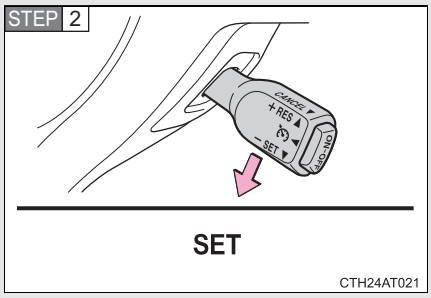

Accelerate or decelerate the vehicle to the desired speed, and push the lever down to set the speed.

“SET” indicator will come on.

The vehicle speed at the moment the lever is released becomes the set speed.

*: If equipped

Adjusting the set speed

To change the set speed, operate the lever until the desired set speed is obtained.

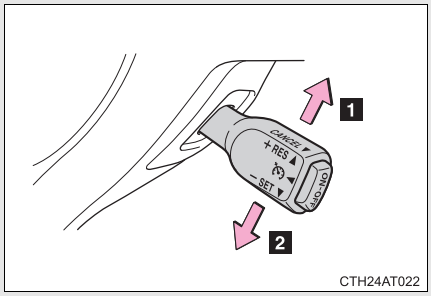

1 Increases the speed

2 Decreases the speed

Fine adjustment: Momentarily move the lever in the desired direction.

Large adjustment: Hold the lever in the desired direction.

The set speed will be increased or decreased as follows:

Fine adjustment: By approximately 1.6 km/h (1 mph) each time the lever is operated.

Large adjustment: The set speed can be increased or decreased continually until the lever is released.

Canceling and resuming the constant speed control

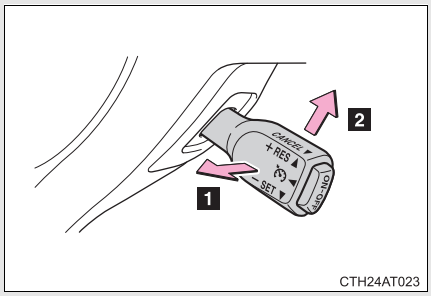

1 Pulling the lever toward you cancels the constant speed control.

The speed setting is also canceled when the brakes are applied or the clutch pedal (manual transmission only) is depressed.

2 Pushing the lever up resumes the constant speed control.

Resuming is available when the vehicle speed is more than approximately 40 km/h (25 mph).

■ **Cruise control can be set when**

- The shift lever is in the D or range 4 or higher of M has been selected. (vehicles with a Multidrive)
- Range 4 or higher has been selected by using the paddle shift. (vehicles with a Multidrive)
- Vehicle speed is above approximately 40 km/h (25 mph).

■ **Accelerating after setting the vehicle speed**

- The vehicle can be accelerated normally. After acceleration, the set speed resumes.
- Even without canceling the cruise control, the set speed can be increased by first accelerating the vehicle to the desired speed and then pushing the lever down to set the new speed.

■ **Automatic cruise control cancelation**

Cruise control will stop maintaining the vehicle speed in any of the following situations.

- Actual vehicle speed falls more than approximately 16 km/h (10 mph) below the preset vehicle speed.
  At this time, the memorized set speed is not retained.
- Actual vehicle speed is below approximately 40 km/h (25 mph).
- VSC+ is activated.

■ **If the cruise control indicator light flashes**

Press the “ON-OFF” button once to deactivate the system, and then press the button again to reactivate the system.
If the cruise control speed cannot be set or if the cruise control cancels immediately after being activated, there may be a malfunction in the cruise control system. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

■ **To avoid operating the cruise control by mistake**

Switch the cruise control off using the “ON-OFF” button when not in use.

■ **Situations unsuitable for cruise control**

Do not use cruise control in any of the following situations.
Doing so may result in loss of control and could cause an accident resulting in death or serious injury.

- In heavy traffic
- On roads with sharp bends
- On winding roads
- On slippery roads, such as those covered with rain, ice or snow
- On steep hills
  Vehicle speed may exceed the set speed when driving down a steep hill.
- When your vehicle is towing a trailer or during emergency towing

Driving assist systems

To help enhance driving safety and performance, the following systems operate automatically in response to various driving situations. Be aware, however, that these systems are supplementary and should not be relied upon too heavily when operating the vehicle.

ABS (Anti-lock Brake System)

Helps to prevent wheel lock when the brakes are applied suddenly, or if the brakes are applied while driving on a slippery road surface

Brake assist

Generates an increased level of braking force after the brake pedal is depressed when the system detects a panic stop situation

VSC (Vehicle Stability Control)

Helps the driver to control skidding when swerving suddenly or turning on slippery road surfaces

VSC+ (Vehicle Stability Control +)

Provides cooperative control of the ABS, TRC, VSC and EPS.
Helps to maintain directional stability when swerving on slippery road surfaces by controlling steering performance.

TRC (Traction Control)

Helps to maintain drive power and prevent the drive wheels from spinning when starting the vehicle or accelerating on slippery roads

Hill-start assist control (with Stop & Start system and Multi-drive)

Helps to prevent the vehicle from rolling backwards when the brake pedal is released to restart the engine

EPS (Electric Power Steering)

Employs an electric motor to reduce the amount of effort needed to turn the steering wheel

When the VSC/TRC systems are operating

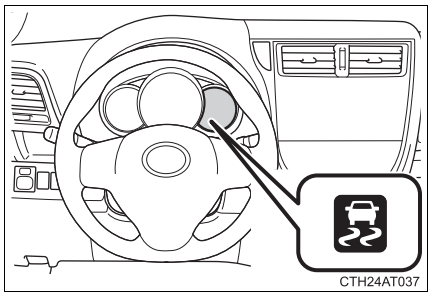

The slip indicator light will flash while the VSC/TRC systems are operating.

Disabling the TRC system

If the vehicle gets stuck in mud, dirt or snow, the TRC system may reduce power from the engine to the wheels. Pressing to turn the system off may make it easier for you to rock the vehicle in order to free it.

Left-hand drive vehicles

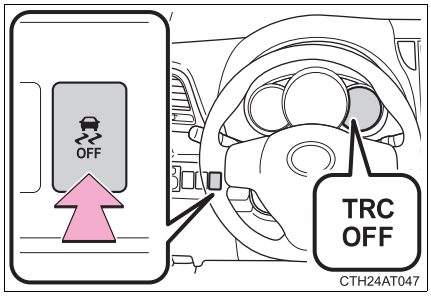

To turn the TRC system off, quickly press and release .

The “TRC OFF” indicator light will come on.

Press again to turn the system back on.

Right-hand drive vehicles

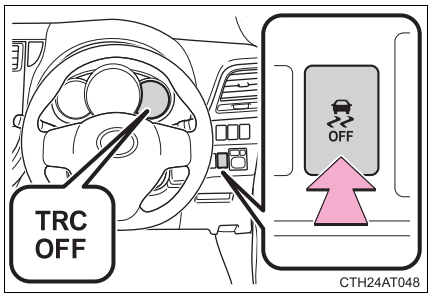

To turn the TRC system off, quickly press and release .

The “TRC OFF” indicator light will come on.

Press again to turn the system back on.

■ **Turning off both TRC and VSC systems**

To turn the TRC and VSC systems off, press and hold for more than 3 seconds while the vehicle is stopped.

The “TRC OFF” indicator light and the VSC OFF indicator light will come on.

Press again to turn the systems back on.

■ **Sounds and vibrations caused by the ABS, brake assist, VSC and TRC systems**

- A sound may be heard from the engine compartment when the brake pedal is depressed repeatedly, when the engine is started or just after the vehicle begins to move. This sound does not indicate that a malfunction has occurred in any of these systems.
- Any of the following conditions may occur when the above systems are operating. None of these indicates that a malfunction has occurred.
  - Vibrations may be felt through the vehicle body and steering.
  - A motor sound may be heard after the vehicle comes to a stop.
  - The brake pedal may pulsate slightly after the ABS is activated.
  - The brake pedal may move down slightly after the ABS is activated.

■ **EPS operation sound**

When the steering wheel is operated, a motor sound (whirring sound) may be heard. This does not indicate a malfunction.

Automatic reactivation of TRC and VSC systems

After turning the TRC and VSC systems off, the systems will be automatically re-enabled in the following situations:

- Vehicles without a smart entry & start system: When the engine switch is turned to the “LOCK” position.
- Vehicles with a smart entry & start system: When the “ENGINE START STOP” switch is turned off
- If only the TRC system is turned off, the TRC will turn on when vehicle speed increases
  If both the TRC and VSC systems are turned off, automatic re-enabling will not occur when vehicle speed increases.

Reactivation of the TRC system linked to vehicle speed

When the TRC system is turned off, it will turn on when vehicle speed increases. However, when the TRC and VSC systems are turned off, the systems will not turn on even when vehicle speed increases.

Reduced effectiveness of the EPS system

The effectiveness of the EPS system is reduced to prevent the system from overheating when there is frequent steering input over an extended period of time. The steering wheel may feel heavy as a result. Should this occur, refrain from excessive steering input or stop the vehicle and turn the engine off. The EPS system should return to normal within 10 minutes.

If the slip indicator comes on...

It may indicate a malfunction in the driving assist systems. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

■ **The ABS does not operate effectively when**

- The limits of tire gripping performance have been exceeded (such as excessively worn tires on a snow covered road).
- The vehicle hydroplanes while driving at high speed on wet or slick roads.

■ **Stopping distance when the ABS is operating may exceed that of normal conditions**

The ABS is not designed to shorten the vehicle's stopping distance. Always maintain a safe distance from the vehicle in front of you, especially in the following situations:

- When driving on dirt, gravel or snow-covered roads
- When driving with tire chains
- When driving over bumps in the road
- When driving over roads with potholes or uneven surfaces

■ **TRC may not operate effectively when**

Directional control and power may not be achievable while driving on slippery road surfaces, even if the TRC system is operating.
Drive the vehicle carefully in conditions where stability and power may be lost.

■ **When the VSC is activated**

The slip indicator light flashes. Always drive carefully. Reckless driving may cause an accident. Exercise particular care when the indicator light flashes.

■ **When the TRC/VSC systems are turned off**

Be especially careful and drive at a speed appropriate to the road conditions. As these are the systems to ensure vehicle stability and driving force, do not turn the TRC/VSC systems off unless necessary.

CAUTION

Replacing tires

Observe the following precautions.
Failure to do so may cause the ABS, VSC and TRC systems not to function correctly.

- Make sure that all tires are of the specified size, brand, tread pattern and total load capacity.
- Do not use tires of noticeably different wear level.
- Make sure that the tires are inflated to the recommended tire inflation pressure level. (→P. 531)

Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for further information when replacing tires or wheels.

Handling of tires and the suspension

Using tires with any kind of problem or modifying the suspension will affect the driving assist systems, and may cause a system to malfunction.

Diesel particulate filter system (diesel engine only)

When the deposit collected by the filter reaches a predetermined amount, it is automatically cleaned.

■ **Cleaning the DPF catalytic converter**

Cleaning the DPF catalytic converter is performed as necessary in accordance with driving conditions.

■ **Equipment characteristics**

The DPF system has the following characteristics:

- Idle speed increases during cleaning
- The smell of the exhaust gas changes
- When starting the engine, white-colored steam (water vapor) may be expelled during cleaning
- Acceleration performance may degrade during cleaning

■ **Replacing the engine oil**

→P. 380

CAUTION

■ **Exhaust pipe**

Do not touch the exhaust pipe during regeneration, as the exhaust pipe and exhaust gases will become particularly hot. Also, make sure that there are no people or flammable materials near the exhaust pipe while the vehicle is stopped.
Failure to do so may cause injury by burning or a fire.

NOTICE

To prevent the DPF system from failing

- Do not use fuel other than the specified type
- Do not use engine oil other than the recommended type
- Do not modify the exhaust pipe

Cargo and luggage

Take notice of the following information about storage precautions, cargo capacity and load:

- Stow cargo and luggage in the luggage compartment whenever possible.
- Be sure all items are secured in place.
- To maintain vehicle balance while driving, position luggage evenly within the luggage compartment.
- For better fuel economy, do not carry unnecessary weight.

CAUTION

Things that must not be carried in the luggage compartment

The following things may cause a fire if loaded in the luggage compartment:

- Receptacles containing gasoline
- Aerosol cans

Storage precautions

Observe the following precautions.
Failure to do so may result in death or serious injury.

- Stow cargo and luggage in the luggage compartment whenever possible.
- Do not stack anything in the luggage compartment higher than the seat-backs.
  Such items may be thrown about and possibly injure people in the vehicle in the event of sudden braking or in an accident.
- Do not place cargo or luggage in or on the following locations as the item may get under the clutch, brake or accelerator pedal and prevent the pedals from being depressed properly, block the driver's vision, or hit the driver or passengers, causing an accident:
  - At the feet of the driver
  - On the front passenger or rear seats (when stacking items)
  - On the luggage cover
  - On the instrument panel
  - On the dashboard

CAUTION

- Secure all items in the occupant compartment, as they may shift and injure someone during sudden braking, sudden swerving or an accident.
- When you fold down the rear seats, long items should not be place directly behind the front seats.
- Never allow anyone to ride in the luggage compartment. It is not designed for passengers. They should ride in their seats with their seat belts properly fastened. Otherwise, they are much more likely to suffer death or serious bodily injury, in the event of sudden braking, sudden swerving or an accident.

Load and distribution

- Do not overload your vehicle.
- Do not apply loads unevenly.
  Improper loading may cause deterioration of steering or braking control which may cause death or serious injury.

Winter driving tips

Carry out the necessary preparations and inspections before driving the vehicle in winter. Always drive the vehicle in a manner appropriate to the prevailing weather conditions.

Pre-winter preparations

- Use fluids that are appropriate to the prevailing outside temperatures.
  - Engine oil
  - Engine coolant
  - Washer fluid
- Have a service technician inspect the level and specific gravity of battery electrolyte.
- Have the vehicle fitted with four snow tires or purchase a set of tire chains for the front tires.

  Ensure that all tires are the same size and brand and that their wear level is not noticeably different with each other. Also make sure that chains match the size of the tires.

Before driving the vehicle

Perform the following according to the driving conditions:

- Do not try to forcibly open a window or move a wiper that is frozen. Pour warm water over the frozen area to melt the ice. Wipe away the water immediately to prevent it from freezing.
- To ensure proper operation of the climate control system fan, remove any snow that has accumulated on the air inlet vents in front of the windshield.
- Remove any ice that has accumulated on the vehicle chassis.
- Periodically check for and remove any excess ice or snow that may have accumulated in the wheel well or on the brakes.

■ **When driving the vehicle**

Accelerate the vehicle slowly and drive at a reduced speed suitable to the road conditions.

■ **When parking the vehicle (in the winter time or in the cold latitudes)**

Park the vehicle and move the shift lever to P (vehicles with a Multidrive), E, M or R (vehicles with a multi-mode manual transmission), and 1 or R (vehicles with a manual transmission) without setting the parking brake. The parking brake may freeze up, preventing it from being released. If necessary, block the wheels to prevent inadvertent sliding or creeping.

Selecting tire chains

Use the correct tire chain size when mounting the tire chains.
Chain size is regulated for each tire size.

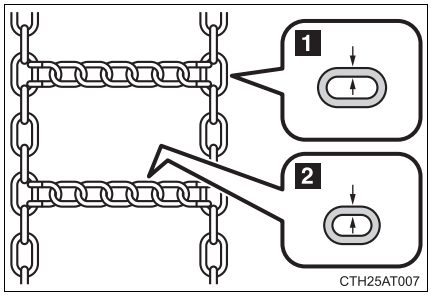

1 Side chain
3 mm (0.12 in.) in diameter

2 Cross chain
4 mm (0.16 in.) in diameter

Regulations on the use of tire chains

Regulations regarding the use of tire chains vary depending on location and type of road. Always check local regulations before installing chains.

Tire chain installation

Observe the following precautions when installing and removing chains:

- Install and remove tire chains in a safe location.
- Install tire chains on the front tires only. Do not install tire chains on the rear tires.
- Install tire chains on front tires as tightly as possible. Retighten chains after driving 0.5 — 1.0 km (1/4 — 1/2 mile).
- Install tire chains following the instructions provided with the tire chains.

CAUTION

■ **Driving with snow tires**

Observe the following precautions to reduce the risk of accidents.
Failure to do so may result in a loss of vehicle control and cause death or serious injury.

- Use tires of the specified size.
- Maintain the recommended level of air pressure.
- Do not drive at speeds in excess of the speed limit or the speed limit specified for the snow tires being used.
- Use snow tires on all, not just some wheels.
- Do not use tires of noticeably different wear level.

■ **Driving with tire chains**

Observe the following precautions to reduce the risk of accidents.
Failure to do so may result in the vehicle being unable to be driven safely, and may cause death or serious injury.

- Do not drive in excess of the speed limit specified for the tire chains being used, or 50 km/h (30 mph), whichever is lower.
- Avoid driving on bumpy road surfaces or over potholes.
- Avoid sudden turns and braking, as use of chains may adversely affect vehicle handling.
- Slow down sufficiently before entering a curve to ensure that vehicle control is maintained.

Trailer towing

Your vehicle is designed primarily as a passenger carrying vehicle. Towing a trailer will have an adverse effect on handling, performance, braking, durability, and fuel consumption. Your safety and satisfaction depend on the proper use of correct equipment and cautious driving habits. For your safety and the safety of others, do not overload the vehicle or trailer.

To tow a trailer safely, use extreme care and drive the vehicle in accordance with the trailer's characteristics and operating conditions.

Toyota warranties do not apply to damage or malfunction caused by towing a trailer for commercial purposes.

Ask your local authorized Toyota dealer or repairer, or another duly qualified and equipped professional for further details before towing, as there are additional legal requirements in some countries.

■ Weight limits

Check the allowable towing capacity, GVM (Gross Vehicle Mass), MPAC (Maximum Permissible Axle Capacity), and permissible draw bar load before towing. (→P. 518)

■ Towing hitch/bracket

Toyota recommends the use of the Toyota hitch/bracket for your vehicle. Other products of a suitable nature and comparable quality may also be used.

Important points regarding trailer loads

Total trailer weight and permissible drawbar load

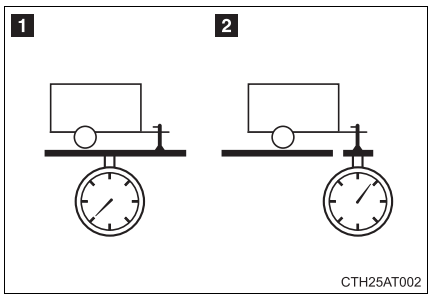

1 Total trailer weight

Weight of the trailer itself plus the trailer load should be within the maximum towing capacity. Exceeding this weight is dangerous. (→P. 518)

When towing a trailer, use a friction coupler or friction stabilizer (sway control device).

2 Permissible drawbar load

Allocate the trailer load so that the drawbar load is greater than 25 kg (55.1 lb.) or 4% of the towing capacity. Do not let the drawbar load exceed the indicated weight. (→P. 518)

Information tag (manufacturer's label)

Type A

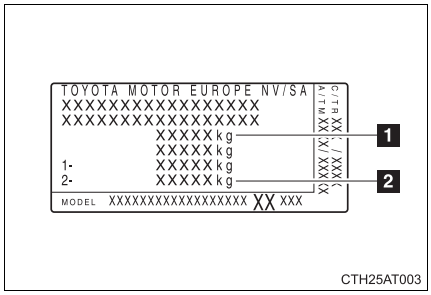

1 Gross vehicle mass

2 Maximum permissible rear axle capacity

Type B

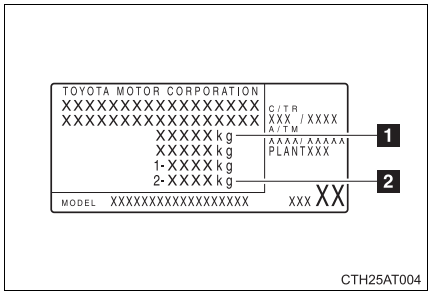

1 Gross vehicle mass

2 Maximum permissible rear axle capacity

Gross vehicle mass

The combined weight of the driver, passengers, luggage, towing hitch, total curb mass and drawbar load should not exceed the gross vehicle mass by more than 100 kg (220.5 lb.). Exceeding this weight is dangerous.

Maximum permissible rear axle capacity

The weight borne by the rear axle should not exceed the maximum permissible axle capacity by 15% or more. Exceeding this weight is dangerous.

The values for towing capacity were derived from testing conducted at sea level. Take note that engine output and towing capacity will be reduced at high altitudes.

CAUTION

■ **When the gross vehicle mass limit or maximum permissible axle capacity is exceeded**

Do not exceed the established speed limit for towing a trailer in built-up areas or 100 km/h (62 mph), whichever is the lower.

Failing to observe this precaution may lead to an accident causing death or serious injury.

Installation positions for the towing hitch/bracket and hitch ball

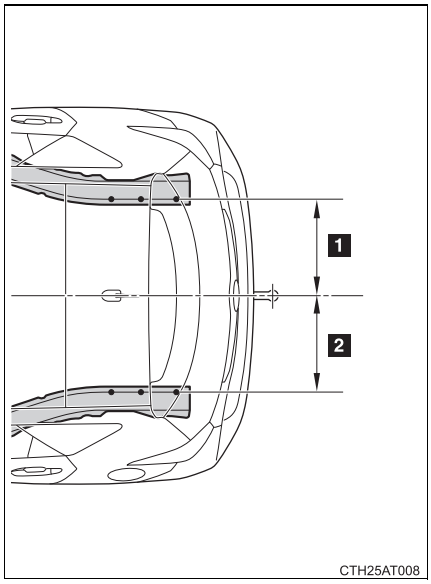

1 434 mm (17.1 in.)
2 434 mm (17.1 in.)

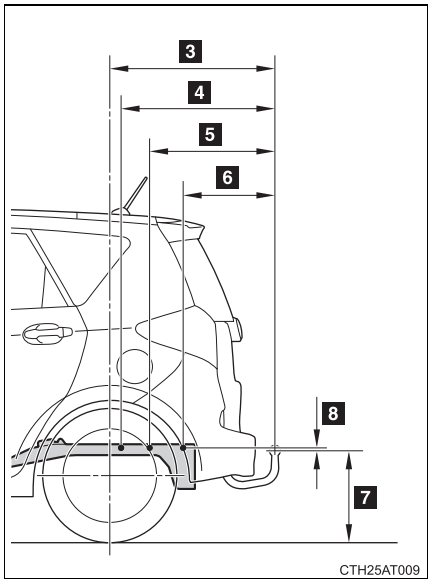

3 768 mm (30.2 in.)
4 715 mm (28.1 in.)
5 581 mm (22.9 in.)
6 426 mm (16.8 in.)
7 377 mm (14.8 in.)
8 4 mm (0.2 in.)

■ **Tire information**

- Ensure that your vehicle's tires are properly inflated. Adjust the tire pressure to the recommended pressure. (→P. 531)
- Increase the air pressure of the trailer tires in accordance with the total trailer weight and according to the values recommended by the manufacturer of your trailer.

■ **Trailer lights**

Check that the turn signal lights and stoplights are operating correctly every time you hitch up the trailer. Directly wiring up to your vehicle may damage the electrical system and stop the lights from functioning correctly.

■ **Break-in schedule**

Toyota recommends that vehicles fitted with new power train components should not be used for towing trailers for the first 800 km (500 miles).

■ **Safety checks before towing**

- Check that the maximum load limit for the towing hitch/bracket and hitch ball is not exceeded. Bear in mind that the coupling weight of the trailer will add to the load exerted on the vehicle. Also make sure that the total load exerted on the vehicle is within the range of the weight limits. (→P. 264)
- Ensure that the trailer load is secure.
- Supplementary outside rear view mirrors should be added to the vehicle if the traffic behind cannot be clearly seen with standard mirrors. Adjust the extending arms of these mirrors on both sides of the vehicle so that they always provide maximum visibility of the road behind.

■ **Maintenance**

- Maintenance must be performed more frequently when using the vehicle for towing due to the greater weight burden placed on the vehicle compared to normal driving.
- Retighten all bolts securing the hitching ball and bracket after towing for approximately 1000 km (600 miles).

NOTICE

When the rear bumper strengthening material is aluminum

Ensure the steel bracket part does not come directly in contact with that area.
When steel and aluminum come into contact, there is a reaction similar to corrosion, which will weaken the section concerned and may result in damage. Apply a rust inhibitor to parts that will come in contact when attaching a steel bracket.

Guidance

Your vehicle will handle differently when towing a trailer. In order to avoid accident, death or serious injury, keep the following in mind when towing:

Checking connections between trailer and lights

Stop the vehicle and check the operation of the connection between the trailer and lights after driving for a brief period as well as before starting off.

Practicing driving with a coupled trailer

- Get the feel for turning, stopping and reversing with the trailer coupled by practicing in an area with no or light traffic.
- When reversing with a coupled trailer, hold the section of the steering wheel nearest to you and rotate clockwise to turn the trailer left or counterclockwise to turn it right. Always rotate a little at a time to prevent steering error. Have someone guide you when reversing to lessen the risk of an accident.

Increasing vehicle-to-vehicle distance

At a speed of 10 km/h (6 mph), the distance to the vehicle running ahead of you should be equivalent to or greater than the combined length of your vehicle and trailer. Avoid sudden braking that may cause skidding. Otherwise, the vehicle may spin out of control. This is especially true when driving on wet or slippery road surfaces.

Sudden acceleration/steering input/cornering

Executing sharp turns when towing may result in the trailer colliding with your vehicle. Decelerate well in advance when approaching turns and take them slowly and carefully to avoid sudden braking.

Important points regarding turning

The wheels of the trailer will travel closer to the inside of the curve than the wheels of the vehicle. To make allowance for this, take the turns wider than you would normally do.

Important points regarding stability

Vehicle movement resulting from uneven road surfaces and strong crosswinds will affect handling. The vehicle may also be rocked by passing buses or large trucks. Frequently check behind when moving alongside such vehicles. As soon as such vehicle movement occurs, immediately start to decelerate smoothly by slowly applying the brakes. Always steer the vehicle straight ahead while braking.

Passing other vehicles

Consider the total combined length of your vehicle and trailer and ensure that the vehicle-to-vehicle distance is sufficient before executing lane changes.

■ **Transmission information**

Vehicles with a Multidrive and multi-mode manual transmission

Select an appropriate gear in M mode to maintain the effectiveness of engine braking and to maintain charging system performance.

Vehicles with a manual transmission

Refrain from driving in 6th gear to maintain the effectiveness of engine braking and to maintain charging system performance.

■ **If the engine overheats**

Towing a loaded trailer up a long, steep incline in temperatures exceeding 30°C (85°F) may result in the engine overheating. If the high engine coolant temperature warning light flashes or comes on, turn the air conditioning off immediately, leave the road and stop the vehicle in a safe place. (→P. 505)

■ **When parking the vehicle**

Always place wheel chocks under the wheels of both the vehicle and trailer. Firmly set the parking brake and shift the shift lever to P for Multidrives, E, M or R for multi-mode manual transmissions, and 1 or R for manual transmissions.

CAUTION

Follow all the instructions described in this section. Failure to do so could cause an accident resulting in death or serious injury.

■ **Trailer towing precautions**

When towing, make sure that none of the weight limits are exceeded. (→P. 264)

■ **Vehicle speed in towing**

Observe the legal maximum speeds for trailer towing.

■ **Before descending hills or long declines**

Reduce speed and downshift. Never downshift abruptly while descending steep or long downhill grades.

■ **Operation of the brake pedal**

Do not hold the brake pedal depressed often or for long periods of time. Doing so may result in the brake overheating or reduce braking effects.

■ **To avoid accident or injury (vehicles with the compact spare tire)**

Do not tow the vehicle with the compact spare tire installed.

Interior features 3

3-1. Using the air conditioning system and defogger

Manual air conditioning system 274
Automatic air conditioning system 280
Power heater 286
Rear window and outside rear view mirror defoggers 288

3-2. Using the audio system

Audio system types 290
Using the radio 292
Using the CD player 296
Playing back MP3 and WMA discs..... 301
Operating an iPod..... 308
Operating a USB memory..... 316
Optimal use of the audio system 324
Using the AUX port..... 326
Using the steering wheel audio switches 327

3-3. Using the interior lights

Interior lights list..... 330
• Personal lights..... 331
• Personal/interior lights.... 331
• Interior light..... 332

3-4. Using the storage features

List of storage features 333
• Auxiliary box 334
• Glove box 334
• Bottle holders..... 336
• Tray 337
• Cup holders 338

3-5. Other interior features

Sun visors 339
Vanity mirrors..... 340
Clock..... 341
Outside temperature display 342
Power outlets 343
Seat heaters 345
Armrests 347
Panoramic roof shade..... 348
Assist grips 351
Floor mat..... 352
Luggage compartment features..... 354

Manual air conditioning system*

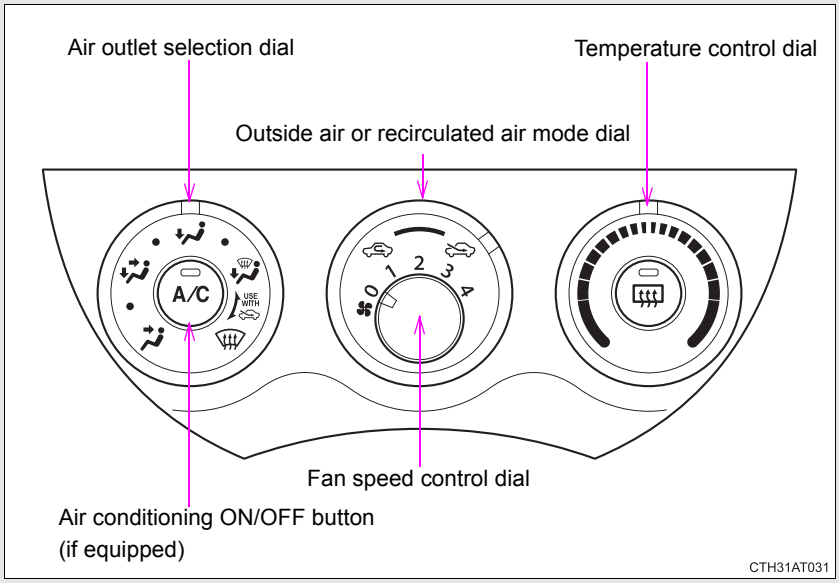

Adjusting the settings

■ **Adjusting the temperature setting (vehicles without the A/C button)**

Turn the temperature control dial clockwise to increase the temperature.

■ **Adjusting the temperature setting (vehicles with the A/C button)**

Turn the temperature control dial clockwise (warm) or counterclockwise (cool).

If A/C is not pressed, the system will blow ambient temperature air or heated air.

*: If equipped

Adjusting the fan speed

Turn the fan speed control dial clockwise (increase) or counter-clockwise (decrease).

Set the dial to “0” to turn the fan off.

Selecting the air outlets

Set the air outlet selection dial to an appropriate position.

The positions between the air outlet selections shown below can also be selected for more detailed adjustment.

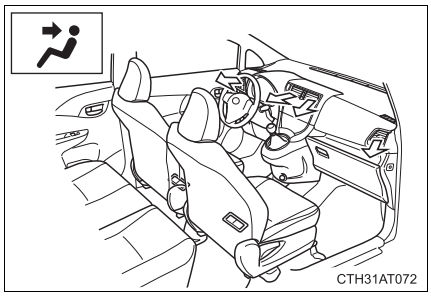

Air flows to the upper body.

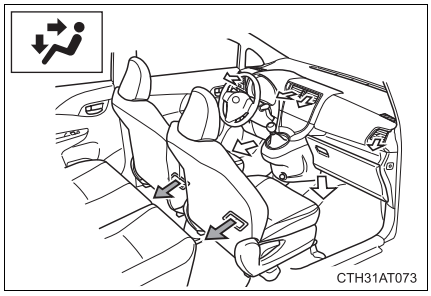

Air flows to the upper body and feet.

⇦ : Some models

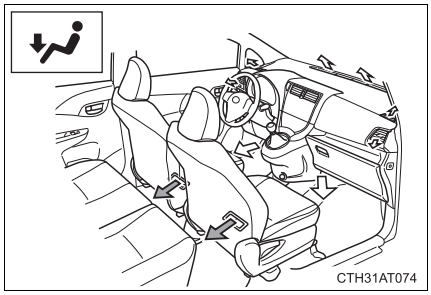

Mainly air flows to the feet.

: Some models

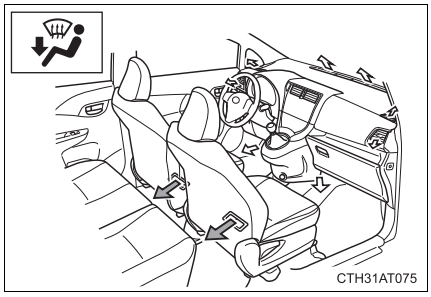

Air flows to the feet and the windshield defogger operates.

Use the air mode dial at (outside air mode) (→P. 278)

: Some models

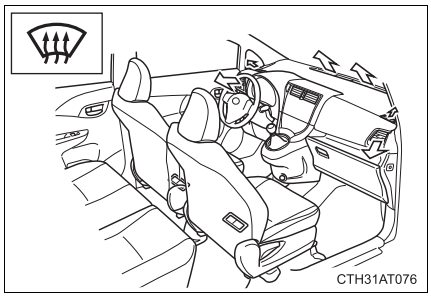

Air flows to the windshield and side windows.

Use the air mode dial at (outside air mode) (→P. 278)

Vehicles with the A/C button:

Pressing A/C to turn the air conditioning on clears the windshield and side windows faster.

■ **Switching between outside air and recirculated air modes**

Turn the outside air or recirculated air mode dial to (outside air mode) or (recirculated air mode).

Adjusting the position of and opening and closing the air outlets

Center outlets

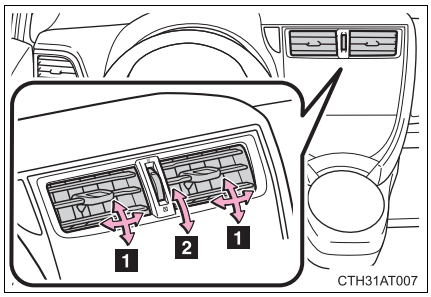

1 Direct air flow to the left or right, up or down.

2 Turn the knob to open or close the vent.

Right and left side outlets

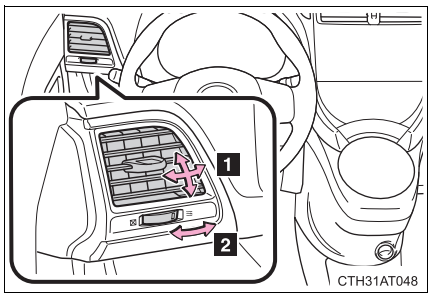

1 Direct air flow to the left or right, up or down.

2 Turn the knob to open or close the vent.

■ **Using the system in recirculated air mode**

The windows will fog up more easily if recirculated air mode is used for an extended period of time.

■ **When is selected for the air outlets used**

For your driving comfort, air flowing to the feet may be warmer than air flowing to the upper body depending on the position of the temperature adjustment dial.

■ **When the indicator light on A/C goes off by itself (vehicles with the A/C button)**

Press A/C to turn off the cooling and dehumidification function and turn it on again. There may be a problem in the air conditioning system if the indicator light goes off again. Turn the air conditioning system off and have it inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

■ **When outside air temperature is decreased to around 0°C (32°F) (vehicles with the A/C button)**

The air conditioning system may not operate even when A/C is pressed.

■ **Air conditioning odors**

- During use, various odors from inside and outside the vehicle may enter into and accumulate in the air conditioning system. This may then cause odor to be emitted from the vents.
- To reduce potential odors from occurring:
  It is recommended that the air conditioning system be set to outside air mode prior to turning the vehicle off.

■ **An odor comes from the air conditioning system due to the Stop & Start system operation (vehicles with a Stop & Start system)**

When the engine is stopped due to the Stop & Start system, an odor caused by moisture may be detected. This does not indicate a malfunction.

CAUTION

■ **To prevent the windshield from fogging up**

Do not use during cool air operation in extremely humid weather. The difference between the temperature of the outside air and that of the windshield can cause the outer surface of the windshield to fog up, blocking your vision.

NOTICE

■ **To prevent battery discharge**

Do not leave the air conditioning system on longer than necessary when the engine is stopped.

Automatic air conditioning system*

Air outlets and fan speed are automatically adjusted according to the temperature setting.

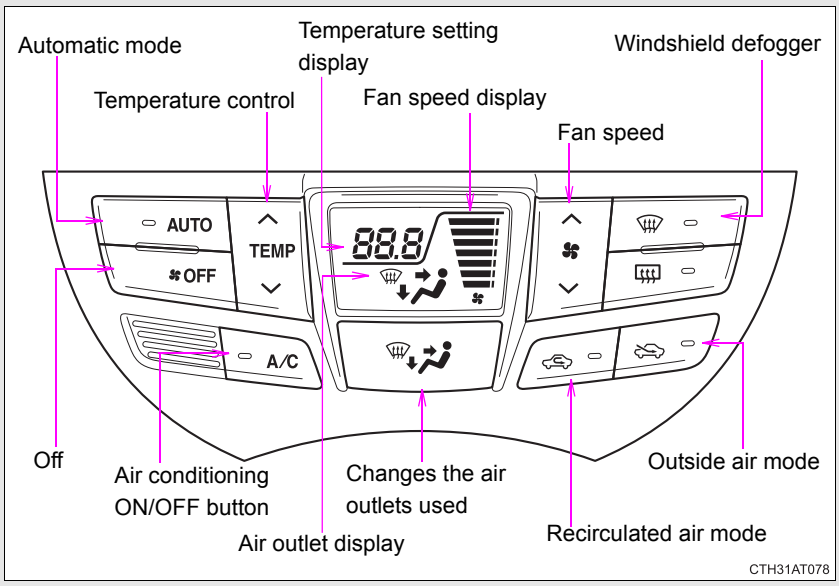

Using the automatic mode

STEP 1 Press AUTO.

Air outlets and fan speed are automatically adjusted according to the temperature setting.

STEP 2 Press "∧" to increase the temperature and "∨" to decrease the temperature on TEMP.

STEP 3 Press A/C.

The air conditioning system (cooling function) turns on and off each time A/C is pressed.

*: If equipped

Adjusting the settings

■ Turning the cooling function on and off

Press A/C .

The air conditioning system (cooling function) turns on and off each time A/C is pressed.

■ Adjusting the temperature setting

Press "∧" to increase the temperature and "∨" to decrease the temperature on TEMP .

■ Adjusting the fan speed

Press "∧" (increase) or "∨" (decrease) on .

The fan speed is shown on the display. (7 levels)

Press OFF to turn the fan off.

■ Changing the air outlets

Press .

The air outlets switch each time is pressed. The air flow shown on the display indicates the following.

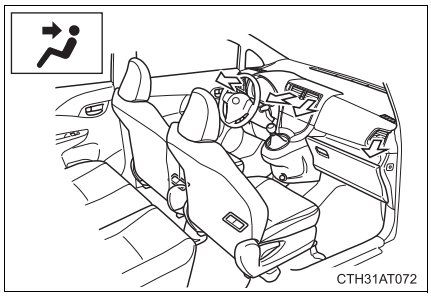

Air flows to the upper body.

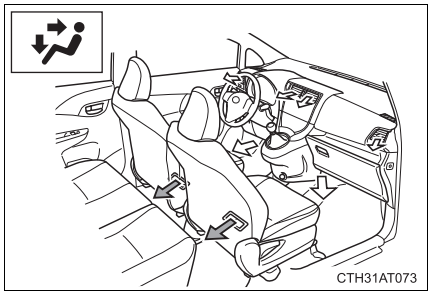

Air flows to the upper body and feet.

: Some models

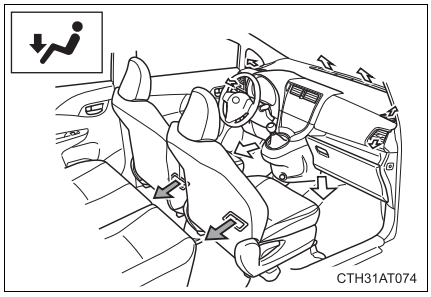

Mainly air flows to the feet.

: Some models

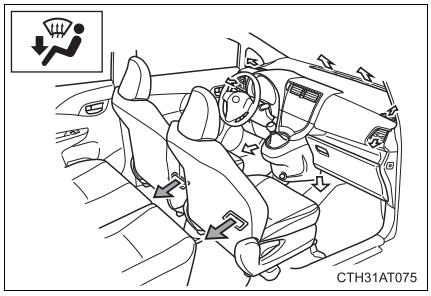

Air flows to the feet and the windshield defogger operates.

: Some models

■ **Switching air intake modes**

Press to select outside air mode.

Press to select recirculated air mode.

Defogging the windshield

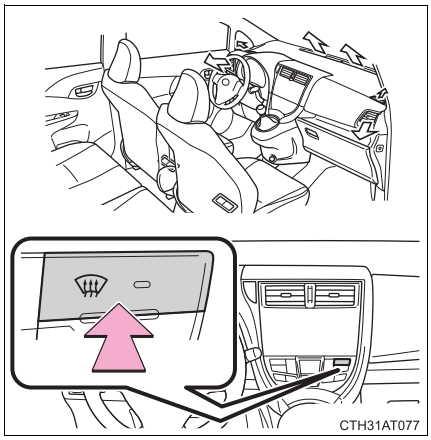

Defogging

The air conditioning system operates automatically.

Recirculated air mode will automatically switch to outside air mode when the ambient temperature is low.

Adjusting the position of and opening and closing the air outlets

Center outlets

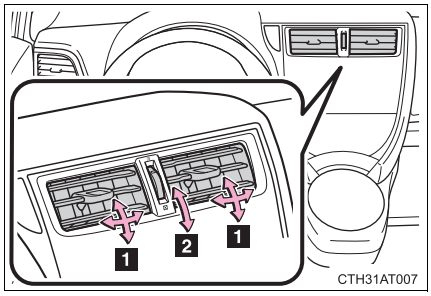

1 Direct air flow to the left or right, up or down.

2 Turn the knob to open or close the vent.

Right and left side outlets

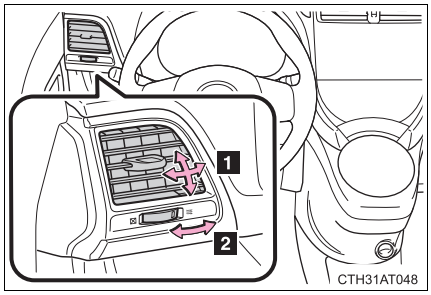

1 Direct air flow to the left or right, up or down.

2 Turn the knob to open or close the vent.

■ **Using the automatic mode**

Fan speed is adjusted automatically in accordance with the temperature setting and ambient conditions. As a result, the following may occur.

- Immediately after AUTO is pressed, the fan may stop for a while until warm or cool air is ready to flow.
- Cool air may flow to the area around the upper body when the heater is on.

■ **Switching between outside air and recirculated air modes**

Recirculated air mode or outside air mode may be automatically switched in accordance with the temperature setting and the inside temperature.

■ **Using the system in recirculated air mode**

The windows will fog up more easily if recirculated air mode is used.

■ **Window defogger feature**

Recirculated air mode may automatically switch to (outside air) mode in situations where the windows need to be defogged.

■ **When the indicator light on A/C goes off by itself**

Press A/C to turn off the cooling and dehumidification function and turn it on again. There may be a problem in the air conditioning system if the indicator light goes off again. Turn the air conditioning system off and have it inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

■ **When outside air temperature is decreased to around 0°C (32°F)**

The air conditioning system may not operate even when A/C is pressed.

■ **When is selected for the air outlets used**

For your driving comfort, air flowing to the feet may be warmer than air flowing to the upper body depending on the temperature setting.

Air conditioning odors

- During use, various odors from inside and outside the vehicle may enter into and accumulate in the air conditioning system. This may then cause odor to be emitted from the vents.
- To reduce potential odors from occurring:
  - It is recommended that the air conditioning system be set to outside air mode prior to turning the vehicle off.
  - The start timing of the blower may be delayed for a short period of time immediately after the air conditioning system is started in automatic mode.

An odor comes from the air conditioning system due to the Stop & Start system operation (vehicles with a Stop & Start system)

When the engine is stopped due to the Stop & Start system, an odor caused by moisture may be detected. This does not indicate a malfunction.

CAUTION

To prevent the windshield from fogging up

Do not use during cool air operation in extremely humid weather. The difference between the temperature of the outside air and that of the windshield can cause the outer surface of the windshield to fog up, blocking your vision.

NOTICE

To prevent battery discharge

Do not leave the air conditioning system on longer than necessary when the engine is stopped.

Power heater*

This feature is used to keep the cabin warm in cold conditions.

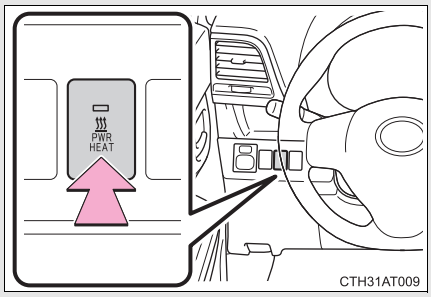

Turns the power heater on/off

The power heater turns on about 25 seconds after the button is pressed, and takes about another 85 seconds to warm up.

■ **Power heater can be operated when**

The engine is running.

■ **Normal characteristics of power heater operation**

The following cases do not indicate a malfunction:

- When the power heater is turned on or off, some white smoke and a slight odor may be emitted from the power heater exhaust that is located under the floor.
- When the power heater is used under extremely cold conditions, vapor may be visible from its exhaust.
- When the power heater is turned off, you may hear a sound in the engine compartment for about 2 minutes until the power heater turns off completely.

■ **After the heater is turned off**

We recommend not restarting the heater for 10 minutes after you turn it off. Otherwise, a noise may be heard as the heater ignites.

■ **When refueling your vehicle**

The engine must be turned off. Turning the engine off turns the power heater off.

*: If equipped

CAUTION

■ **To prevent burns or damage to your vehicle**



- Do not touch the heater or its exhaust pipe as they are hot. You may burn yourself.
- Keep flammable items such as fuel away from the heater and its exhaust pipe, as this may cause a fire.

NOTICE

■ **To prevent damage to your vehicle**

- Do not turn the heater on and off repeatedly in 5 minute intervals as this can shorten the life of the heater components. If the engine must be turned on and off repeatedly within short intervals (such as when the vehicle is being used for delivery purposes), turn the heater off.
- Do not modify or open the heater without consulting any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, as this may cause a heater malfunction or a fire.
- Be careful not to splash or spill liquid directly on the heater or on the heater fuel pump, as this may cause the heater to malfunction.
- Keep the intake and exhaust pipes of the heater free from water, snow, ice, mud, etc. If the pipes become clogged, this can cause the heater to malfunction.
- If you notice anything unusual, such as a fluid leak, smoke and poor operation, turn off the heater and have your vehicle checked by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Rear window and outside rear view mirror defoggers

Defoggers are used to defog the rear window, and to remove raindrops, dew and frost from the outside rear view mirrors.

Vehicles with a manual air conditioning system

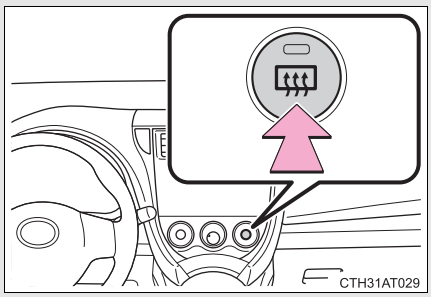

On/off

Vehicles with timer: The defoggers will automatically turn off after approximately 15 minutes.

Vehicles with an automatic air conditioning system

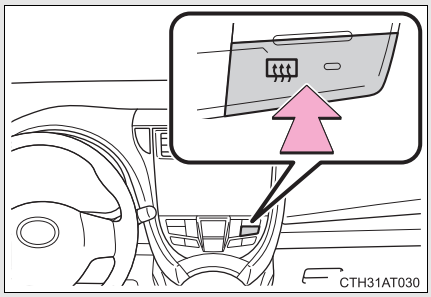

On/off

The defoggers will automatically turn off the operation time. The operation time is between 15 minutes and 1 hour depending on the ambient temperature and vehicle speed.

■ **The defoggers can be operated when**

Vehicles without a smart entry & start system
The engine switch is in the “ON” position.

Vehicles with a smart entry & start system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Outside rear view mirror defoggers (if equipped)**

Turning the rear window defogger on will turn the outside rear view mirror defoggers on.

CAUTION

■ **Outside rear view mirror defoggers (if equipped)**

The surfaces of the outside rear view mirrors may become hot. To prevent burns do not touch the mirrors.

NOTICE

■ **To prevent battery discharge (vehicles without timer)**

Do not leave the rear window defogger on longer than necessary when the engine is stopped.

Audio system types*

Vehicles with an audio system

CD player with changer controller and AM/FM radio

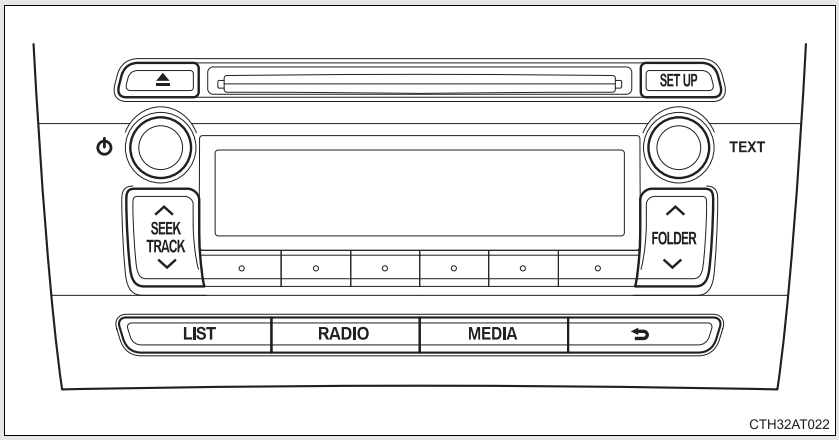

Title	Page
Using the radio	P. 292
Using the CD player	P. 296
Playing back MP3 and WMA discs	P. 301
Operating an iPod	P. 308
Operating a USB memory	P. 316
Optimal use of the audio system	P. 324
Using the AUX port	P. 326
Using the steering wheel audio switches	P. 327

*: If equipped

Vehicles with a navigation/multimedia system

Owners of models equipped with a navigation/multimedia system should refer to the “Navigation and multimedia system Owner's manual”.

NOTICE

■ **To prevent battery discharge**

Do not leave the audio system on longer than necessary when the engine is stopped.

■ **To avoid damaging the audio system**

Take care not to spill drinks or other fluids over the audio system.

Using the radio*

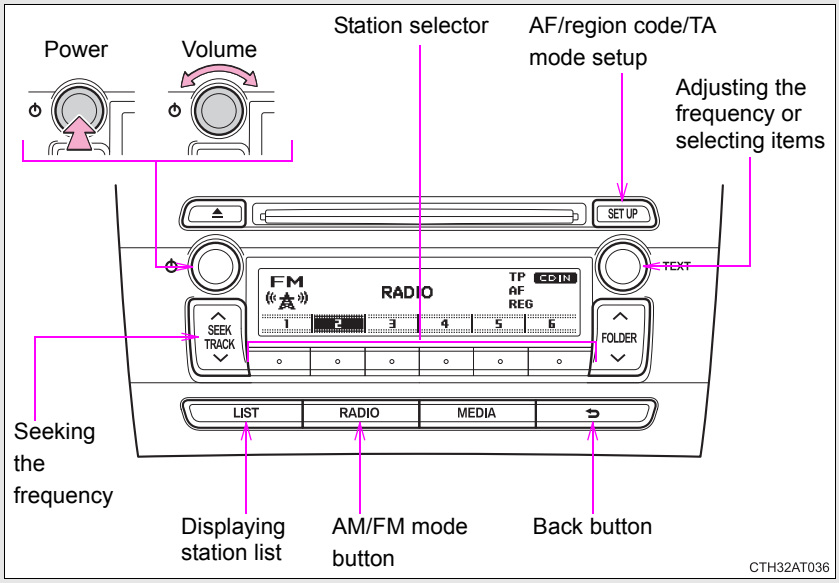

Setting station presets

STEP 1 Search for desired stations by turning or pressing "∧" or "∨" on .

STEP 2 Press and hold the button (from [1] to [6]) the station is to be set to until you hear a beep.

*: If equipped

Using the station list

■ Updating the station list

STEP 1 Press LIST .

The station list will be displayed.

STEP 2 Press ○ (UPDATE) to update the list.

"Updating" is displayed while the searching is in process, and then available stations will be listed on the display.

To cancel the updating process, press ↩ .

■ Selecting a station from the station list

STEP 1 Press LIST .

The station list will be displayed.

STEP 2 Turn SET UP TEXT to select a station.

STEP 3 Press SET UP TEXT to tune in the station.

To return to the previous display, press ↩ .

RDS (Radio Data System)

This feature allows your radio to receive RDS data.

■ Listening to stations of the same network

STEP 1 Press SET UP .

STEP 2 Turn SET UP TEXT to "RADIO" and press SET UP TEXT .

STEP 3 Turn SET UP TEXT as corresponds to the desired mode: "FM AF" or "Region code".

STEP 4 Press to select “ON” or “OFF”.

FM AF ON mode: The station among those of the same network with strong reception is selected.

Region code ON mode: The station among those of the same network with strong reception and broadcasting the same program is selected.

■ **Traffic information**

STEP 1 Press .

STEP 2 Turn to “RADIO” and press .

STEP 3 Turn to “FM TA” mode.

STEP 4 Press to select “ON” or “OFF”.

TP mode: The system automatically switches to traffic information when a broadcast with a traffic information signal is received.

The station returns to the previous one when the traffic information ends.

TA mode: The system automatically switches to traffic information when a broadcast with a traffic information signal is received. In FM modes, the system will be mute unless traffic information is being broadcast.

The audio system returns to the previous mode when the traffic information ends.

■ **Certification for the radio (for Italy)**

IL PRODUTTORE Panasonic Corporation Automotive Systems Company 4261, Ikonobe-cho, Tsuzuki-ku, Yokohama, 224-8520, JAPAN
DI QUESTO APPARECCHIO MODELLO 86120 52B00 DICHIARA CHE ESSO E'CONFORME AL D.M.28.08.1995 Nr.548, OTTEMPERANDO ALLE PRESCRIZIONI DI CUI AL D.M.25.6.1985 (PARAGRAFO 3,ALL.A) ED AL D.M.27.8.1987 (PARAGRAFO 3,ALL.I)

■ **EON (Enhanced Other Network) system (for traffic announcement function)**

If the RDS station (with EON data) you are listening to is not broadcasting a traffic information program and the audio system is in the TA (traffic announcement) mode, the radio will be switched automatically to a station broadcasting a traffic information program in the EON AF list when traffic information begins.

■ **When the battery is disconnected**

Stations presets are erased.

■ **Reception sensitivity**

- Maintaining perfect radio reception at all times is difficult due to the continually changing position of the antenna, differences in signal strength and surrounding objects, such as trains, transmitters, etc.
- The radio antenna is mounted on the rear roof. The antenna can be removed from the base by turning it.

■ **Digital Audio Broadcast (DAB) radio**

The optional radio antenna and tuner are necessary for the use of Digital Audio Broadcast (DAB) radio.

⚠ NOTICE

■ **To prevent damage, remove the antenna in the following cases.**

- The antenna will touch the ceiling of a garage.
- A cover will be put on the roof.

Using the CD player*

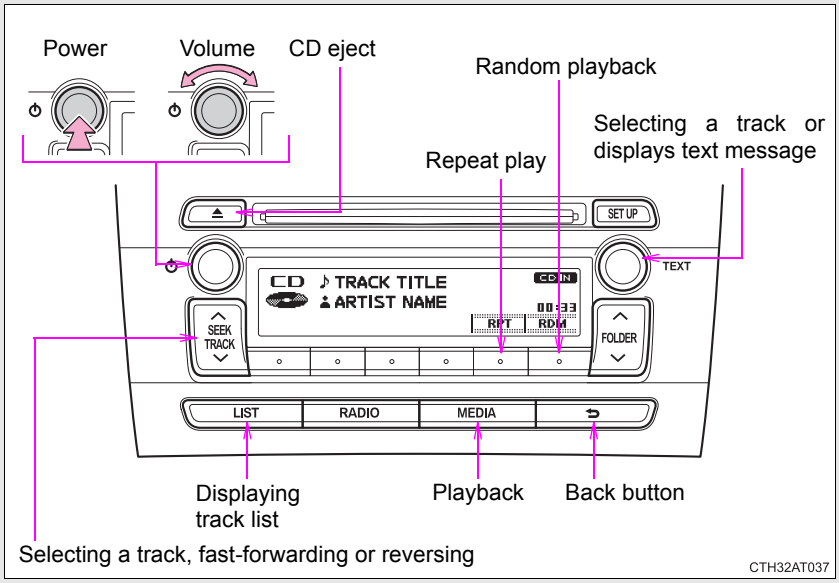

Loading CDs

Insert a CD.

Ejecting CDs

Press ⏏ and remove the CD.

Selecting a track

Turn SET UP / TEXT or press "∧" to move up or "∨" to move down using SEEK TRACK until the desired track number is displayed.

*: If equipped

Selecting a track from a track list

STEP 1 Press LIST .

The track list will be displayed.

STEP 2 Turn and press SETUP TEXT to select a track.

To return to the previous display, press LIST or ⮌ .

Fast-forwarding and reversing tracks

To fast-forward or reverse, press and hold "∧" or "∨" on SEEK TRACK .

Repeat play

Press ○ (RPT).

The current track is played repeatedly until ○ (RPT) is pressed again.

Random playback

Press ○ (RDM).

Tracks are played in a random order until ○ (RDM) is pressed again.

Switching the display

Press

.

Track name, Artist name and CD title are shown on the display.

To return to the previous display, press

or 
.

■ Display

Up to 24 characters can be displayed.

Depending on the contents recorded, the characters may not be displayed properly or may not be displayed at all.

■ Error messages

“ERROR”: This indicates a problem either in the CD or inside the player.

“CD CHECK”: The CD may be dirty, damaged or inserted up-side down.

“WAIT”: Operation has stopped due to a high temperature inside the player. Wait for a while and then press MEDIA. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional if the CD still cannot be played.

■ Discs that can be used

Discs with the marks shown below can be used.
Playback may not be possible depending on recording format or disc features, or due to scratches, dirt or deterioration.

CDs with copy-protect features may not be used.

■ **CD player protection feature**

To protect the internal components, playback is automatically stopped when a problem is detected while the CD player is being used.

■ **If a CD is left inside the CD player or in the ejected position for extended periods**

The CD may be damaged and may not play properly.

■ **Lens cleaners**

Do not use lens cleaners. Doing so may damage the CD player.

CAUTION

■ **Certification for the CD player**

This product is a class I laser product.

- A laser beam leak may result in hazardous radiation exposure.
- Do not open the cover of the player or attempt to repair the unit yourself. Refer servicing to qualified personnel.
- Laser power: No hazardous

NOTICE

■ **CDs and adapters that cannot be used**

Do not use the following types of CDs. Also, do not use 8 cm (3 in.) CD adapters, DualDiscs or printable discs.
Doing so may damage the CD player and/or the CD insert/eject function.



- CDs that have a diameter that is not 12 cm (4.7 in.)

NOTICE



- Low-quality and deformed CDs



- CDs with a transparent or translucent recording area



- CDs that have had tape, stickers or CD-R labels attached to them, or that have had the label peeled off

CD player precautions

Failure to follow the precautions below may result in serious damage to the CDs or the player itself.

- Do not insert anything other than CDs into the CD slot.
- Do not apply oil to the CD player.
- Store CDs away from direct sunlight.
- Never try to disassemble any part of the CD player.

Playing back MP3 and WMA discs*

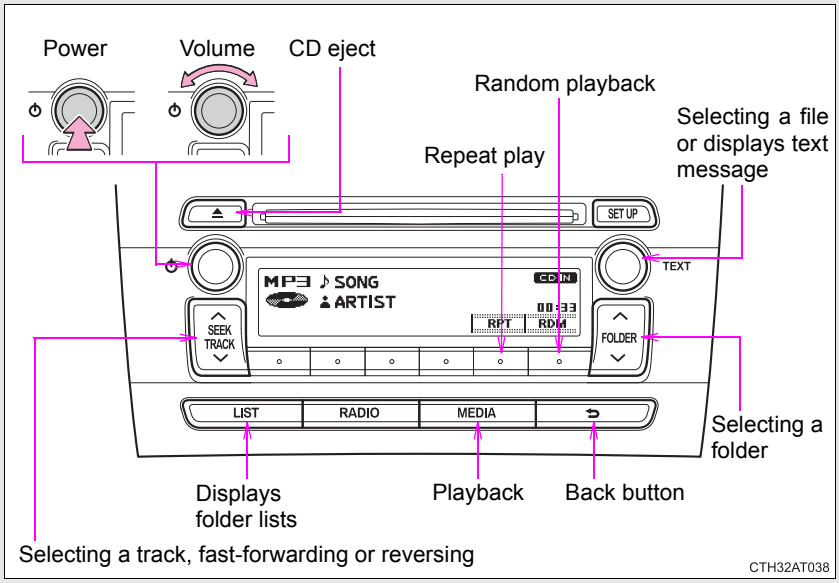

Loading and ejecting MP3 and WMA discs

→P. 296

Selecting a folder

To select the desired folder, press "∧" or "∨" on

.

To return to the first folder, press and hold "∨" on

until you hear a beep.

*: If equipped

■ Selecting a folder and file from folder lists

STEP 1 Press LIST .

The folder list will be displayed.

STEP 2 Turn and press SET UP TEXT to select a folder and a file.

To return to the previous display, press ⮌ .

To exit, press LIST .

Selecting files

Turn SET UP TEXT or press "∧" or "∨" on SEEK TRACK to select the desired file.

Fast-forwarding and reversing files

To fast-forward or reverse, press and hold "∧" or "∨" on SEEK TRACK .

Repeat play

Pressing ○ (RPT) changes modes in the following order:

File repeat → Folder repeat* → Off.

*: Available except when RDM (random playback) is selected

Random playback

Pressing (RDM) changes modes in the following order:

Folder random → Disc random → Off.

Switching the display

Press .

Track title, Artist name and Album title (MP3 only) are shown on the display.

To return to the previous display, press or .

■ **Display**

Up to 24 characters can be displayed.

Depending on the contents recorded, the characters may not be displayed properly or may not be displayed at all.

■ **Canceling random and repeat playback**

Press (RPT) or (RDM), or press and hold “∨” on FOLDER .

■ **Error messages**

“ERROR”: This indicates a problem either in the CD or inside the player.

“CD CHECK”: The CD may be dirty, damaged or inserted up-side down.

“NO SUPPORT”: This indicates that the MP3/WMA file is not included in the CD.

■ **Discs that can be used**

Discs with the marks shown below can be used.
Playback may not be possible depending on recording format or disc features, or due to scratches, dirt or deterioration.

■ **CD player protection feature**

To protect the internal components, playback is automatically stopped when a problem is detected while the CD player is being used.

■ **If a CD is left inside the CD player or in the ejected position for extended periods**

The CD may be damaged and may not play properly.

■ **Lens cleaners**

Do not use lens cleaners. Doing so may damage the CD player.

■ **MP3 and WMA files**

MP3 (MPEG Audio LAYER3) is a standard audio compression format.

Files can be compressed to approximately 1/10 of their original size by using MP3 compression.

WMA (Windows Media Audio) is a Microsoft audio compression format.

This format compresses audio data to a size smaller than that of the MP3 format.

There is a limit to the MP3 and WMA file standards and to the media/formats recorded by them that can be used.

● MP3 file compatibility

- Compatible standards
  MP3 (MPEG1 LAYER3, MPEG2 LSF LAYER3)
- Compatible sampling frequencies
  MPEG1 LAYER3: 32, 44.1, 48 (kHz)
  MPEG2 LSF LAYER3: 16, 22.05, 24 (kHz)
- Compatible bit rates
  MPEG1 LAYER3: 64, 80, 96, 112, 128, 160, 192, 224, 256, 320 (kbps)
  MPEG2 LSF LAYER3: 64, 80, 96, 112, 128, 144, 160 (kbps)
  * Compatible with VBR
- Compatible channel modes: stereo, joint stereo, dual channel and monaural

● WMA file compatibility

- Compatible standards
  WMA Ver. 7, 8, 9
- Compatible sampling frequencies
  32, 44.1, 48 (kHz)
- Compatible bit rates
  Ver. 7, 8: CBR 48, 64, 80, 96, 128, 160, 192 (kbps)
  Ver. 9: CBR 48, 64, 80, 96, 128, 160, 192, 256, 320 (kbps)
  * Only compatible with 2-channel playback

- Compatible media

  Media that can be used for MP3 and WMA playback are CD-Rs and CD-RWs.

  Playback in some instances may not be possible, depending on the status of the CD-R or CD-RW. Playback may not be possible or the audio may jump if the disc is scratched or marked with fingerprints.

- Compatible disc formats

  The following disc formats can be used.

  - Disc formats: CD-ROM Mode 1 and Mode 2
    CD-ROM XA Mode 2, Form 1 and Form 2
  - File formats: ISO9660 Level 1, Level 2, (Romeo, Joliet)
    MP3 and WMA files written in any format other than those listed above may not play correctly, and their file names and folder names may not be displayed correctly.

  Items related to standards and limitations are as follows.

  - Maximum directory hierarchy: 8 levels
  - Maximum length of folder names/file names: 32 characters
  - Maximum number of folders: 192 (including the root)
  - Maximum number of files per disc: 255

- File names

  The only files that can be recognized as MP3/WMA and played are those with the extension .mp3 or .wma.

- Multi-sessions

  As the audio system is compatible with multi-sessions, it is possible to play discs that contain MP3 and WMA files. However, only the first session can be played.

- ID3 and WMA tags

  ID3 tags can be added to MP3 files, making it possible to record the track title, artist name, etc.

  The system is compatible with ID3 Ver. 1.0, 1.1, and Ver. 2.2, 2.3 ID3 tags. (The number of characters is based on ID3 Ver. 1.0 and 1.1.)

  WMA tags can be added to WMA files, making it possible to record the track title and artist name in the same way as with ID3 tags.

● MP3 and WMA playback

When a disc containing MP3 or WMA files is inserted, all files on the disc are first checked. Once the file check is finished, the first MP3 or WMA file is played. To make the file check finish more quickly, we recommend you do not write in any files other than MP3 or WMA files or create any unnecessary folders.

If the discs contain a mixture of music data and MP3 or WMA format data, only music data can be played.

● Extensions

If the file extensions .mp3 and .wma are used for files other than MP3 and WMA files, they will be mistakenly recognized and played as MP3 and WMA files. This may result in large amounts of interference and damage to the speakers.

● Playback

- To play MP3 files with steady sound quality, we recommend a fixed bit rate of 128 kbps and a sampling frequency of 44.1 kHz.
- CD-R or CD-RW playback may not be possible in some instances, depending on the characteristics of the disc.
- There is a wide variety of freeware and other encoding software for MP3 and WMA files on the market, and depending on the status of the encoding and the file format, poor sound quality or noise at the start of playback may result. In some cases, playback may not be possible at all.
- When files other than MP3 or WMA files are recorded on a disc, it may take more time to recognize the disc and in some cases, playback may not be possible at all.
- Microsoft, Windows, and Windows Media are the registered trademarks of Microsoft Corporation in the U.S. and other countries.

NOTICE

■ **CDs and adapters that cannot be used (→P. 299)**

■ **CD player precautions (→P. 300)**

Operating an iPod*

Connecting an iPod enables you to enjoy music from the vehicle speakers.

■ Connecting an iPod

STEP 1

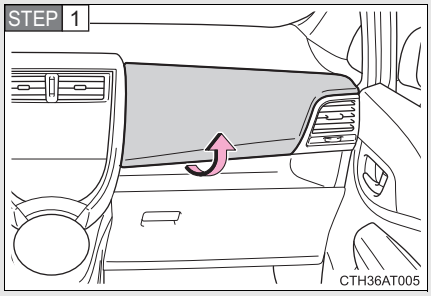

Open the auxiliary box.

STEP 2

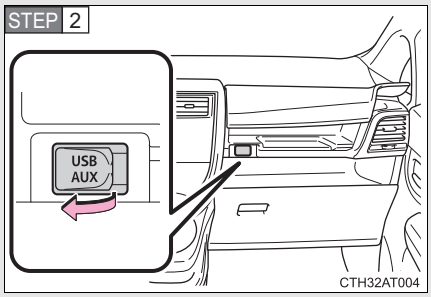

Open the cover and connect an iPod using an iPod cable.

Turn on the power of the iPod if it is not turned on.

STEP 3 Close the auxiliary box and press MEDIA .

*: If equipped

■ Control panel

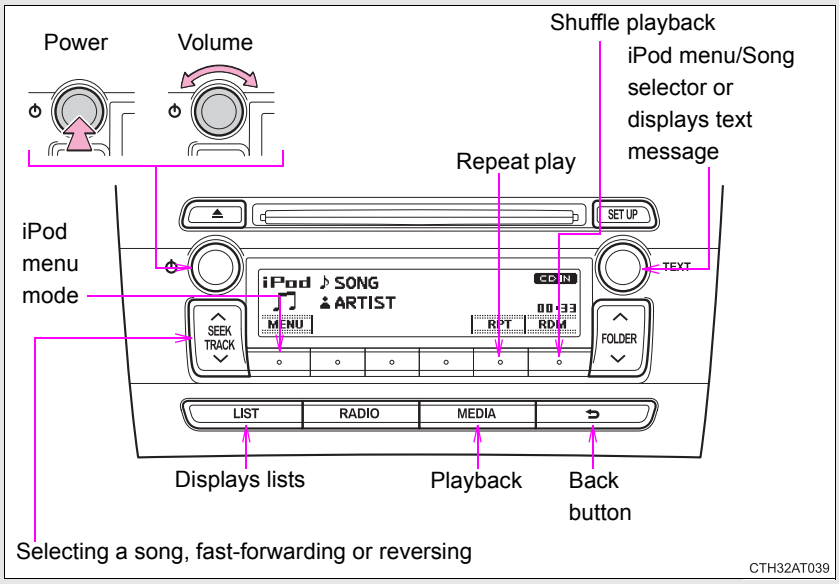

Selecting a play mode

STEP 1 Press (MENU) to select iPod menu mode.

STEP 2 Turning clockwise changes the play mode in the following order:

“Playlists”→“Artists”→“Albums”→“Songs”→“Podcasts”→“Genres”→“Composers”→“Audiobooks”

STEP 3 Press to select the desired play mode.

■ Play mode list

Play mode	First selection	Second selection	Third selection	Fourth selection
“Playlists”	Playlists select	Songs select	-	-
“Artists”	Artists select	Albums select	Songs select	-
“Albums”	Albums select	Songs select	-	-
“Songs”	Songs select	-	-	-
“Podcasts”	Podcasts select	Episodes select	-	-
“Genres”	Genre select	Artists select	Albums select	Songs select
“Composers”	Composers select	Albums select	Songs select	-
“Audiobooks”	Audiobooks select	Chapters select	-	-

■ Selecting a list

STEP 1 Turn to display the first selection list.

STEP 2 Press to select the desired item.

Pressing the knob changes to the second selection list.

STEP 3 Repeat the same procedure to select the desired item.

To return to the previous selection list, press  .

Selecting songs

Turn

or press “∧” or “∨” on

to select the desired song.

Selecting a song from the song list

STEP 1 Press

.

The song list will be displayed.

STEP 2 Turn

to select a song.

STEP 3 Press

to play the song.

To return to the previous display, press 
.

Fast-forwarding and reversing songs

To fast-forward or reverse, press and hold “∧” or “∨” on

.

Shuffle playback

Pressing (RDM) changes modes in the following order:
Track shuffle → Album shuffle → Off.

Repeat play

Press (RPT).

To cancel, press (RPT) again.

Switching the display

Press .

Track title, Artist name and Album title are shown on the display.

To return to the previous display, press or .

Adjusting sound quality and volume balance

STEP 1 Press SET UP to enter iPod menu mode.

STEP 2 Turning changes sound modes. (→P. 324)

■ **About iPod**

- Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.
- iPod is a trademark of Apple Inc., registered in the U.S. and other countries.

■ **iPod functions**

- When an iPod is connected and the audio source is changed to iPod mode, the iPod will resume play from the same point in which it was last used.
- Depending on the iPod that is connected to the system, certain functions may not be available. If a function is unavailable due to a malfunction (as opposed to a system specification), disconnecting the device and reconnecting it once again may resolve the problem.
- While connected to the system, the iPod cannot be operated with its own controls. It is necessary to use the controls of the vehicle's audio system instead.

■ **iPod problems**

To resolve most problems encountered when using your iPod, disconnect your iPod from the vehicle iPod connection and reset it.
For instructions on how to reset your iPod, refer to your iPod Owner's Manual.

■ **Display**

→P. 298

■ **Error messages**

"ERROR":	This indicates a problem in the iPod or its connection.
"NO SONGS":	This indicates that there is no music data in the iPod.
"NO PLAYLISTS":	This indicates that some available songs are not found in a selected playlist.
"UPDATE YOUR IPOD":	This indicates that the version of the iPod is not compatible. Upgrade your iPod software to the latest version.

■ **Compatible models**

Model	Generation	Software version
iPod	5th generation	Ver. 1.3.0 or higher
iPod nano	1st generation	Ver. 1.3.1 or higher
	2nd generation	Ver. 1.1.3 or higher
	3rd generation	Ver. 1.1.3 or higher
	4th generation	Ver. 1.0.4 or higher
	5th generation	Ver. 1.0.1 or higher
iPod touch	1st generation	Ver. 3.1.2 or higher
	2nd generation	Ver. 3.1.2 or higher
	Late 2009 (8 GB)	Ver. 3.1.2 or higher
	Late 2009 (32 GB/64 GB)	Ver. 3.1.2 or higher
iPod classic	1st generation	Ver. 1.1.2 or higher
	2nd generation (120 GB)	Ver. 2.0.1 or higher
	Late 2009 (160 GB)	Ver. 2.0.3 or higher
iPhone	1st generation (iPhone)	Ver. 3.1.2 or higher
	2nd generation (iPhone 3G)	Ver. 3.1.2 or higher
	3rd generation (iPhone 3GS)	Ver. 3.1.2 or higher
	4th generation (iPhone 4)	Ver. 4.0.0 or higher

Depending on differences between models or software version etc., some models listed above might be incompatible with this system.
iPod 4th generation and earlier models are not compatible with this system.
iPod mini, iPod shuffle and iPod photo are not compatible with this system.

Items related to standards and limitations are as follows:

- Maximum number of lists in device: 9999
- Maximum number of songs in device: 65535
- Maximum number of songs per list: 65535

CAUTION

Caution while driving

Do not connect iPod or operate the controls.

NOTICE

To prevent damage to iPod

- Do not leave iPod in the vehicle. The temperature inside the vehicle may become high, resulting in damage to the iPod.
- Do not push down on or apply unnecessary pressure to the iPod while it is connected as this may damage the iPod or its terminal.
- Do not insert foreign objects into the port as this may damage the iPod or its terminal.

Operating a USB memory*

Connecting a USB memory enables you to enjoy music from the vehicle speakers.

■ Connecting a USB memory

STEP 1

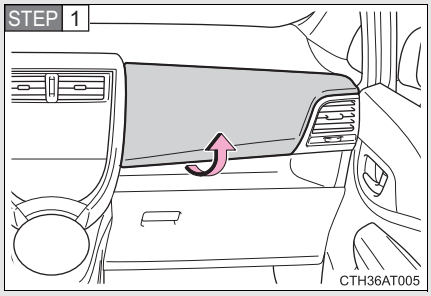

Open the auxiliary box.

STEP 2

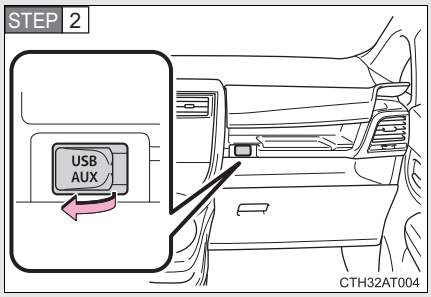

Open the cover and connect a USB memory.

Turn on the power of the USB memory if it is not turned on.

STEP 3 Close the auxiliary box and press MEDIA.

*: If equipped

Control panel

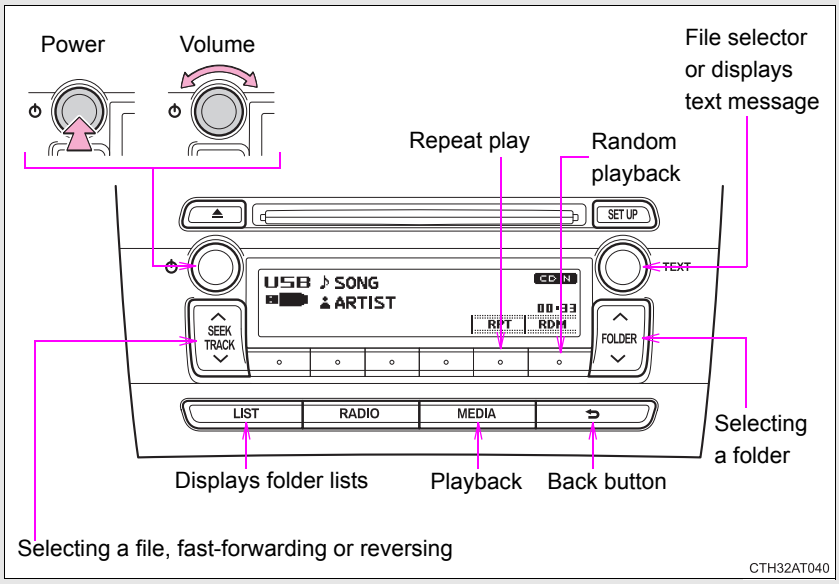

Selecting a folder

Selecting folders one at a time

Press “∧” or “∨” on to select the desired folder.

Selecting from folder lists

STEP 1 Press .

The folder list will be displayed.

STEP 2 Turn and press to select a folder and a file.

To return to the previous display, press  .

■ Returning to the first folder

Press and hold "∨" on FOLDER until you hear a beep.

Selecting files

Turn SETUP TEXT or press "∧" or "∨" on SEEK TRACK to select the desired file.

Fast-forwarding and reversing files

To fast-forward or reverse, press and hold "∧" or "∨" on SEEK TRACK .

Random playback

Pressing (RDM) changes modes in the following order:
Folder random → Disc random → Off.

Repeat play

Pressing (RPT) changes modes in the following order:
File repeat → Folder repeat* → Off.

*: Available except when RDM (random playback) is selected

Switching the display

Press

.

Track title, Artist name and Album title (MP3 only) are displayed on the display.

To return to the previous display, press

or 
.

■ **USB memory functions**

- Depending on the USB memory that is connected to the system, the device itself may not be operable and certain functions may not be available. If the device is inoperable or a function is unavailable due to a malfunction (as opposed to a system specification), disconnecting the device and reconnecting it once again may resolve the problem.
- If the USB memory still does not begin operation after being disconnected and reconnected, format the memory.

■ **Display**

→P. 298

■ **Error messages**

“ERROR”: This indicates a problem in the USB memory or its connection.

“NO MUSIC”: This indicates that no MP3/WMA files are included in the USB memory.

USB memory

- Compatible devices

  USB memory that can be used for MP3 and WMA playback

- Compatible device formats

  The following device formats can be used:

  - USB communication formats: USB2.0 FS (12 mbps)
  - File formats: FAT16/32 (Windows)
  - Correspondence class: Mass storage class

  MP3 and WMA files written in any format other than those listed above may not play correctly, and their file names and folder names may not be displayed correctly.

  Items related to standards and limitations are as follows:

  - Maximum directory hierarchy: 8 levels
  - Maximum number of folders in a device: 999 (including the root)
  - Maximum number of files in a device: 9999
  - Maximum number of files per folder: 255

- MP3 and WMA files

  MP3 (MPEG Audio LAYER 3) is a standard audio compression format.

  Files can be compressed to approximately 1/10 of their original size using MP3 compression.

  WMA (Windows Media Audio) is a Microsoft audio compression format.

  This format compresses audio data to a size smaller than that of the MP3 format.

  There is a limit to the MP3 and WMA file standards that can be used and to the media/formats on which the files are recorded.

- MP3 file compatibility
  - Compatible standards
    MP3 (MPEG1 AUDIO LAYERII, III, MPEG2 AUDIO LAYERII, III, MPEG2.5)
  - Compatible sampling frequencies
    MPEG1 AUDIO LAYERII, III: 32, 44.1, 48 (kHz)
    MPEG2 AUDIO LAYERII, III: 16, 22.05, 24 (kHz)
    MPEG2.5: 8, 11.025, 12 (kHz)
  - Compatible bit rates (compatible with VBR)
    MPEG1 AUDIO LAYERII, III: 32-320 (kbps)
    MPEG2 AUDIO LAYERII, III: 32-160 (kbps)
    MPEG2.5: 32-160 (kbps)
  - Compatible channel modes: stereo, joint stereo, dual channel and monaural
- WMA file compatibility
  - Compatible standards
    WMA Ver. 9
  - Compatible sampling frequencies
    HIGH PROFILE 32, 44.1, 48 (kHz)
  - Compatible bit rates
    HIGH PROFILE 32-320 (kbps, VBR)
- File names

  The only files that can be recognized as MP3/WMA and played are those with the extension .mp3 or .wma.
- ID3 and WMA tags

  ID3 tags can be added to MP3 files, making it possible to record the track title, artist name, etc.

  The system is compatible with ID3 Ver. 1.0, 1.1, and Ver. 2.2, 2.3, 2.4 ID3 tags. (The number of characters is based on ID3 Ver. 1.0 and 1.1.)

  WMA tags can be added to WMA files, making it possible to record the track title and artist name in the same way as with ID3 tags.

- MP3 and WMA playback
  - When a device containing MP3 or WMA files is connected, all files in the USB memory are checked. Once the file check is finished, the first MP3 or WMA file is played. To make the file check finish more quickly, we recommend that you do not include any files other than MP3 or WMA files or create any unnecessary folders.
  - When the USB memory is connected and the audio source is changed to USB memory mode, the USB memory will start playing the first file in the first folder. If the same device is removed and reinserted (and the contents have not been changed), the USB memory will resume play from the same point in which it was last used.
- Extensions

  If the file extensions .mp3 and .wma are used for files other than MP3 and WMA files, they will be skipped (not played).
- Playback
  - To play MP3 files with steady sound quality, we recommend a fixed bit rate of at least 128 kbps and a sampling frequency of 44.1 kHz.
  - There is a wide variety of freeware and other encoding software for MP3 and WMA files on the market, and depending on the status of the encoding and the file format, poor sound quality or noise at the start of playback may result. In some cases, playback may not be possible at all.
  - Microsoft, Windows, and Windows Media are registered trademarks of Microsoft Corporation in the U.S.A. and other countries.

CAUTION

Caution while driving

Do not connect USB memory or operate the controls.

NOTICE

■ **If the auxiliary box lid cannot be fully closed**

Depending on the size and shape of the USB memory that is connected to the system, the auxiliary box lid may not close fully. In this case, do not forcibly close the lid as this may damage the USB memory or the terminal, etc.

■ **To prevent damage to USB memory**

- Do not leave USB memory in the vehicle. The temperature inside the vehicle may become high, resulting in damage to the player.
- Do not push down on or apply unnecessary pressure to the USB memory while it is connected as this may damage the USB memory or its terminal.
- Do not insert foreign objects into the port as this may damage the USB memory or its terminal.

Optimal use of the audio system*

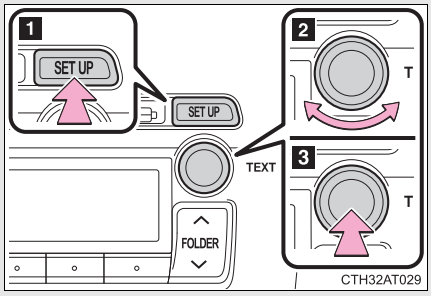

1 Displays the current mode

2 Changes the following setting

- Sound quality and volume balance (→P. 325)

  The sound quality and balance setting can be changed to produce the best sound.

- Automatic Sound Levelizer ON/OFF (→P. 325)

3 Selecting the mode

Using the audio control function

■ Changing sound quality modes

STEP 1 Press SET UP .

STEP 2 Turn to select “Sound Setting”.

STEP 3 Press .

STEP 4 Turn as corresponds to the desired mode.

“BASS”, “TREBLE”, “FADER”, “BALANCE”, or “ASL”

STEP 5 Press .

*: If equipped

Adjusting sound quality

Turning adjusts the level.

Sound quality mode	Mode displayed	Level	Turn to the left	Turn to the right
Bass*	“BASS”	-5 to 5	Low	High
Treble*	“TREBLE”	-5 to 5		
Front/rear volume balance	“FADER”	F7 to R7	Shifts to rear	Shifts to front
Left/right volume balance	“BALANCE”	L7 to R7	Shifts to left	Shifts to right

*: The sound quality level is adjusted individually in each audio mode.

Adjusting the Automatic Sound Levelizer (ASL)

When ASL is selected, turning to the right changes the amount of ASL in the order of LOW, MID and HIGH.

Turning to the left turns ASL off.

ASL automatically adjusts the volume and tone quality according to vehicle speed.

Using the AUX port*

This port can be used to connect a portable audio device and listen to it through the vehicle's speakers.

STEP 1

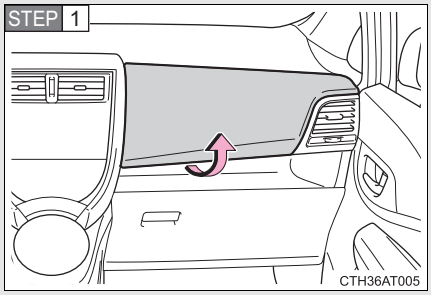

Open the auxiliary box.

STEP 2

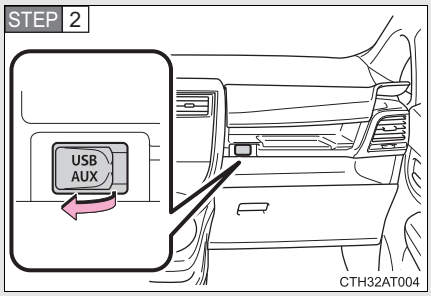

Open the cover and connect the portable audio device.

STEP 3 Close the auxiliary box and press MEDIA until "AUX" is displayed.

■ **Operating portable audio devices connected to the audio system**

The volume can be adjusted using the vehicle's audio controls. All other adjustments must be made on the portable audio device itself.

■ **When using a portable audio device connected to the power outlet**

Noise may occur during playback. Use the power source of the portable audio device.

*: If equipped

Using the steering wheel audio switches*

Some audio features can be controlled using the switches on the steering wheel.

Operation may differ depending on the type of audio system or navigation system. For details, refer to the manual provided with the audio system or navigation system.

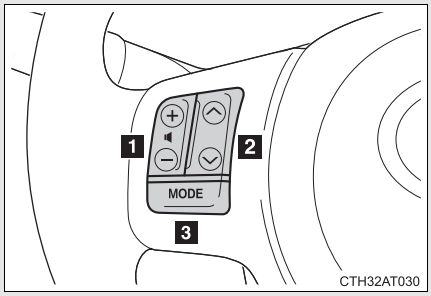

1 Volume

2 Radio mode: Select radio stations

CD mode: Select tracks and files (MP3 and WMA)

iPod mode: Selects a song

USB memory mode: Selects a file and folder

3 Power on, select audio source

Turning on the power

Press MODE when the audio system is turned off.

Changing the audio source

Press MODE when the audio system is turned on. The audio source changes as follows each time MODE is pressed.

AM→FM→CD mode→iPod or USB memory mode*→AUX*→AM

*: If equipped

*: If equipped

Adjusting the volume

Press “+” on to increase the volume and “-” to decrease the volume.

Hold down “+” or “-” on to continue increasing or decreasing the volume.

Silencing a sound

Press and hold MODE.

To cancel, press and hold MODE again.

Selecting a radio station

STEP 1 Press MODE to select the radio mode.

STEP 2 Press “∧” or “∨” on to select a preset station.

To scan for receivable stations, press and hold “∧” or “∨” on until you hear a beep.

Selecting a track/file or song

STEP 1 Press MODE to select CD, iPod or USB memory mode.

STEP 2 Press “∧” or “∨” on to select the desired track/file or song.

Selecting a folder (MP3 and WMA or USB memory)

STEP 1 Press MODE to select CD or USB memory mode.

STEP 2 Press and hold “∧” or “∨” on until you hear a beep.

CAUTION

■ **To reduce the risk of an accident**

Exercise care when operating the audio switches on the steering wheel.

Interior lights list

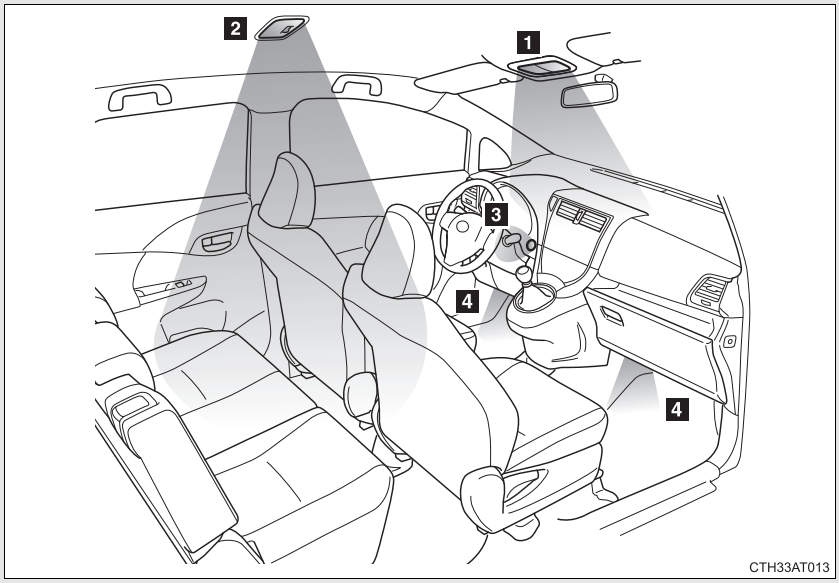

1 Personal/interior lights (vehicles with a panoramic roof shade) or personal lights (vehicles without a panoramic roof shade) (→P. 331)

2 Interior light (→P. 332)

3 “ENGINE START STOP” switch light (vehicles with a smart entry & start system)

4 Footwell lights

Personal lights (vehicles without a panoramic roof shade)

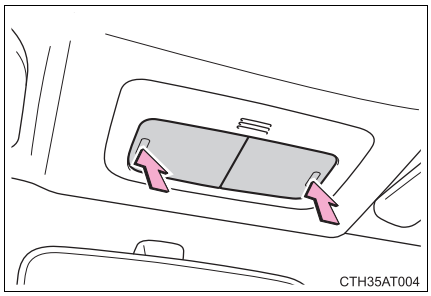

Turns the lights on/off

Personal/interior lights (vehicles with a panoramic roof shade)

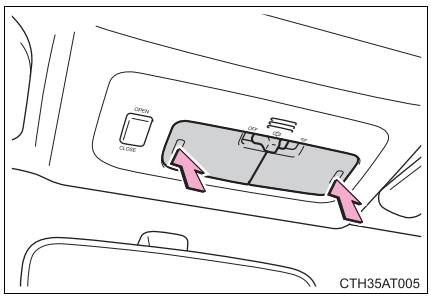

Turns the lights on/off

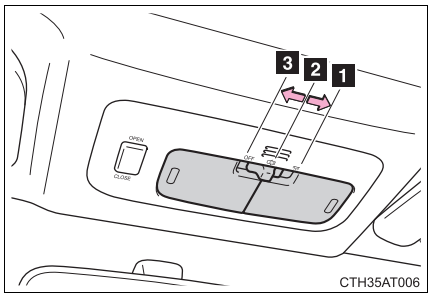

1 Turns the lights on
2 Turns the door position on
3 Turns the lights off

Interior light

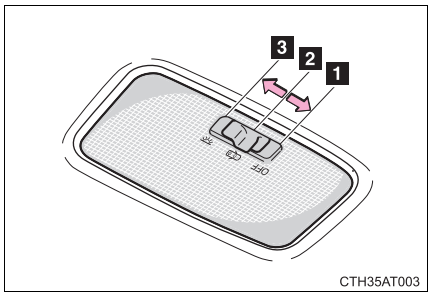

1 Turn the light off
2 Turn the door position on
3 Turn the light on

■ **Illuminated entry system**

Vehicles without a smart entry & start system
The lights automatically turn on/off according to the engine switch position, whether the doors are locked/unlocked, and whether the doors are open/closed.

Vehicles with a smart entry & start system
The lights automatically turn on/off according to “ENGINE START STOP” switch mode, the presence of the electronic key, whether the doors are locked/unlocked, and whether the doors are open/closed.

■ **To prevent battery discharge**

If the following lights remain on when the door is not fully closed, the lights will go off automatically after 20 minutes:

- Personal/interior lights (when the switch is in the door position)
- Interior light (when the switch is in the door position)
- “ENGINE START STOP” switch light
- Footwell lights

■ **Customization that can be configured at any authorized Toyota dealer or repair, or another duly qualified and equipped professional**

Settings (e.g. the time elapsed before lights turn off) can be changed.
(Customizable features →P. 536)

List of storage features

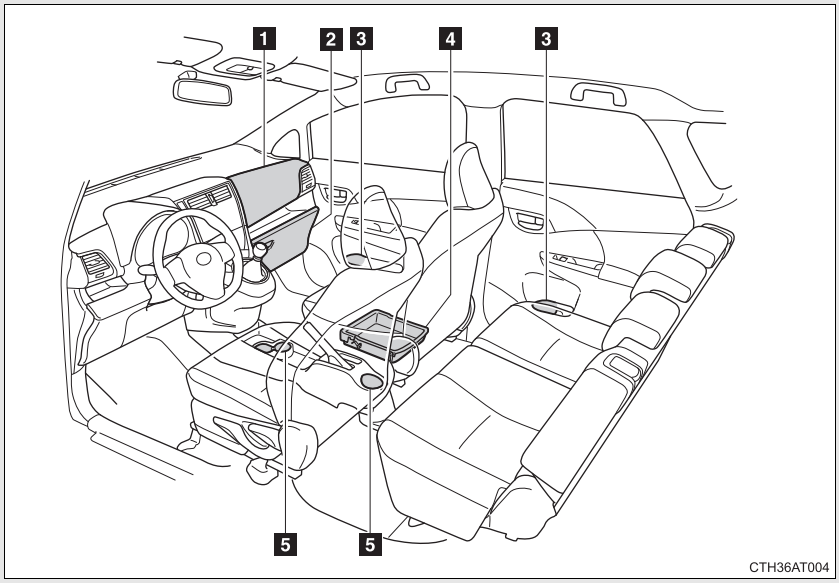

1 Auxiliary box
2 Glove box
3 Bottle holders
4 Tray (if equipped)
5 Cup holders

CAUTION

■ Items that should not be left in the storage spaces

Do not leave glasses, lighters or spray cans in the storage spaces, as this may cause the following when cabin temperature becomes high:

- Glasses may be deformed by heat or cracked if they come into contact with other stored items.
- Lighters or spray cans may explode. If they come into contact with other stored items, the lighter may catch fire or the spray can may release gas, causing a fire hazard.

Auxiliary box

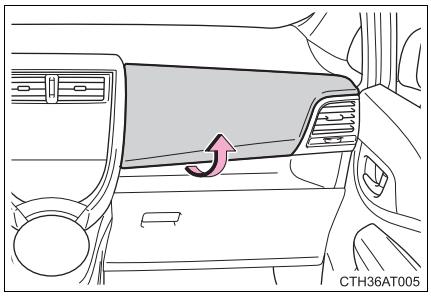

Pull up the lid.

CAUTION

Caution while driving

Keep the auxiliary box closed. In the event of sudden braking, an accident may occur due to an occupant being struck by an open auxiliary box or the items stored inside.

Glove box

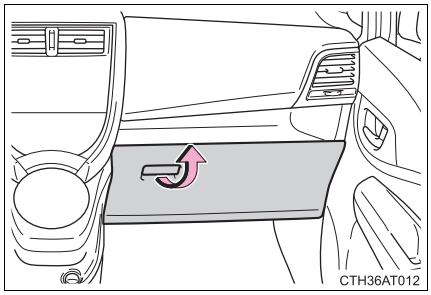

Pull up the lever to open the glove box.

Grocery bag hook



Close the glove box when using the grocery bag hook.

CAUTION

Caution while driving

Keep the glove box closed. In the event of sudden braking or sudden swerving, an accident may occur due to an occupant being struck by the open glove box or the items stored inside.

Precautions for using the grocery bag hook

- Make sure to close the glove box when using the grocery bag hook, as items hung on the hook may fall and injure an occupant in the event of sudden braking.
- Do not use the grocery bag hook to hold heavy or large items, as items hung on the hook may hit and injure an occupant in the event of sudden braking.

NOTICE

Grocery bag hook weight capacity

Do not hang any object heavier than 1 kg (2.2 lb.) on the grocery bag hook.

Bottle holders

Front

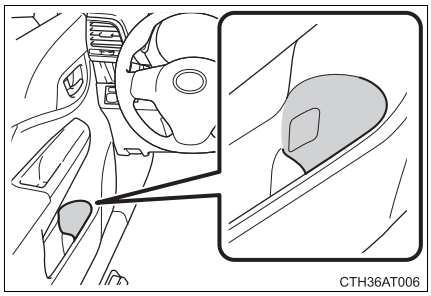

Rear

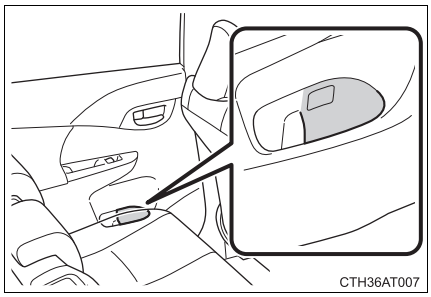

■ **When using the bottle holder**

- When storing a bottle, close the cap.
- The bottle may not be stored depending on its size or shape.

CAUTION

■ **Items unsuitable for the bottle holder**

Do not place anything other than a bottle in the bottle holders.
Other items may be thrown out of the holders in the event of an accident or sudden braking and cause injury.

NOTICE

Items that should not be stowed in the bottle holders

Put the cap on before stowing a bottle. Do not place open bottles in the bottle holders, or glasses and paper cups containing liquid. The contents may spill and glasses may break.

Tray (if equipped)

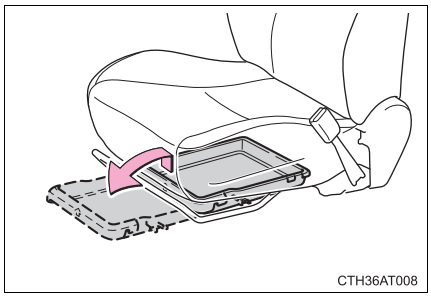

Lift the tray and pull it forward.

CAUTION

Caution while driving

Keep the tray to its stowed position. In the event of sudden braking, an accident may occur due to an occupant being struck by an open tray or the items stored inside.

Cup holders

Front

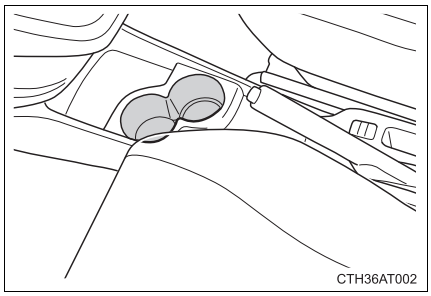

Rear

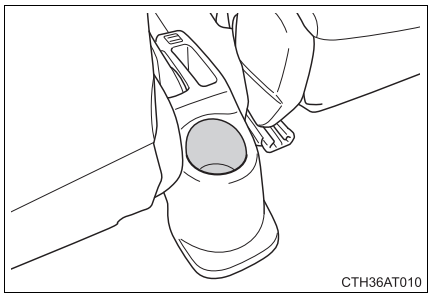

CAUTION

■ Items unsuitable for the cup holder

Do not place anything other than cups or aluminum cans in the cup holders. Other items may be thrown out of the holders in the event of an accident or sudden braking, causing injury. If possible, cover hot drinks to prevent burns.

Sun visors

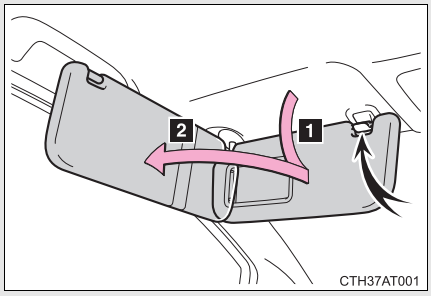

1 To set the visor in the forward position, flip it down.

2 To set the visor in the side position, flip down, unhook, and swing it to the side.

Vanity mirrors

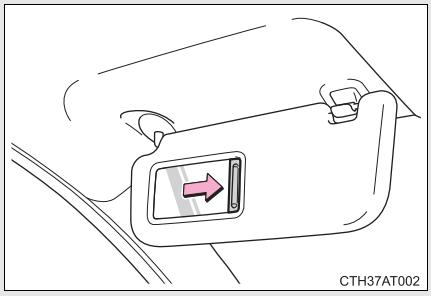

Slide the cover to open.

Clock

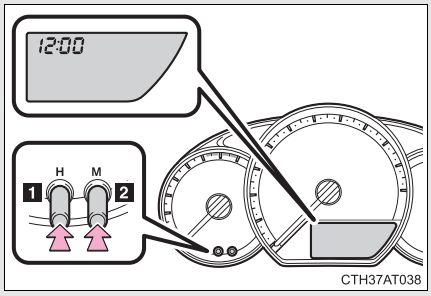

1 Adjusts the hours

2 Adjusts the minutes

■ **The clock is displayed when**

Vehicles without a smart entry & start system
The engine switch is in the “ON” position.

Vehicles with a smart entry & start system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **When disconnecting and reconnecting battery terminals**

The clock data will be reset.

Outside temperature display

The temperature display shows temperatures within the range of -40°C (-40°F) and 50°C (122°F).

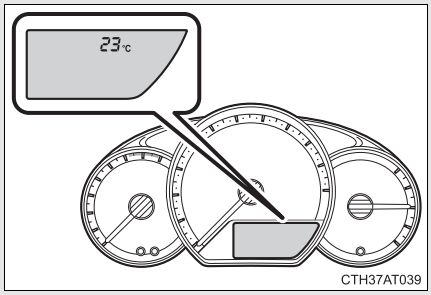

■ **The outside temperature is displayed when**

Vehicles without a smart entry & start system
The engine switch is in the “ON” position.

Vehicles with a smart entry & start system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Display**

In the following situations, the correct outside temperature may not be displayed, or the display may take longer than normal to change:

- When the vehicle is stopped, or moving at low speeds (less than 25 km/h [16 mph])
- When the outside temperature has changed suddenly (at the entrance/exit of a garage, tunnel, etc.)

■ **When “– –” or “E” is displayed**

The system may be malfunctioning. Take your vehicle to any authorized Toyota dealer or repairer, or another duly qualified professional.

Power outlets

Please use as a power supply for electronic goods that use less than 12 VDC/10 A (power consumption of 120 W). When using electronic goods, make sure that the power consumption of all the connected power outlets is less than 120 W.

Center console

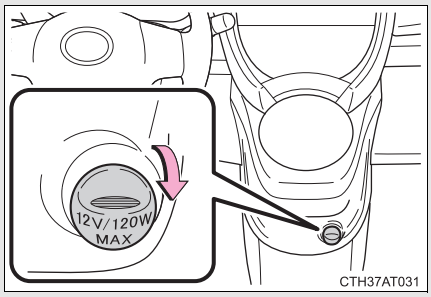

Luggage compartment

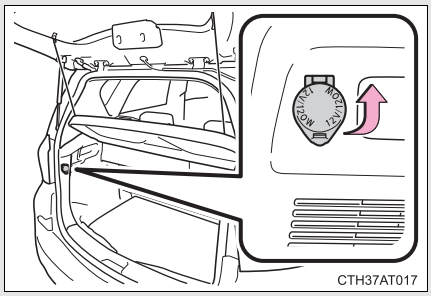

■ **The power outlet can be used when**

Vehicles without a smart entry & start system
The engine switch is in the “ACC” or “ON” position.

Vehicles with a smart entry & start system
The “ENGINE START STOP” switch is in ACCESSORY or IGNITION ON mode.

NOTICE

■ **To avoid damaging the power outlet**

Close the power outlet lid when the power outlet is not in use.
Foreign objects or liquids that enter the power outlet may cause a short circuit.

■ **To prevent battery discharge**

Do not use the power outlet longer than necessary when the engine is not running.

Seat heaters*

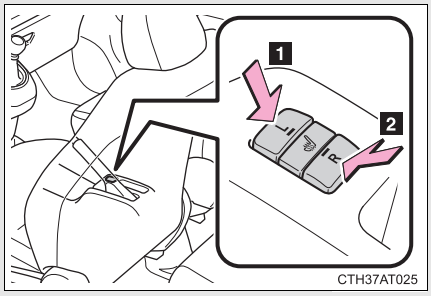

1 Heats the left front seat

2 Heats the right front seat

The indicator light comes on.

■ **The seat heaters can be used when**

Vehicles without a smart entry & start system
The engine switch is in the “ON” position.

Vehicles with a smart entry & start system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **When not in use**

Turn the seat heater off.

*: If equipped

CAUTION

Burns

- Use caution when seating the following persons in a seat with the seat heater on to avoid the possibility of burns:
  - Babies, small children, the elderly, the sick and the physically challenged
  - Persons with sensitive skin
  - Persons who are fatigued
  - Persons who have taken alcohol or drugs that induce sleep (sleeping drugs, cold remedies, etc.)
- Do not cover the seat with anything when using the seat heater.
  Using the seat heater with a blanket or cushion increases the temperature of the seat and may lead to overheating.
- Do not use the seat heater more than necessary. Doing so may cause minor burns or overheating.

NOTICE

To prevent seat heater damage

Do not put heavy objects that have an uneven surface on the seat and do not stick sharp objects (needles, nails, etc.) into the seat.

To prevent battery discharge

Turn the seat heaters off when the engine is not running.

Armrests*

Driver seat

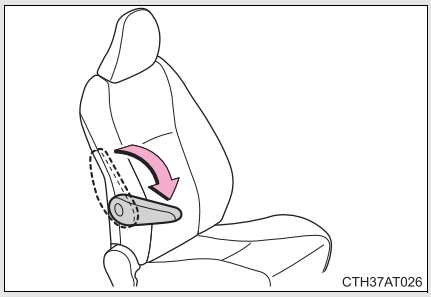

Fold down the armrest for use.

Rear seat

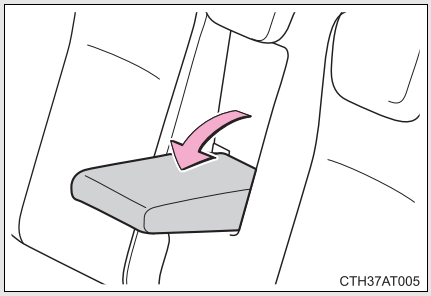

Fold down the armrest for use.

NOTICE

To prevent damage to the armrest

Do not apply too much load on the armrest.

*: If equipped

Panoramic roof shade*

Use the overhead switches to open or close the panoramic roof shade.

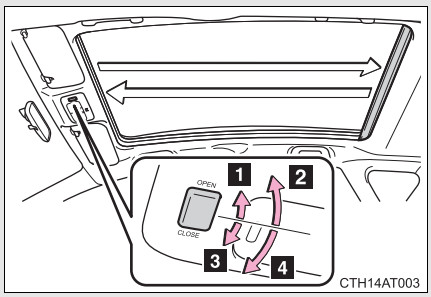

1 Opening
2 Automatic full-opening (press and hold)*
3 Closing
4 Automatic full-closing (press and hold)*

*: Pressing either side of the switch will stop the panoramic roof shade travel partway.

■ **The panoramic roof shade can be operated when**

Vehicles without a smart entry & start system
The engine switch is in the “ON” position.

Vehicles with a smart entry & start system
The “ENGINE START STOP” switch is in IGNITION ON mode.

■ **Jam protection function**

If an object is detected between the panoramic roof shade and the frame while closing, travel is stopped and the panoramic roof shade opens slightly.

*: If equipped

If the panoramic roof shade does not open/close automatically

STEP 1 Press the “OPEN” side of the switch to open the panoramic roof shade.

STEP 2 Press and hold the “OPEN” side of the switch until the panoramic roof shade opens fully and then closes slightly.

After this procedure is completed, check that the automatic opening/closing function is available.
If the automatic opening/closing function does not work properly, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

Closing the panoramic roof shade

Observe the following precautions.
Failing to do so may result in death or serious injury.

- Check to make sure that all passengers do not have any part of their body in a position where it could be caught when the panoramic roof shade is being operated.
- Do not allow children to operate the panoramic roof shade. Closing the panoramic roof shade on someone can cause death or serious injury. The driver is responsible for instructing children not to operate the panoramic roof shade.

Jam protection function

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets caught just before the panoramic roof shade fully closes.

CAUTION

To prevent burns or injury

Observe the following precautions.

- Although the jam protection function has been installed, make sure that passenger's hands and faces are not caught in the panoramic roof shade while it is closing. Also, as there is a chance that the jam protection function will not react just before closing, make sure not to catch fingers etc. in the roof shade.
- The opening or closing of the panoramic roof shade can be stopped by pressing the switch.
- If the panoramic roof shade will not close (for example, due to a malfunction in the jam protection function), the shade can be closed by pressing and holding the switch.
- The jam protection function may operate if a load or impact, similar to that applied when a foreign object is caught in the roof shade, is applied by environmental or driving conditions.
- The underside of the roof will become hot if the vehicle is left in the direct sunlight for a long period of time. Do not touch the parts inside the gap between the roof underside and the roof shade, as you may burn yourself.
- Do not touch any rough or sheared parts of the roof underside, as you may injure yourself.

Assist grips

An assist grip installed on the ceiling can be used to support your body while sitting on the seat.

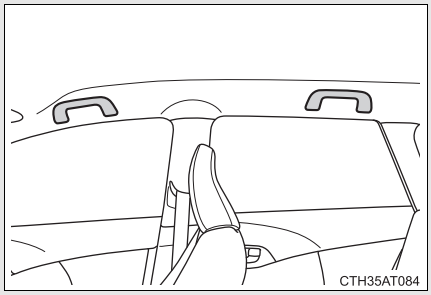

CAUTION

■ **Assist grip**

Do not use the assist grip when getting in or out of the vehicle or rising from your seat.

NOTICE

■ **To prevent damage to the assist grip**

Do not hang any heavy object or put a heavy load on the assist grip.

Floor mat

Use only floor mats designed specifically for vehicles of the same model and model year as your vehicle. Fix them securely in place onto the carpet.

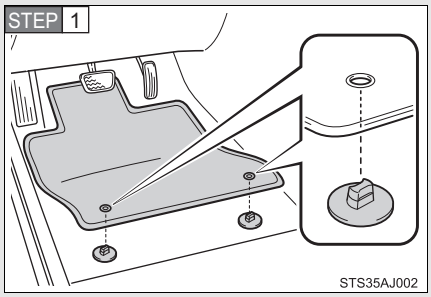

Insert the retaining hooks (clips) into the floor mat eyelets.

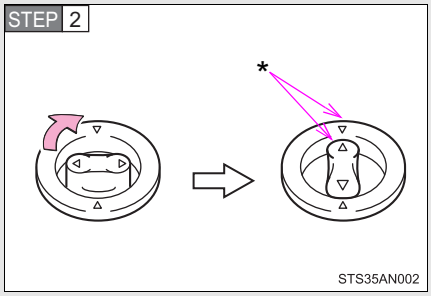

Turn the upper knob of each retaining hook (clip) to secure the floor mats in place.

*: Always align the Δ marks.

The shape of the retaining hooks (clips) may differ from that shown in the illustration.

CAUTION

Observe the following precautions.
Failure to do so may cause the driver's floor mat to slip, possibly interfering with the pedals while driving. An unexpectedly high speed may result or it may become difficult to stop the vehicle, leading to a serious accident.

■ **When installing the driver's floor mat**

- Do not use floor mats designed for other models or different model year vehicles, even if they are Toyota Genuine floor mats.
- Only use floor mats designed for the driver's seat.
- Always install the floor mat securely using the retaining hooks (clips) provided.
- Do not use two or more floor mats on top of each other.
- Do not place the floor mat bottom-side up or upside-down.

■ **Before driving**



- Check that the floor mat is securely fixed in the correct place with all the provided retaining hooks (clips). Be especially careful to perform this check after cleaning the floor.
- With the engine stopped and the shift lever in P (Multidrive) or N (multi-mode manual transmission or manual transmission), fully depress each pedal to the floor to make sure it does not interfere with the floor mat.

Cargo hooks

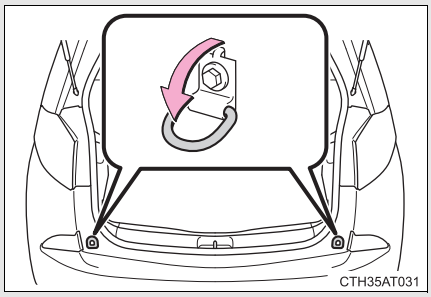

Pull the hook down to use.

The cargo hooks are provided for securing loose items.

Dual-level deck board (if equipped)

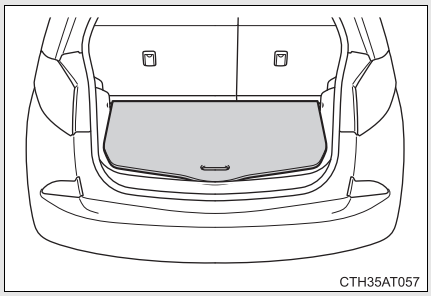

The position of the dual-level deck board can be changed (lowered/raised). (→P. 356)

Deck board

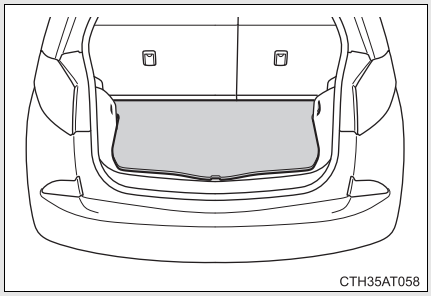

■ Auxiliary boxes (if equipped)

Type A

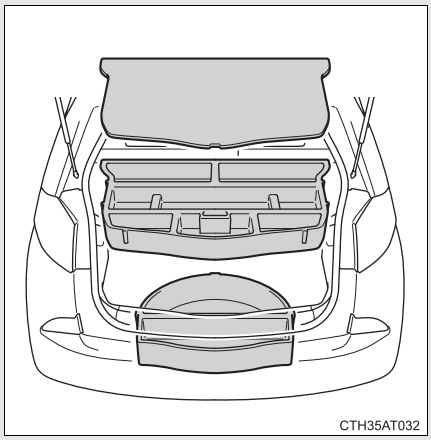

Type B

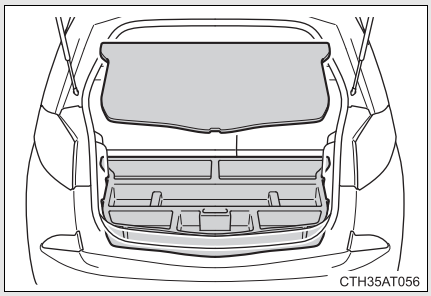

Operating the dual-level deck board

Lowering the dual-level deck board

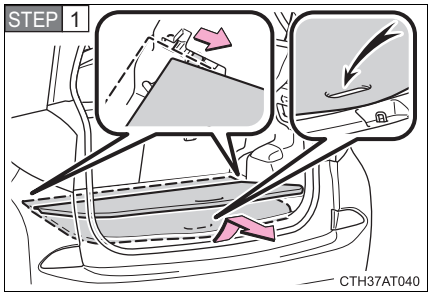

Lift the dual-level deck board and pull it toward you.

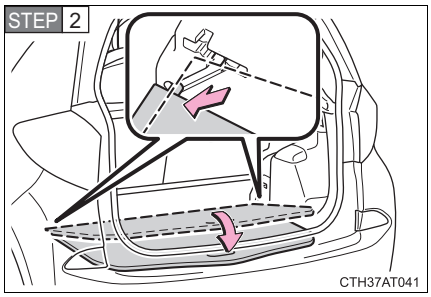

Lower the dual-level deck board along the groove and then close the board.

■ Removing the dual-level deck board

Before removing, raise the dual-level deck board to the upper position. If it is in the lower position, the board cannot be removed.

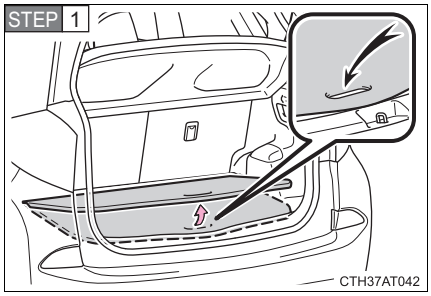

Lift the dual-level deck board up.

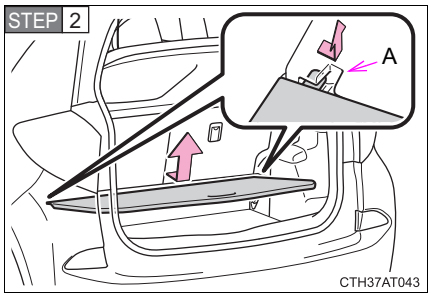

Lift the dual-level deck board further upward through the portion “A” in the illustration.

Securing the dual-level deck board

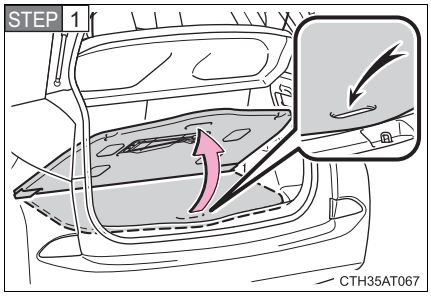

Lift the dual-level deck board up.

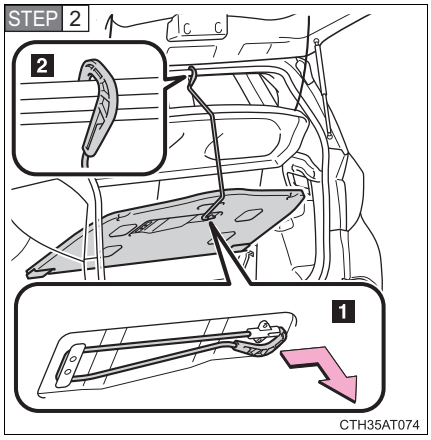

1 Remove the hook on the back-side of the dual-level deck board.

2 Attach the hook to the upper edge of the back door opening as shown.

■ **Removing the luggage cover**

The luggage cover can be removed by the following procedure:

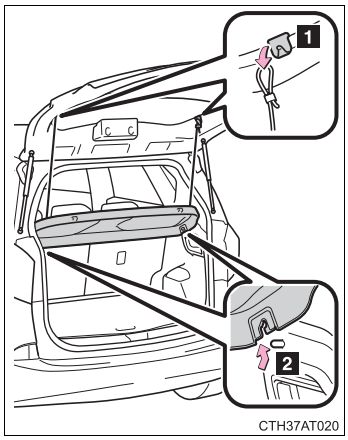

1 Unhook the cords.

2 Remove the luggage cover out of the retainers.



Unfasten the hook-and-loop fasteners from the seatback and remove the luggage cover.

CAUTION

■ **When operating the dual-level deck board or deck board**

Do not place anything on the dual-level deck board or deck board when operating the board. Otherwise, your fingers may be caught or an accident may result causing injuries.

■ **When the cargo hooks are not in use**

To avoid injury, always return the cargo hooks to their stowed positions.

NOTICE

■ **When closing the back door**

Do not leave the dual-level deck board hooks attached to the back door opening. The hooks may get jammed and damage the vehicle.

Maintenance and care 4

4-1. Maintenance and care

Cleaning and protecting the vehicle exterior 362

Cleaning and protecting the vehicle interior 366

4-2. Maintenance

Maintenance requirements..... 369

4-3. Do-it-yourself maintenance

Do-it-yourself service precautions 372

Hood 375

Positioning a floor jack..... 376

Engine compartment..... 378

Tires..... 392

Tire inflation pressure 395

Wheels..... 397

Air conditioning filter 399

Wireless remote control/ electronic key battery..... 402

Checking and replacing fuses 406

Light bulbs 422

Cleaning and protecting the vehicle exterior

Perform the following to protect the vehicle and maintain it in prime condition:

- Working from top to bottom, liberally apply water to the vehicle body, wheel wells and underside of the vehicle to remove any dirt and dust.
- Wash the vehicle body using a sponge or soft cloth, such as a chamois.
- For hard-to-remove marks, use car wash soap and rinse thoroughly with water.
- Wipe away any water.
- Wax the vehicle when the waterproof coating deteriorates.

  If water does not bead on a clean surface, apply wax when the vehicle body is cool.

■ **Automatic car washes**

- Fold the mirrors and remove the antenna before washing the vehicle. Start washing from the front of the vehicle. Make sure to re-install the antenna and extend the mirrors before driving.
- Brushes used in automatic car washes may scratch the vehicle surface and harm your vehicle's paint.
- In certain automatic car washes, the rear spoiler may interfere with machine operation. This may prevent the vehicle from being cleaned properly or result in damage to the rear spoiler.

■ **High pressure car washes**

- Do not allow the nozzles of the car wash to come within close proximity of the windows.
- Before using the car wash, check that the fuel filler door on your vehicle is closed properly.

■ **When using a car wash (vehicles with a smart entry & start system)**

If the door handle becomes wet while the electronic key is within the effective range, the door may lock and unlock repeatedly. Place the key in a position 2 m (6 ft.) or more separate from the vehicle while the vehicle is being washed. (Take care to ensure that the key is not stolen.)

■ **Aluminum wheels (if equipped)**

- Remove any dirt immediately by using a neutral detergent. Do not use hard brushes or abrasive cleaners. Do not use strong or harsh chemical cleaners.
  Use the same mild detergent and wax as used on the paint.
- Do not use detergent on the wheels when they are hot, for example after driving for long distance in the hot weather.
- Wash detergent from the wheels immediately after use.

■ **Bumpers**

Do not scrub with abrasive cleaners.

CAUTION

■ **When washing the vehicle**

Do not apply water to the inside of the engine compartment. Doing so may cause the electrical components etc. to catch fire.

CAUTION

■ **When cleaning the windshield (vehicles with rain-sensing windshield wiper)**



Set the wiper switch to off.
If the wiper switch is in “AUTO”, the wiper may operate unexpectedly in the following situations, and may result in hands being caught or other serious injuries and cause damage to the wiper blade.

- When the upper part of the windshield where the raindrop sensor is located is touched by hand
- When a wet rag or similar is held close to the raindrop sensor
- If something bumps against the windshield
- If you directly touch the raindrop sensor body or if something bumps into the raindrop sensor

■ **Precautions regarding the exhaust pipe**

Exhaust gasses cause the exhaust pipe to become quite hot.

When washing the vehicle, be careful not to touch the pipe until it has cooled sufficiently, as touching a hot exhaust pipe can cause burns.

NOTICE

■ **To prevent paint deterioration and corrosion on the body and components (aluminum wheels etc.)**

- Wash the vehicle immediately in the following cases:
  - After driving near the sea coast
  - After driving on salted roads
  - If coal tar or tree sap is present on the paint surface
  - If dead insects, insect droppings or bird droppings are present on the paint surface

NOTICE

- After driving in an area contaminated with soot, oily smoke, mine dust, iron powder or chemical substances
- If the vehicle becomes heavily soiled with dust or mud
- If liquids such as benzene and gasoline are spilled on the paint surface

● If the paint is chipped or scratched, have it repaired immediately.

● To prevent the wheels from corroding, remove any dirt and store in a place with low humidity when storing the wheels.

■ Cleaning the exterior lights

● Wash carefully. Do not use organic substances or scrub with a hard brush. This may damage the surfaces of the lights.

● Do not apply wax to the surfaces of the lights.
Wax may cause damage to the lenses.

■ Antenna installation and removal precautions

● Before driving, ensure that the antenna is installed.

● When the antenna is removed, such as before entering an automatic car wash, make sure to store it in a suitable place so as not to lose it. Also, before driving, make sure to reinstall the antenna in its original position.

■ When using an automatic car wash (vehicles with rain-sensing windshield wiper)

Set the wiper switch to the off position.
If the wiper switch is in “AUTO”, the wiper may operate and the wiper blade may be damaged.

■ To prevent damage to the antenna

Remove the antenna in the following situations:

● When the antenna will touch the ceiling of a garage or other such places

● When a car cover is to be used to cover the vehicle

Cleaning and protecting the vehicle interior

The following procedures will help protect your vehicle's interior and keep it in top condition:

Protecting the vehicle interior

Remove dirt and dust using a vacuum cleaner. Wipe dirty surfaces with a cloth dampened with lukewarm water.

Cleaning the leather areas

- Remove dirt and dust using a vacuum cleaner.
- Wipe off any excess dirt and dust with a soft cloth dampened with diluted detergent.

  Use a diluted water solution of approximately 5% neutral wool detergent.
- Wring out any excess water from the cloth and thoroughly wipe off all remaining traces of detergent.
- Wipe the surface with a dry, soft cloth to remove any remaining moisture. Allow the leather to dry in a shaded and ventilated area.

Cleaning the synthetic leather areas

- Remove loose dirt using a vacuum cleaner.
- Apply a mild soap solution to the synthetic leather using a sponge or soft cloth.
- Allow the solution to soak in for a few minutes. Remove the dirt and wipe off the solution with a clean, damp cloth.

■ **Caring for leather areas**

Toyota recommends cleaning the interior of the vehicle at least twice a year to maintain the quality of the vehicle's interior.

■ **Shampooing the carpets**

There are several commercial foaming-type cleaners available. Use a sponge or brush to apply the foam. Rub in overlapping circles. Do not use water. Wipe dirty surfaces and let them dry. Excellent results are obtained by keeping the carpet as dry as possible.

■ **Seat belts**

Clean with mild soap and lukewarm water using a cloth or sponge. Also check the belts periodically for excessive wear, fraying or cuts.

CAUTION

■ **Water in the vehicle**

- Do not splash or spill liquid in the vehicle.
  Doing so may cause electrical components etc. to malfunction or catch fire.
- Do not get any of the SRS components or wiring in the vehicle interior wet. (→P. 125)
  An electrical malfunction may cause the airbags to deploy or not function properly, resulting in death or serious injury.

■ **Cleaning the interior (especially instrument panel)**

Do not use polish wax or polish cleaner. The instrument panel may reflect off the windshield, obstructing the driver's view and leading to an accident, resulting in death or serious injury.

NOTICE

Cleaning detergents

- Do not use the following types of detergent, as they may discolor the vehicle interior or cause streaks or damage to painted surfaces:
  - Non-seat portions: Organic substances such as benzene or gasoline, alkaline or acidic solutions, dye, and bleach
  - Seats: Alkaline or acidic solutions, such as thinner, benzene, and alcohol
- Do not use polish wax or polish cleaner. The instrument panel's or other interior part's painted surface may be damaged.

Preventing damage to leather surfaces

Observe the following precautions to avoid damage to and deterioration of leather surfaces:

- Remove any dust or dirt from leather surfaces immediately.
- Do not expose the vehicle to direct sunlight for extended periods of time. Park the vehicle in the shade, especially during summer.
- Do not place items made of vinyl, plastic, or containing wax on the upholstery, as they may stick to the leather surface if the vehicle interior heats up significantly.

Water on the floor

Do not wash the vehicle floor with water.
Vehicle systems such as the audio system may be damaged if water comes into contact with electrical components such as the audio system above or under the floor of the vehicle. Water may also cause the body to rust.

Cleaning the inside of the rear window

- Do not use glass cleaner to clean the rear window, as this may cause damage to the rear window defogger heater wires. Use a cloth dampened with lukewarm water to gently wipe the window clean. Wipe the window in strokes running parallel to the heater wires.
- Be careful not to scratch or damage the heater wires.

Maintenance requirements

To ensure safe and economical driving, day-to-day care and regular maintenance are essential. Toyota recommends the following maintenance:

Scheduled maintenance

Scheduled maintenance should be performed at specified intervals according to the maintenance schedule.

For full details of your maintenance schedule, refer to the “Toyota Service Booklet” or “Toyota Warranty Booklet”.

Do-it-yourself maintenance

What about do-it-yourself maintenance?

Many maintenance items are easy to do yourself if you have a little mechanical ability and a few basic automotive tools.

Note, however, that some maintenance tasks require special tools and skills. These are best performed by qualified technicians. Even if you're an experienced do-it-yourself mechanic, we recommend that repairs and maintenance be conducted by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional. Any authorized Toyota dealer or repairer will keep a record of maintenance, which could be useful should you ever require Warranty Service. Should you choose to select a qualified and equipped professional other than an authorized Toyota repairer to service or maintain your vehicle, we recommend that you request that a record of maintenance be kept.

Where to go for maintenance service?

In order to maintain your vehicle in the best possible condition, Toyota recommends that maintenance service operations as well as other inspections and repairs be carried out by authorized Toyota dealers or repairers or other duly qualified and equipped professionals. For repairs and services covered by your warranty, please visit an authorized Toyota dealer or repairer, who will use genuine Toyota parts in repairing any difficulties you may encounter. There can also be advantages in utilizing authorized Toyota dealers or repairers for non-warranty repairs and services, as members of the Toyota network will be able to expertly assist you with any difficulties you may encounter.

Your Toyota dealer or repairer, or another duly qualified and equipped professional will perform all of the scheduled maintenance on your vehicle reliably and economically due to their experience with Toyota vehicles.

Does your vehicle need repairs?

Be on the alert for changes in performance and sounds, and visual tip-offs that indicate service is needed. Some important clues are:

- Engine missing, stumbling or pinging
- Appreciable loss of power
- Strange engine noises
- A fluid leak under the vehicle (However, water dripping from the air conditioning system after use is normal.)
- Change in exhaust sound (This may indicate a dangerous carbon monoxide leak. Drive with the windows open and have the exhaust system checked immediately.)
- Flat-looking tires, excessive tire squeal when cornering, uneven tire wear
- Vehicle pulls to one side when driven straight on a level road
- Strange noises related to suspension movement
- Loss of brake effectiveness, spongy feeling brake pedal or clutch pedal (vehicles with a manual transmission), pedal almost touches the floor, vehicle pulls to one side when braking

- Engine coolant temperature continually higher than normal

If you notice any of these clues, take your vehicle to any authorized Toyota dealer or repairer, or another duly qualified and equipped professional as soon as possible. Your vehicle may need adjustment or repair.

CAUTION

If your vehicle is not properly maintained

Improper maintenance could result in serious damage to the vehicle and possible serious injury or death.

Handling of the battery

Battery posts, terminals and related accessories contain lead and lead compounds which are known to cause brain damage. Wash your hands after handling. (→P. 386)

Do-it-yourself service precautions

If you perform maintenance by yourself, be sure to follow the correct procedures as given in these sections.

Items	Parts and tools
Battery condition (→P. 386)	• Warm water • Baking soda • Grease • Conventional wrench (for terminal clamp bolts) • Distilled water
Engine coolant level (→P. 384)	• “Toyota Super Long Life Coolant” or a similar high quality ethylene glycol-based non-silicate, non-amine, non-nitrite and non-borate coolant with long-life hybrid organic acid technology. “Toyota Super Long Life Coolant” is pre-mixed with 50% coolant and 50% deionized water. • Funnel (used only for adding coolant)
Engine oil level (→P. 380)	• “Toyota Genuine Motor Oil” or equivalent • Rag or paper towel • Funnel (used only for adding engine oil)
Fuses (→P. 406)	• Fuse with same amperage rating as original
Light bulbs (→P. 422)	• Bulb with same number and wattage rating as original • Phillips-head screwdriver • Flathead screwdriver • Wrench
Radiator, condenser and intercooler (→P. 386)	—

Items	Parts and tools
Tire inflation pressure (→P. 395)	• Tire pressure gauge • Compressed air source
Washer fluid (→P. 390)	• Water or washer fluid containing antifreeze (for winter use) • Funnel (used only for adding water or washer fluid)

CAUTION

The engine compartment contains many mechanisms and fluids that may move suddenly, become hot, or become electrically energized. To avoid death or serious injury, observe the following precautions:

When working on the engine compartment:

- Keep hands, clothing and tools away from the moving fan and engine drive belt.
- Be careful not to touch the engine, radiator, exhaust manifold, etc. right after driving as they may be hot. Oil and other fluids may also be hot.
- Do not leave anything that may burn easily, such as paper and rags, in the engine compartment.
- Do not smoke, cause sparks or expose an open flame to fuel or the battery. Fuel and battery fumes are flammable.
- Be extremely cautious when working on the battery. It contains poisonous and corrosive sulfuric acid.
- Take care because brake fluid can harm your hands or eyes and damage painted surfaces. If fluid gets on your hands or in your eyes, flush the affected area with clean water immediately.
  If you still experience discomfort, consult a doctor.

CAUTION

When working near the electric cooling fans or radiator grille

Vehicles without a smart entry & start system: Be sure the engine switch is off. With the engine switch in the “ON” position, the electric cooling fans may automatically start to run if the air conditioning is on and/or the coolant temperature is high. (→P. 386)

Vehicles with a smart entry & start system: Be sure the “ENGINE START STOP” switch is off. With the “ENGINE START STOP” switch in IGNITION ON mode, the electric cooling fans may automatically start to run if the air conditioning is on and/or the coolant temperature is high. (→P. 386)

Safety glasses

Wear safety glasses to prevent flying or falling material, fluid spray, etc. from getting in your eyes.

NOTICE

If you remove the air cleaner filter

Driving with the air cleaner filter removed may cause excessive engine wear due to dirt in the air.

If the fluid level is low or high

It is normal for the brake fluid level to go down slightly as the brake pads wear or when the fluid level in the accumulator is high.
If the reservoir needs frequent refilling, it may indicate a serious problem.

Hood

Release the lock from the inside of the vehicle to open the hood.

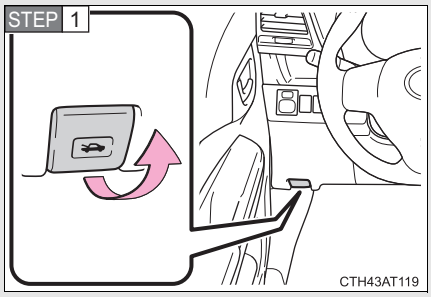

Pull the hood release lever.

The hood will pop up slightly.

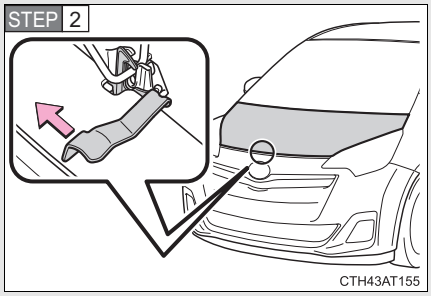

Push the auxiliary catch lever to the left and lift the hood.

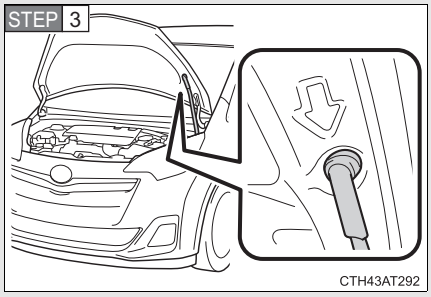

Hold the hood open by inserting the supporting rod into the slot.

CAUTION

■ **Pre-driving check**

Check that the hood is fully closed and locked.
If the hood is not locked properly, it may open while the vehicle is in motion and cause an accident, which may result in death or serious injury.

Positioning a floor jack

When raising your vehicle with a floor jack, position the jack correctly. Improper placement may damage your vehicle or cause injury.

Front

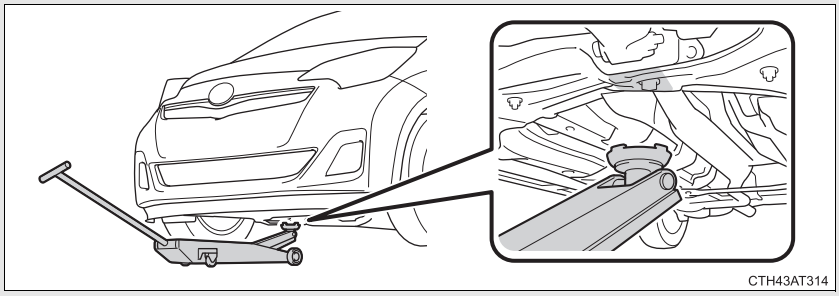

Rear

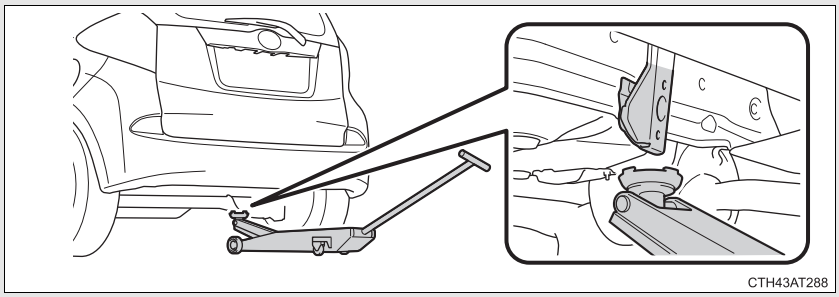

CAUTION

When raising your vehicle

Make sure to observe the following precautions to reduce the possibility of death or serious injury:



- Lift up the vehicle using a floor jack such as the one shown in the illustration.
- When using a floor jack, follow the instructions of the manual provided with the jack.
- Do not use the jack that was supplied with your vehicle.
- Do not put any part of your body underneath the vehicle when it is supported only by the floor jack.
- Always use floor jack and/or automotive jack stands on a solid, flat, level surface.
- Do not start the engine while the vehicle is supported by the floor jack.
- Stop the vehicle on level, firm ground, firmly set the parking brake and shift the shift lever to P (vehicles with a Multidrive), E, M or R (vehicles with a multi-mode manual transmission) or R (vehicles with a manual transmission).
- Make sure to set the floor jack properly at the jack point.
  Raising the vehicle with an improperly positioned floor jack will damage the vehicle and may cause the vehicle to fall off the floor jack.
- Do not raise the vehicle while someone is in the vehicle.
- When raising the vehicle, do not place any object on top of or underneath the floor jack.

Engine compartment

1NR-FE engine

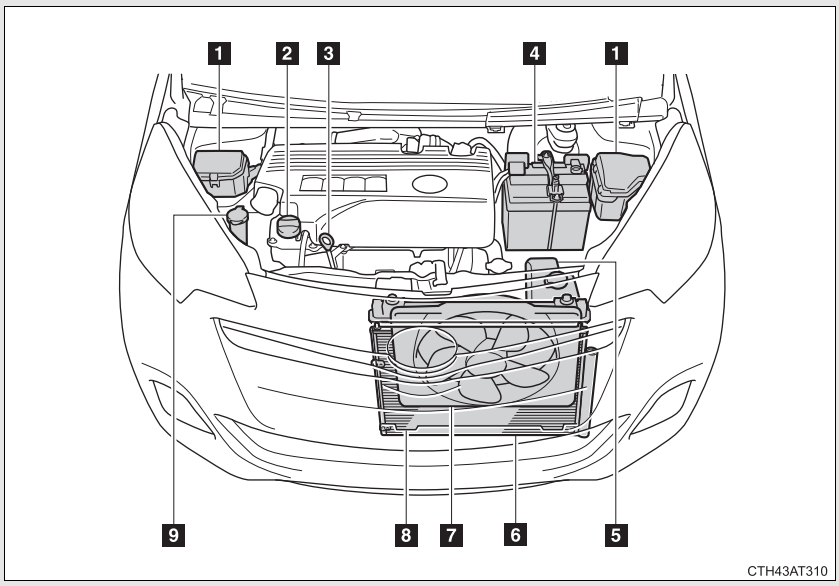

1 Fuse boxes (→P. 406)
2 Engine oil filler cap (→P. 381)
3 Engine oil level dipstick (→P. 380)
4 Battery (→P. 386)
5 Engine coolant reservoir (→P. 384)
6 Radiator (→P. 386)
7 Electric cooling fan
8 Condenser (→P. 386)
9 Washer fluid tank (→P. 390)

1ND-TV engine

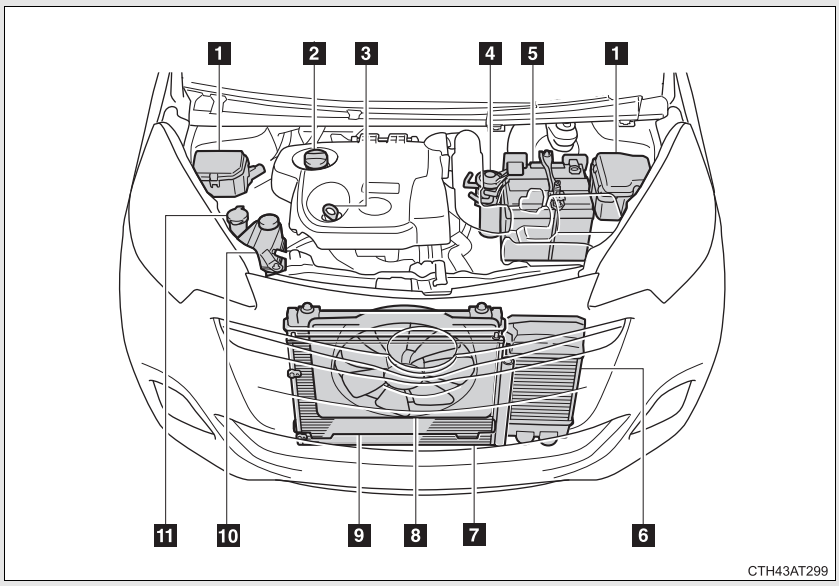

1 Fuse boxes (→P. 406)
2 Engine oil filler cap (→P. 381)
3 Engine oil level dipstick (→P. 380)
4 Fuel filter (→P. 510)
5 Battery (→P. 386)
6 Intercooler (→P. 386)
7 Radiator (→P. 386)
8 Electric cooling fan
9 Condenser (→P. 386)
10 Engine coolant reservoir (→P. 384)
11 Washer fluid tank (→P. 390)

Engine oil

With the engine at operating temperature and turned off, check the oil level on the dipstick.

■ Checking the engine oil

STEP 1 Gasoline engine: Park the vehicle on level ground. After turning off the engine, wait more than 5 minutes for the oil to drain back into the bottom of the engine.

Diesel engine: Park the vehicle on level ground. After warming up the engine and turning it off, wait more than 5 minutes for the oil to drain back into the bottom of the engine.

STEP 2

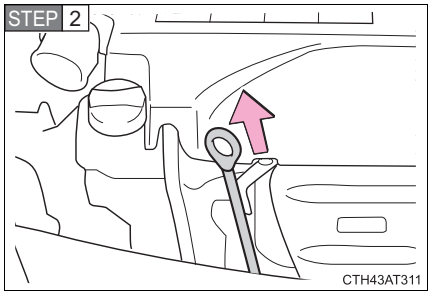

Holding a rag under the end, pull the dipstick out.

STEP 3 Wipe the dipstick clean.

STEP 4 Reinsert the dipstick fully.

STEP 5 Holding a rag under the end, pull the dipstick out and check the oil level.

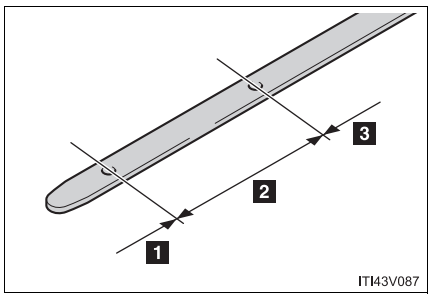

1 Low

2 Normal

3 Excessive

The shape of the dipstick may differ depending on the type of vehicle or engine.

STEP 6 Wipe the dipstick and reinsert it fully.

■ Adding engine oil

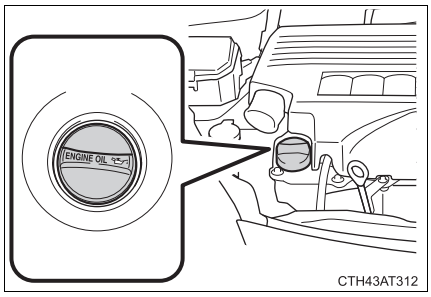

If the oil level is below or near the low level mark, add engine oil of the same type as that already in the engine.

Make sure to check the oil type and prepare the items needed before adding oil.

Engine oil selection	→P. 523
Oil quantity (Low → Full)	1.5 L (1.6 qt., 1.3 Imp. qt.)
Item	Clean funnel

STEP 1 Remove the oil filler cap by turning it counterclockwise.

STEP 2 Add engine oil slowly, checking the dipstick.

STEP 3 Install the oil filler cap by turning it clockwise.

■ Engine oil consumption

A certain amount of engine oil will be consumed while driving. In the following situations, oil consumption may increase, and engine oil may need to be refilled in between oil maintenance intervals.

- When the engine is new, for example directly after purchasing the vehicle or after replacing the engine
- If low quality oil or oil of an inappropriate viscosity is used
- When driving at high engine speeds or with a heavy load, when towing, or when driving while accelerating or decelerating frequently
- When leaving the engine idling for a long time, or when driving frequently through heavy traffic

After changing the engine oil (diesel engine only)

The engine oil maintenance data should be reset. Perform the following procedures:

STEP 1 Switch the display to the trip meter “A” when the engine is running. (→P. 208)

STEP 2 **Vehicles without a smart entry & start system**

Turn the engine switch off.

Vehicles with a smart entry & start system

Turn the “ENGINE START STOP” switch off.

STEP 3 **Vehicles without a smart entry & start system**

While pressing the display change button (→P. 208), turn the engine switch to the “ON” position (do not start the engine because reset mode will be canceled). Continue to press and hold the button until the trip meter displays “000000”.

Vehicles with a smart entry & start system

While pressing the display change button (→P. 208), turn the “ENGINE START STOP” switch to the IGNITION ON mode (do not start the engine because otherwise the reset mode will be canceled). Continue to press and hold the button until the trip meter displays “000000”.

CAUTION

Used engine oil

- Used engine oil contains potentially harmful contaminants which may cause skin disorders such as inflammation and skin cancer, so care should be taken to avoid prolonged and repeated contact. To remove used engine oil from your skin, wash thoroughly with soap and water.
- Dispose of used oil and filters only in a safe and acceptable manner. Do not dispose of used oil and filters in household trash, in sewers or onto the ground. Call any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, service station or auto parts store for information concerning recycling or disposal.
- Do not leave used engine oil within the reach of children.

NOTICE

■ **To prevent serious engine damage**

Check the oil level on a regular basis.

■ **When replacing the engine oil**

- Be careful not to spill engine oil on the vehicle components.
- Avoid overfilling, or the engine could be damaged.
- Check the oil level on the dipstick every time you refill the vehicle.
- Be sure the engine oil filler cap is properly tightened.

■ **Engine oil (diesel engine only)**

Using an engine oil other than ACEA C2 may damage the catalytic converter.

Engine coolant

The coolant level is satisfactory if it is between the “FULL” and “LOW” lines on the reservoir when the engine is cold.

Gasoline engine

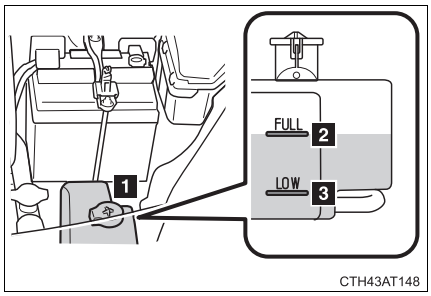

1 Reservoir cap

2 “FULL” line

3 “LOW” line

If the level is on or below the “LOW” line, add coolant up to the “FULL” line.

Diesel engine

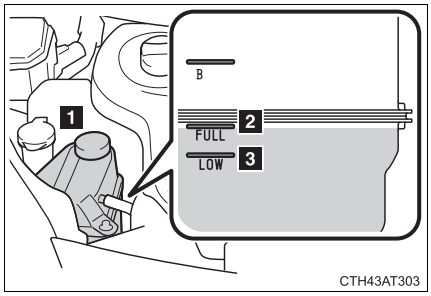

1 Reservoir cap

2 “FULL” line

3 “LOW” line

If the level is on or below the “LOW” line, add coolant up to the “FULL” line.

Coolant selection

Only use “Toyota Super Long Life Coolant” or a similar high quality ethylene glycol based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology.

“Toyota Super Long Life Coolant” is a mixture of 50% coolant and 50% deionized water. (Minimum temperature: -35°C [-31°F])

For more details about engine coolant, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

If the coolant level drops within a short time of replenishing

Visually check the radiator, hoses, engine coolant reservoir cap, drain cock and water pump.
If you cannot find a leak, have any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, test the cap and check for leaks in the cooling system.

CAUTION

When the engine is hot

Do not remove the engine coolant reservoir cap.
The cooling system may be under pressure and may spray hot coolant if the cap is removed, causing serious injuries, such as burns.

NOTICE

When adding coolant

Coolant is neither plain water nor straight antifreeze. The correct mixture of water and antifreeze must be used to provide proper lubrication, corrosion protection and cooling. Be sure to read the antifreeze or coolant label.

If you spill coolant

Be sure to wash it off with water to prevent it from damaging parts or paint.

Radiator, condenser and intercooler

Check the radiator, condenser and intercooler and clear away any foreign objects.
If any of the above parts are extremely dirty or you are not sure of their condition, have your vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

When the engine is hot

Do not touch the radiator, condenser or intercooler as they may be hot and cause serious injuries, such as burns.

Battery

Check the battery as follows.

Caution symbols

The meanings of each caution symbol on the top of the battery are as follows:

	No smoking, no naked flames, no sparks		Battery acid
	Shield eyes		Note operating instructions
	Keep away from children		Explosive gas

Battery exterior

Make sure that the battery terminals are not corroded and that there are no loose connections, cracks, or loose clamps.

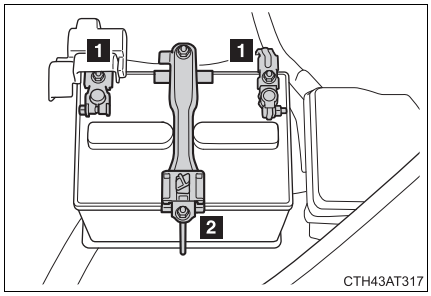

1 Terminals

2 Hold-down clamp

Checking battery fluid

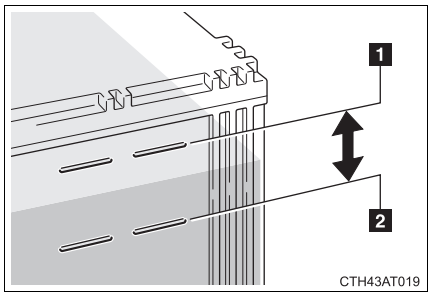

Check that the level is between the “UPPER LEVEL” and “LOWER LEVEL” lines.

1 “UPPER LEVEL” line

2 “LOWER LEVEL” line

If the fluid level is at or below the “LOWER LEVEL” line, add distilled water.

Adding distilled water

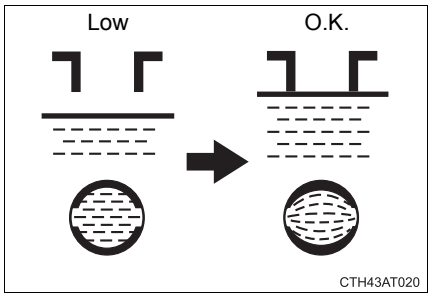

STEP 1 Remove the vent plug.

STEP 2 Add distilled water.

If the “UPPER LEVEL” line cannot be seen, check the fluid level by looking directly at the cell.

STEP 3 Put the vent plug back on and close it securely.

■ **Before recharging**

When recharging, the battery produces hydrogen gas which is flammable and explosive. Therefore, observe the following before recharging:

- If recharging with the battery installed on the vehicle, be sure to disconnect the ground cable.
- Make sure the power switch on the charger is off when connecting and disconnecting the charger cables to the battery.

■ **After recharging/reconnecting the battery (vehicles with a smart entry & start system)**

- Unlocking the doors using the smart entry & start system may not be possible immediately after reconnecting the battery. If this happens, use the wireless remote control or the mechanical key to lock/unlock the doors.
- Start the engine with the “ENGINE START STOP” switch in ACCESSORY mode. The engine may not start with the “ENGINE START STOP” switch turned off. However, the engine will operate normally from the second attempt.
- The “ENGINE START STOP” switch mode is recorded by the vehicle. If the battery is reconnected, the vehicle will return the “ENGINE START STOP” switch mode to the status it was in before the battery was disconnected. Make sure to turn off the engine before disconnect the battery. Take extra care when connecting the battery if the “ENGINE START STOP” switch mode prior to discharge is unknown.

If the engine will not start even after multiple attempts, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

■ **Chemicals in the battery**

Batteries contain poisonous and corrosive sulfuric acid and may produce hydrogen gas which is flammable and explosive. To reduce the risk of death or serious injury, take the following precautions while working on or near the battery:

- Do not cause sparks by touching the battery terminals with tools.
- Do not smoke or light a match near the battery.
- Avoid contact with eyes, skin and clothes.
- Never inhale or swallow electrolyte.
- Wear protective safety glasses when working near the battery.
- Keep children away from the battery.

■ **Where to safely charge the battery**

Always charge the battery in an open area. Do not charge the battery in a garage or closed room where there is insufficient ventilation.

■ **Emergency measures regarding electrolyte**

- If electrolyte gets in your eyes
  Flush your eyes with clean water for at least 15 minutes and get immediate medical attention. If possible, continue to apply water with a sponge or cloth while traveling to the nearest medical facility.
- If electrolyte gets on your skin
  Wash the affected area thoroughly. If you feel pain or burning, get medical attention immediately.
- If electrolyte gets on your clothes
  It can soak through clothing on to your skin. Immediately take off the clothing and follow the procedure above if necessary.
- If you accidentally swallow electrolyte
  Drink a large quantity of water or milk. Follow with milk of magnesia, beaten raw egg or vegetable oil. Get emergency medical attention immediately.

NOTICE

■ **When recharging the battery**

Never recharge the battery while the engine is running. Also, be sure all accessories are turned off.

■ **When adding distilled water**

Avoid overfilling. Water spilled during battery recharging may cause corrosion.

Washer fluid

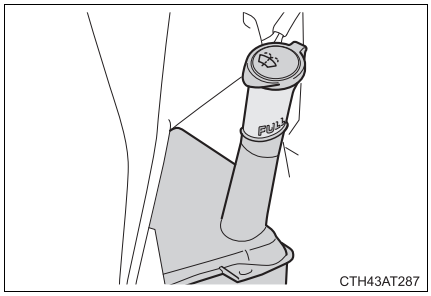

If the washer fluid level is less than “FULL” line, add washer fluid to “FULL” line.

CAUTION

■ **When adding washer fluid**

Do not add washer fluid when the engine is hot or running as washer fluid contains alcohol and may catch fire if spilled on the engine etc.

NOTICE

■ **Do not use any fluid other than washer fluid**

Do not use soapy water or engine antifreeze instead of washer fluid.
Doing so may cause streaking on the vehicle's painted surfaces.

■ **Diluting washer fluid**

Dilute washer fluid with water as necessary.
Refer to the freezing temperatures listed on the label of the washer fluid bottle.

Replace or rotate tires in accordance with maintenance schedules and treadwear.

Checking tires

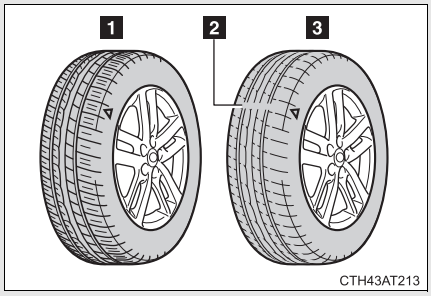

1 New tread

2 Treadwear indicator

3 Worn tread

The location of treadwear indicators is shown by the “TWI” or “Δ” marks, etc., molded on the sidewall of each tire.

Check spare tire condition and pressure if not rotated.

Tire rotation

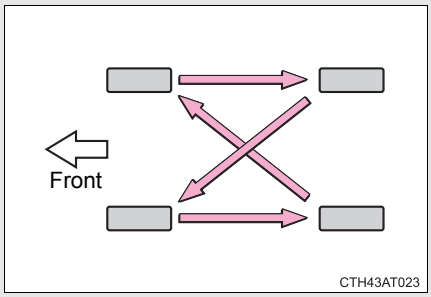

Rotate the tires in the order shown.

To equalize tire wear and help extend tire life, Toyota recommends that tire rotation is carried out approximately every 10000 km (6000 miles).

■ **When to replace your vehicle's tires**

Tires should be replaced if:

- You have tire damage such as cuts, splits, cracks deep enough to expose the fabric, and bulges indicating internal damage
- A tire goes flat repeatedly or cannot be properly repaired due to the size or location of a cut or other damage

If you are not sure, consult with any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

■ **Tire life**

Any tire over 6 years old must be checked by a qualified technician even if it has seldom or never been used or damage is not obvious.

■ **If the tread on snow tires wears down below 4 mm (0.16 in.)**

The effectiveness of the tires as snow tires is lost.

CAUTION

■ **When inspecting or replacing tires**

Observe the following precautions to prevent accidents.
Failure to do so may cause damage to parts of the drive train as well as dangerous handling characteristics, which may lead to an accident resulting in death or serious injury.

- Do not mix tires of different makes, models or tread patterns.
  Also, do not mix tires of remarkably different treadwear.
- Do not use tire sizes other than those recommended by Toyota.
- Do not mix differently constructed tires (radial, bias-belted or bias-ply tires).
- Do not mix summer, all season and snow tires.
- Do not use tires that have been used on another vehicle.
  Do not use tires if you do not know how they were used previously.
- Vehicles with a compact spare tire: Do not tow if your vehicle has a compact spare tire installed.

NOTICE

Driving on rough roads

Take particular care when driving on roads with loose surfaces or potholes. These conditions may cause losses in tire inflation pressure, reducing the cushioning ability of the tires. In addition, driving on rough roads may cause damage to the tires themselves, as well as the vehicle's wheels and body.

If tire inflation pressure of each tire becomes low while driving

Do not continue driving, or your tires and/or wheels may be ruined.

Tire inflation pressure

Make sure to maintain proper tire inflation pressure. Tire inflation pressure should be checked at least once per month. However, Toyota recommends that tire inflation pressure be checked once every two weeks. (→P. 531)

Effects of incorrect tire inflation pressure

Driving with incorrect tire inflation pressure may result in the following:

- Reduced fuel efficiency
- Reduced driving comfort and tire life
- Reduced safety
- Damage to the drive train

If a tire needs frequent inflating, have it checked by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Instructions for checking tire inflation pressure

When checking tire inflation pressure, observe the following:

- Check only when the tires are cold.
  If your vehicle has been parked for at least 3 hours or has not been driven for more than 1.5 km or 1 mile, you will get an accurate cold tire inflation pressure reading.
- Always use a tire pressure gauge.
  The appearance of the tire can be misleading. In addition, tire inflation pressure that is even just a few pounds off can affect ride quality and handling.
- Do not reduce tire inflation pressure after driving. It is normal for tire inflation pressure to be higher after driving.
- Never exceed the vehicle capacity weight.
  Passengers and luggage weight should be placed so that the vehicle is balanced.

CAUTION

Proper inflation is critical to save tire performance

Keep your tires properly inflated. Otherwise, the following conditions may occur and result in an accident causing death or serious injury:

- Excessive wear
- Uneven wear
- Poor handling
- Possibility of blowouts resulting from overheated tires
- Poor sealing of the tire bead
- Wheel deformation and/or tire separation
- A greater possibility of tire damage from road hazards

NOTICE

When inspecting and adjusting tire inflation pressure

Be sure to put the tire valve caps back on.
Without the valve caps, dirt or moisture could get into the valve and cause air leakage, which could result in an accident. If the caps are lost, replace them as soon as possible.

If a wheel is bent, cracked or heavily corroded, it should be replaced. Otherwise, the tire may separate from the wheel or cause a loss of handling control.

■ **Wheel selection**

When replacing wheels, care should be taken to ensure that they are equivalent to those removed in load capacity, diameter, rim width and inset*.

Replacement wheels are available at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

*: Conventionally referred to as “offset”.

Toyota does not recommend using the following:

- Wheels of different sizes or types
- Used wheels
- Bent wheels that have been straightened

■ **Aluminum wheel precautions (if equipped)**

- Use only Toyota wheel nuts and wrenches designed for use with your aluminum wheels.
- When rotating, repairing or changing your tires, check that the wheel nuts are still tight after driving 1600 km (1000 miles).
- Be careful not to damage the aluminum wheels when using tire chains.
- Use only Toyota genuine balance weights or equivalent and a plastic or rubber hammer when balancing your wheels.

CAUTION

When replacing wheels

- Do not use wheels that are a different size from those recommended in the Owner's Manual, as this may result in a loss of handling control.
- Never use an inner tube in a leaking wheel which is designed for a tubeless tire. Doing so may result in an accident, causing death or serious injury.

When installing the wheel nuts



- Be sure to install the wheel nuts with the tapered end facing inward. Installing the nuts with the tapered end facing outward can cause wheel to break and eventually cause a wheel to come off while driving, which could lead to an accident resulting in death or serious injury.
- Never use oil or grease on the wheel bolts or wheel nuts.
  Oil and grease may cause the wheel nuts to be excessively tightened, leading to bolt or disc wheel damage. In addition, the oil or grease can cause the wheel nuts to loosen and the wheel may fall off, causing an accident and resulting in death or serious injury. Remove any oil or grease from the wheel bolts or wheel nuts.

Air conditioning filter

The air conditioning filter must be changed regularly to maintain air conditioning efficiency.

■ Removal method

STEP 1 Turn the engine switch (vehicles without a smart entry & start system) or “ENGINE START STOP” switch (vehicles with a smart entry & start system) off.

STEP 2

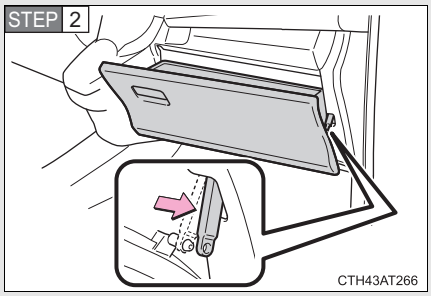

Open the glove box. Slide off the damper.

STEP 3

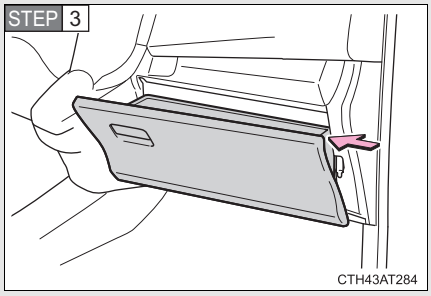

Push in the glove box on the vehicle’s outer side to disconnect the claws.

STEP 4

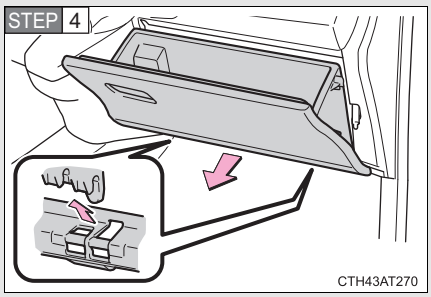

Pull out the glove box and disconnect the lower claws.

STEP 5 Remove the filter cover.

Left-hand drive vehicles

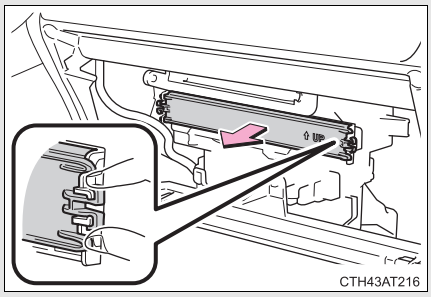

Right-hand drive vehicles

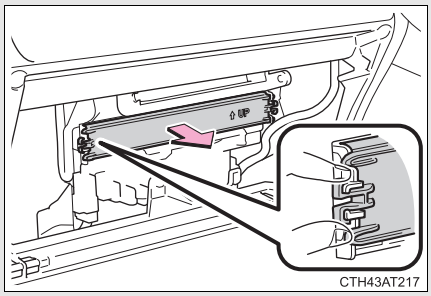

STEP 6 Replace it with a new one. The "↑UP" marks shown on the filter should be pointing up.

■ **Checking interval**

Replace the air conditioning filter according to the maintenance schedule. In dusty areas or areas with heavy traffic flow, early replacement may be required. (For scheduled maintenance information, please refer to the "Toyota Service Booklet" or "Toyota Warranty Booklet".)

■ **If air flow from the vents decreases dramatically**

The filter may be clogged. Check the filter and replace if necessary.

NOTICE

When using the air conditioning system

Make sure that a filter is always installed.
Using the air conditioning system without a filter may cause damage to the system.

Wireless remote control/electronic key battery

Replace the battery with a new one if it is depleted.

■ You will need the following items:

- Flathead screwdriver
- Lithium battery CR2016 (vehicles without a smart entry & start system), or CR1632 (vehicles with a smart entry & start system)

■ Replacing the battery (vehicles without a smart entry & start system)

STEP 1

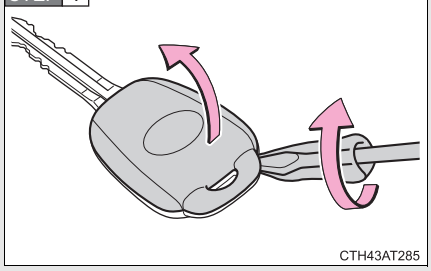

Remove the cover.

To prevent damage to the key, cover the tip of the screwdriver with a rag.

To prevent the buttons from being disassembled, face the button surface downward.

STEP 2

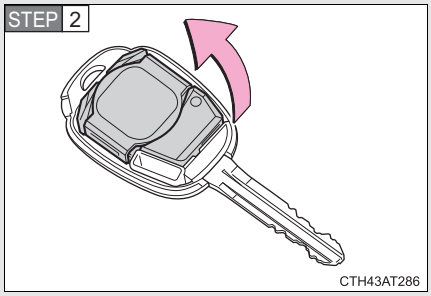

Remove the module.

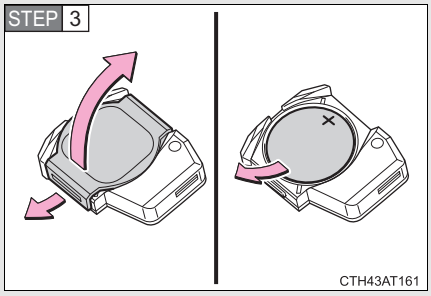

Open the case cover and remove the depleted battery.

Insert a new battery with the "+" terminal facing up.

■ **Replacing the battery (vehicles with a smart entry & start system)**

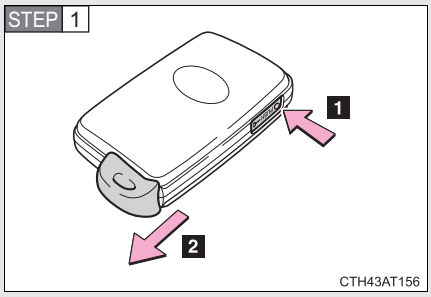

Take out the mechanical key.

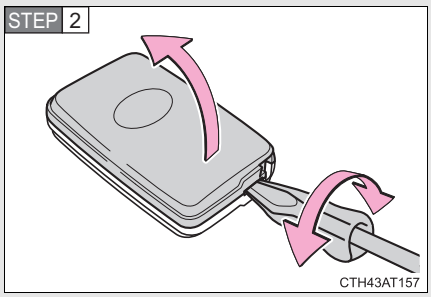

Remove the cover.

To prevent damage to the key, cover the tip of the screwdriver with a rag.

STEP 3

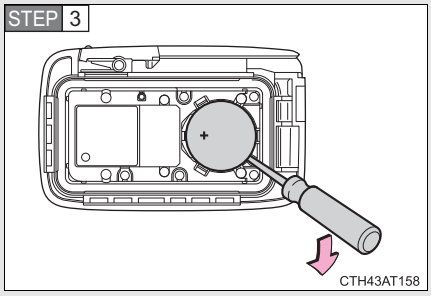

Remove the depleted battery.

Insert a new battery with the "+" terminal facing up.

■ **Use a CR2016 (vehicles without a smart entry & start system) or CR1632 (vehicles with a smart entry & start system) lithium battery**

- Batteries can be purchased at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, local electrical appliance shops or camera stores.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local laws.

■ **If the key battery is depleted**

The following symptoms may occur:

- The smart entry & start system (if equipped) and wireless remote control will not function properly.
- The operational range will be reduced.

■ **When replacing the module (vehicles without a smart entry and start system)**



Replace the module from right above. Replacing it from diagonally above may prevent the key buttons from operating properly.

CAUTION

Removed battery and other parts

These parts are small and if swallowed by a child, they can cause choking. Keep away from children. Failure to do so could result in death or serious injury.

Certification for the lithium battery

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

NOTICE

For normal operation after replacing the battery

Observe the following precautions to prevent accidents:

- Always work with dry hands.
  Moisture may cause the battery to rust.
- Do not touch or move any other component inside the remote control.
- Do not bend either of the battery terminals.

Checking and replacing fuses

If any of the electrical components do not operate, a fuse may have blown. If this happens, check and replace the fuses as necessary.

STEP 1 **Vehicles without a smart entry & start system**

Turn the engine switch off.

Vehicles with a smart entry & start system

Turn the “ENGINE START STOP” switch off.

STEP 2 Open the fuse box cover.

Engine compartment (type A fuse box)

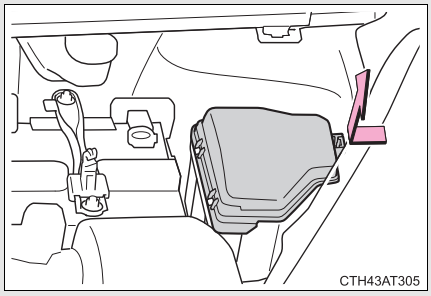

Push the tab in and lift the lid off.

Engine compartment (type B fuse box)

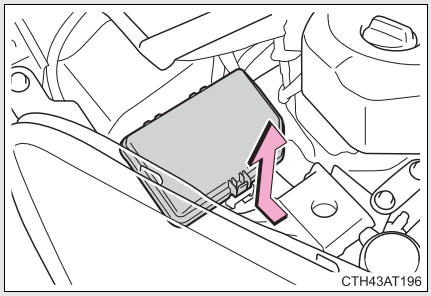

Push the tab in and lift the lid off.

Engine compartment (type C fuse box for the left-hand drive vehicles)

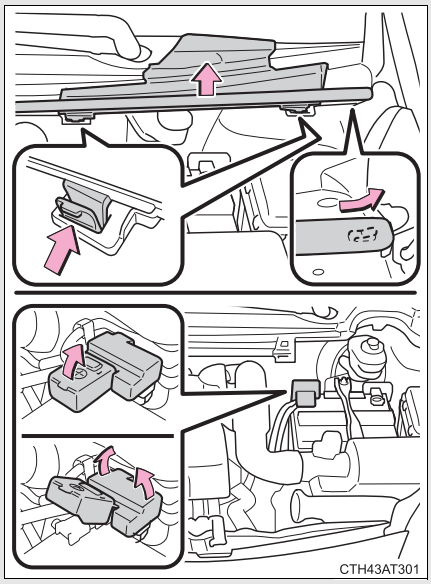

Pull the rubber strip on the edge to unhook it from the cover, and then push the tabs in and lift the cover off. Remove the battery terminal cover and then the fuse box cover.

Engine compartment (type C fuse box for the right-hand drive vehicles)

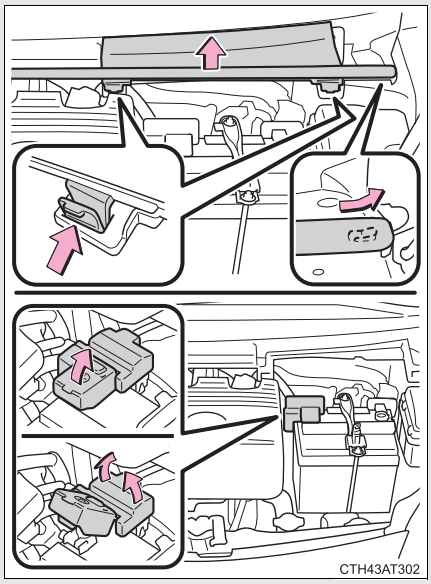

Pull the rubber strip on the edge to unhook it from the cover, and then push the tabs in and lift the cover off. Remove the battery terminal cover and then the fuse box cover.

Under the instrument panel (left-hand drive vehicles)

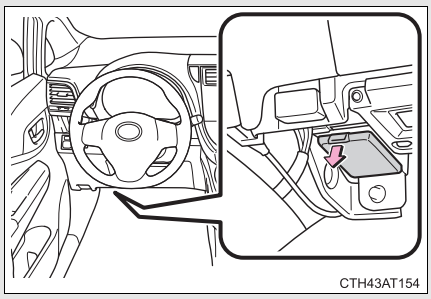

Remove the lid.

Under the instrument panel (right-hand drive vehicles)

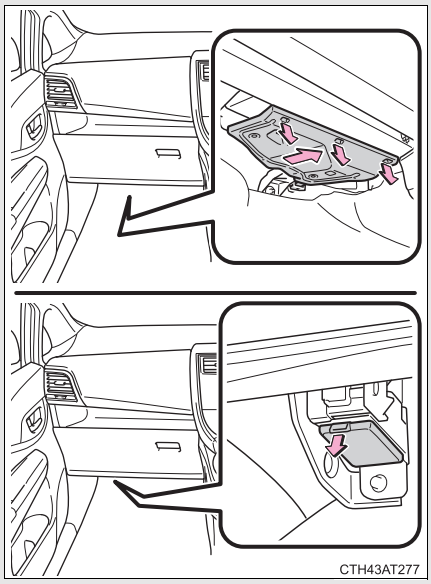

Remove the cover and then remove the lid.

Do not pull off the cover using excessive force as it is attached to the footwell light.

STEP 3 After a system failure, see “Fuse layout and amperage ratings” (→P. 413) for details about which fuse to check.

STEP 4 Remove the fuse.

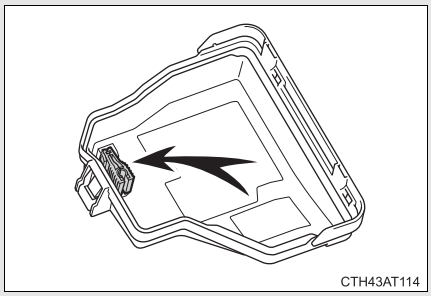

Only type A fuse can be removed using the pullout tool.

The pullout tool is located on the back of the type A fuse box cover.

STEP 5 Check if the fuse is blown.

Type A

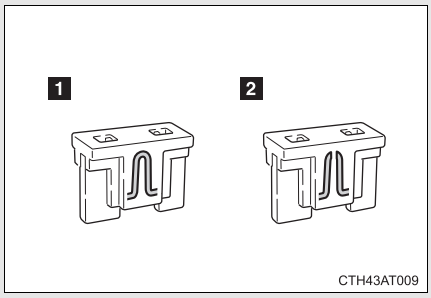

1 Normal fuse

2 Blown fuse

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.

Type B

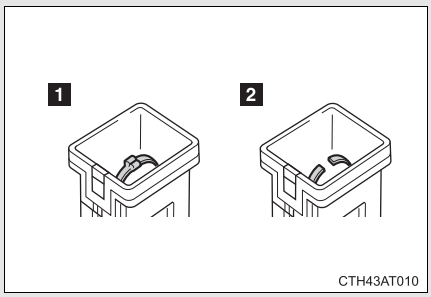

1 Normal fuse

2 Blown fuse

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.

Type C

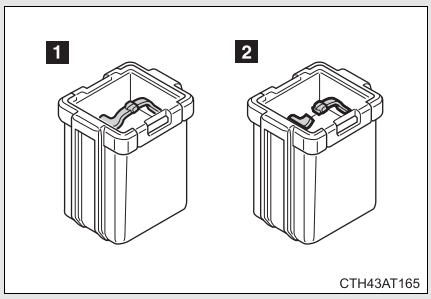

1 Normal fuse

2 Blown fuse

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.

Type D

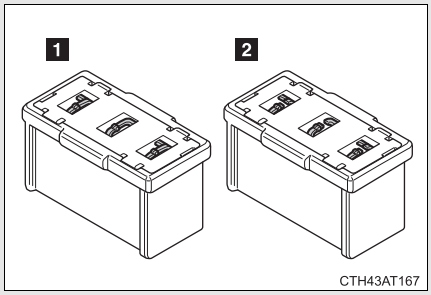

1 Normal fuse

2 Blown fuse

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.

Type E

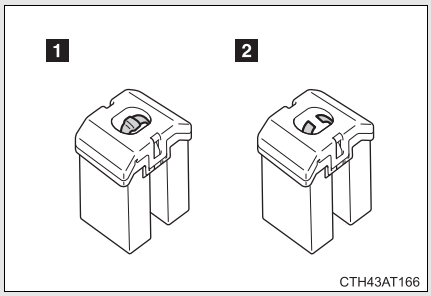

1 Normal fuse

2 Blown fuse

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.

Type F

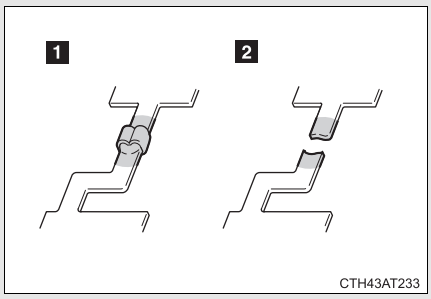

1 Normal fuse

2 Blown fuse

Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

STEP 6 Reinstall the cover and rubber strip. (type C fuse box cover only)

Left hand drive vehicles

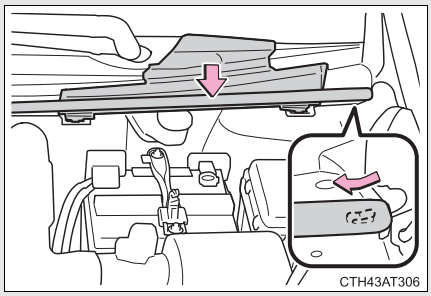

Right hand drive vehicles

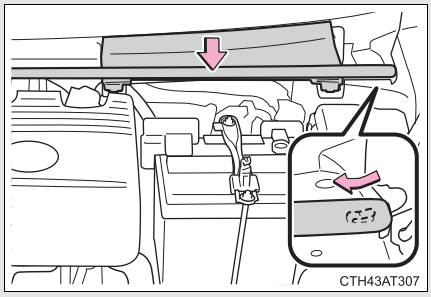

Fuse layout and amperage ratings

Engine compartment

Type A

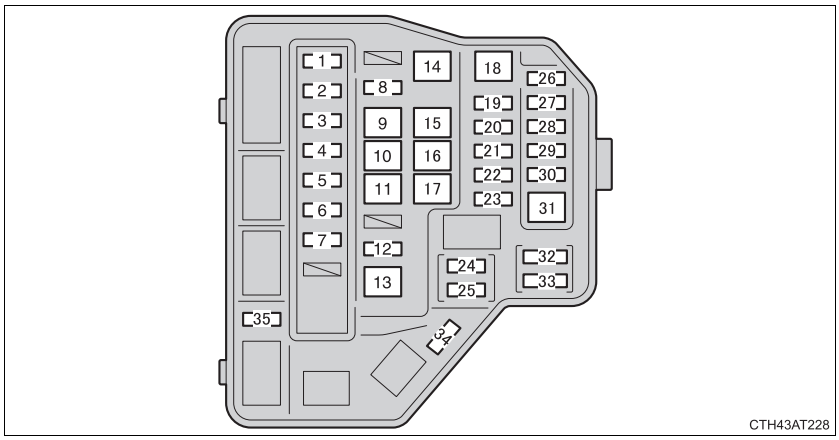

Fuse		Ampere	Circuit
1	EFI MAIN*1	20 A	Multiport fuel injection system/ sequential multiport fuel injection system
	ECD MAIN*2	30 A	Multiport fuel injection system/ sequential multiport fuel injection system, EFI NO.2
2	EFI NO.3	7.5 A	Multiport fuel injection system/ sequential multiport fuel injection system
3	HORN	10 A	Horn
4	EFI NO.2	10 A	Stop & Start system, multiport fuel injection system/sequential multi-port fuel injection system

Fuse		Ampere	Circuit
5	IG2	10 A	Smart entry & start system, multi-port fuel injection system/sequential multiport fuel injection system, multi-mode manual transmission, SRS airbag system, steering lock system, stop lights, Stop & Start system
6	IGN	15 A	Multiport fuel injection system/ sequential multiport fuel injection system
7	MET	7.5 A	Gauge and meters, Stop & Start system
8	PWR HTR*2	25 A	Power heater, multiport fuel injection system/sequential multiport fuel injection system
9	EPS	50 A	Electric power steering
10	ABS NO.2	30 A	ABS, VSC
11	DEF	30 A	Rear window defogger
12	SPARE	10 A	Spare fuse
13	PTC	80 A	PTC heater, outside rear view mirror defoggers
14	HTR	40 A	Air conditioning system
15	H-LP CLN	30 A	—
16	RDI FAN	30 A	Electric cooling fan
17	ABS NO.1	50 A	ABS, VSC
18	BBC*3	40 A	Stop & Start system
19	ST	30 A	Starting system
20	AMP	15 A	—
21	D/L NO.2	25 A	Power door lock
22	D.C.C.	30 A	DOME, ECU-B NO.1
23	STR LOCK	20 A	Steering lock system

Fuse		Ampere	Circuit
24	ECU-B NO.1	5 A	Main body ECU, smart entry & start system
25	DOME	15 A	Interior lights, audio system, VSC
26	ETCS	10 A	Multiport fuel injection system/ sequential multiport fuel injection system
27	HAZ	10 A	Turn signal lights
28	AM2	7.5 A	Multiport fuel injection system/ sequential multiport fuel injection system, smart entry & start system, starting system, multi-mode manual transmission
29	ECU-B NO.2	5 A	Gauge and meters, power door lock, wireless remote control, Stop & Start system, smart entry & start system, multi-mode manual transmission, air conditioning system
30	ALT-S	7.5 A	—
31	R/I	50 A	EFI MAIN, ECD MAIN, EFI NO.2, EFI NO.3, IG2, IGN, MET, HORN
32	SPARE	20 A	Spare fuse
33	SPARE	30 A	Spare fuse
34	MIR-HTR	10 A	—
35	ID/UP	7.5 A	Multiport fuel injection system/ sequential multiport fuel injection system

*1: Vehicles with a gasoline engine

*2: Vehicles with a diesel engine

*3: Vehicles with a 1NR-FE engine (with a Stop & Start system)

Type B

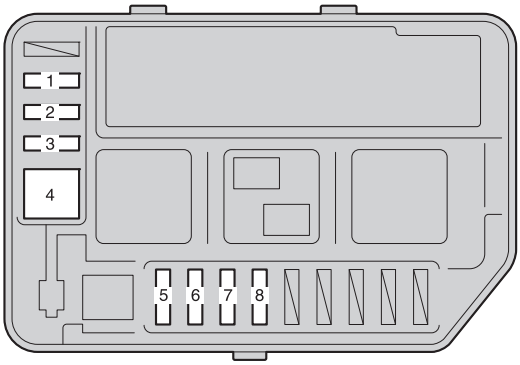

Fuse		Ampere	Circuit
1	EU-DRL	15 A	—
2	S-HORN	10 A	Multiport fuel injection system/ sequential multiport fuel injection system
3	H-LP MAIN	7.5 A	Headlights
4	MMT	50 A	Multi-mode manual transmission
5	H-LP RH HI	10 A	Right-hand headlight (high beam)
6	H-LP LH HI	10 A	Left-hand headlight (high beam), gauge and meters
7	H-LP RH LO	10 A	Right-hand headlight (low beam)
8	H-LP LH LO	10 A	Left-hand headlight (low beam), manual headlight leveling dial

Type C (vehicles with a gasoline engine)

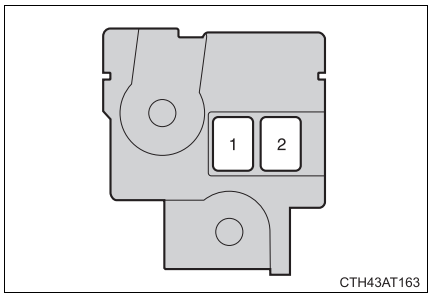

Fuse		Ampere	Circuit
1	ALT	120 A	EPS, ABS NO.2, DEF, PTC, HTR, RDI FAN, ABS NO.1, TAIL NO.2, PANEL, DOOR R/R, DOOR P, ECU-IG NO.1, ECU-IG NO.2, A/C, GAUGE, WASHER, WIPER, WIPER RR, P/W, DOOR R/L, DOOR, CIG, ACC, D/L, OBD, FOG RR, STOP, AM1, FOG FR, D-D/L, SHADE, S-HTR
2	MAIN	80 A	BBC, ST, D/L NO.2, D.C.C., STR LOCK, ETCS, HAZ, AM2, ECU-B NO.2, R/I, S-HORN, H-LP MAIN, H-LP RH HI, H-LP LH HI, H-LP RH LO, H-LP LH LO

Type C (vehicles with a diesel engine)

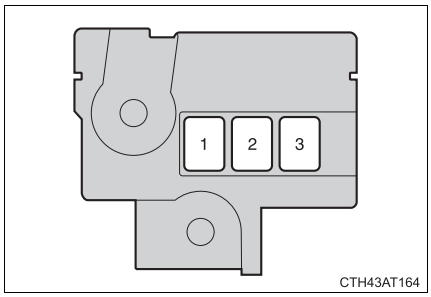

Fuse		Ampere	Circuit
1	ALT	120 A	PWR HTR, EPS, ABS NO.2, DEF, PTC, HTR, RDI FAN, ABS NO.1, TAIL NO.2, PANEL, DOOR R/R, DOOR P, ECU-IG NO.1, ECU-IG NO.2, A/C, GAUGE, WASHER, WIPER, WIPER RR, P/W, DOOR R/L, DOOR, CIG, ACC, D/L, OBD, FOG RR, STOP, AM1, FOG FR, D-D/L, SHADE, S-HTR
2	MAIN	80 A	ST, D/L NO.2, D.C.C., STR LOCK, ETCS, HAZ, AM2, ECU-B NO.2, R/I, H-LP MAIN, H-LP RH HI, H-LP LH HI, H-LP RH LO, H-LP LH LO, MMT
3	GLOW DC/DC	80 A	Engine glow system

Under the instrument panel

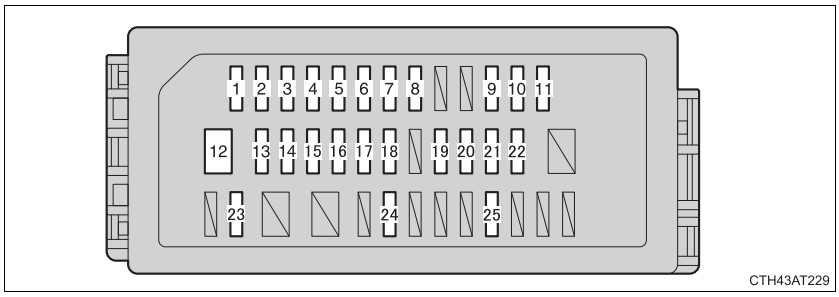

Fuse		Ampere	Circuit
1	TAIL NO.2	10 A	Front position lights, tail lights, license plate lights, front fog lights, rear fog light, multiport fuel injection system/sequential multiport fuel injection system, gauge and meters
2	PANEL	5 A	Gauge and meters, instrument panel lights, switch illumination
3	DOOR R/R	20 A	Power windows
4	DOOR P	20 A	Power windows
5	ECU-IG NO.1	5 A	Electric cooling fan, rear window defogger, electric power steering, main body ECU, windshield wipers, VSC
6	ECU-IG NO.2	5 A	ABS, VSC, Stop & Start system
7	A/C	7.5 A	Air conditioning system, power heater, rear window defogger, outside rear view mirror defoggers
8	GAUGE	10 A	Back-up light, shift lock control system, rear seat belt reminder lights, auto anti-glare inside rear view mirror, Multidrive, audio system, panoramic roof shade, multiport fuel injection system/sequential multiport fuel injection system, rain sensor

Fuse		Ampere	Circuit
9	WASHER	15 A	Windshield washer
10	WIPER	20 A	Windshield wipers
11	WIPER RR	15 A	Rear window wiper
12	P/W	30 A	Power windows
13	DOOR R/L	20 A	Power windows
14	DOOR	20 A	Power windows
15	CIG	15 A	Power outlets
16	ACC	5 A	Main body ECU, outside rear view mirrors, audio system, Stop & Start system, shift lock control system
17	D/L	25 A	Power door lock system
18	OBD	7.5 A	On-board diagnosis system
19	FOG RR	7.5 A	Rear fog light, gauge and meters
20	STOP	7.5 A	Multiport fuel injection system/ sequential multiport fuel injection system, smart entry & start system, ABS, VSC, multi-mode manual transmission, stop lights, high mounted stoplight, shift lock control system
21	AM1	7.5 A	Starting system
22	FOG FR	15 A	Front fog lights, gauge and meters
23	D-D/L	25 A	Multiport fuel injection system/ sequential multiport fuel injection system
24	SHADE	25 A	Panoramic roof shade
25	S-HTR	15 A	Seat heaters

■ **After a fuse is replaced**

- If the lights do not turn on even after the fuse has been replaced, a bulb may need replacement. (→P. 422)
- If the replaced fuse blows again, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

■ **If there is an overload in a circuit**

The fuses are designed to blow, protecting the wiring harness from damage.

■ **When replacing light bulbs**

Toyota recommends that you use genuine Toyota products designed for this vehicle.
Because certain bulbs are connected to circuits designed to prevent overload, non-genuine parts or parts not designed for this vehicle may be unusable.

CAUTION

■ **To prevent system breakdowns and vehicle fire**

Observe the following precautions.
Failure to do so may cause damage to the vehicle and possibly a fire or injury.

- Never use a fuse of a higher amperage rating than that indicated, or use any other object in place of a fuse.
- Always use a genuine Toyota fuse or equivalent.
  Never replace a fuse with a wire, even as a temporary fix.
- Do not modify the fuses or fuse boxes.

NOTICE

■ **Before replacing fuses**

Have the cause of electrical overload determined and repaired by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional as soon as possible.

Light bulbs

You may replace the following bulbs by yourself. The difficulty level of replacement varies depending on the bulb. If necessary bulb replacement seems difficult to perform, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

For more information about replacing other light bulbs, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

■ Preparing for light bulb replacement

Check the wattage of the light bulb to be replaced. (→P. 532)

■ Front bulb locations

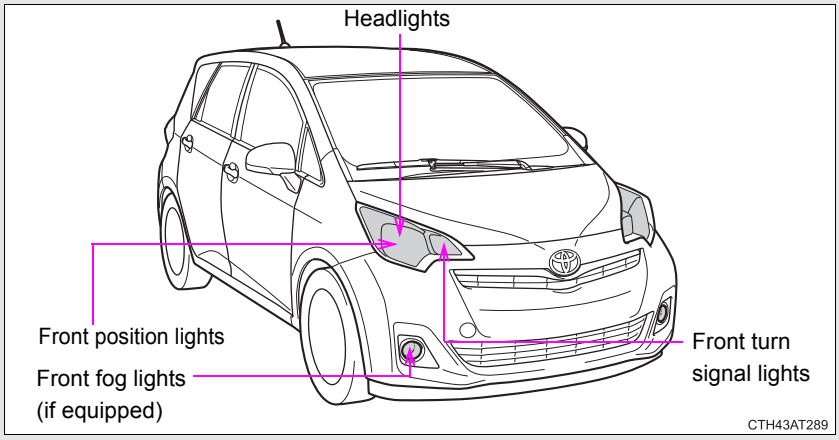

Rear bulb locations

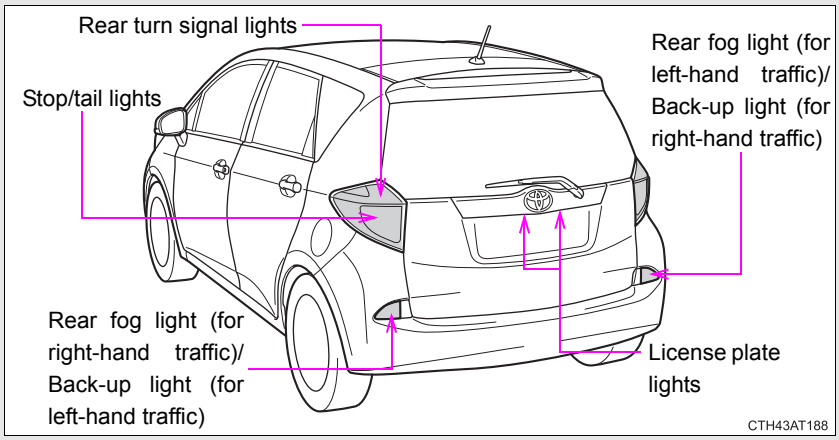

Replacing light bulbs

Headlights

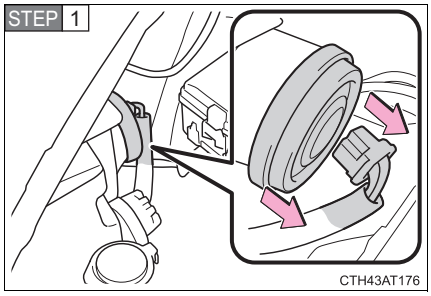

Unplug the connector and remove the rubber cover.

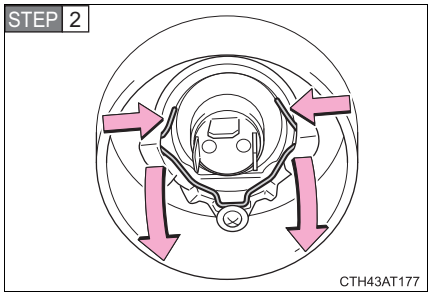

Release the bulb retaining spring.

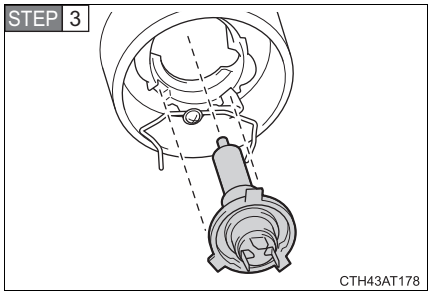

Remove the bulb.

To install a new bulb, align the tabs of the bulb with the cutouts of the mounting hole.

■ Front fog lights (if equipped)

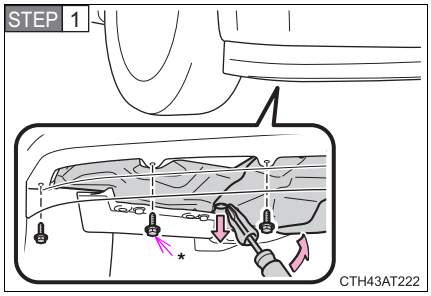

Vehicles without a front spoiler

Remove the 2 screws and a clip.

Vehicles with a front spoiler

Remove the 3 screws and a clip.

The front spoiler will come off on that side when the screws are removed.

*: Vehicles with a front spoiler only

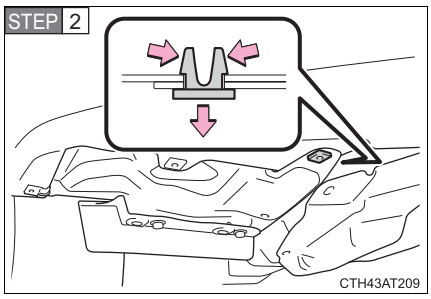

Remove the grommet.

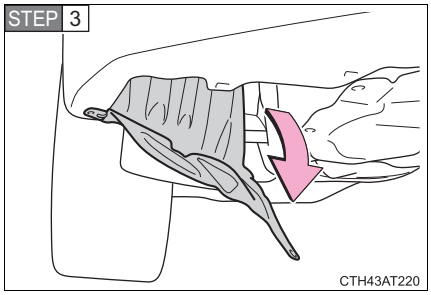

Partly remove the fender liner.

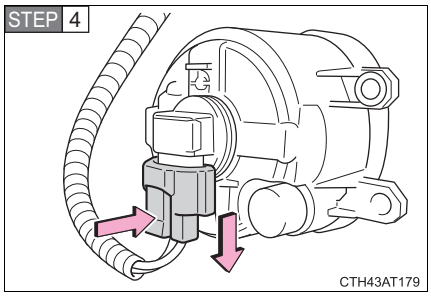

Unplug the connector while depressing the lock release.

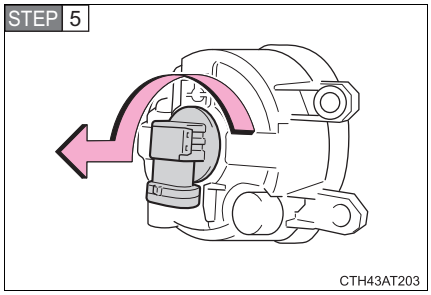

Turn the bulb base counterclockwise.

■ Front position lights

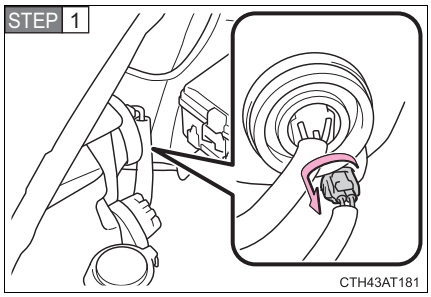

Turn the bulb base counterclockwise.

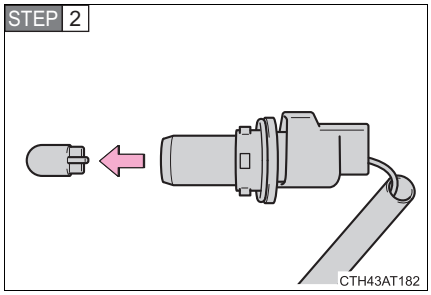

Remove the light bulb.

■ **Front turn signal lights**

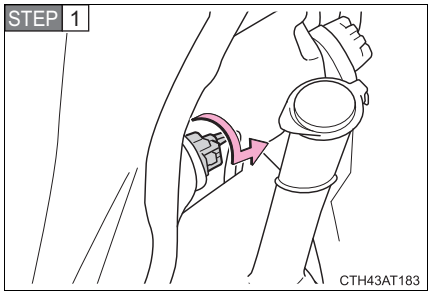

Turn the bulb base counterclockwise.

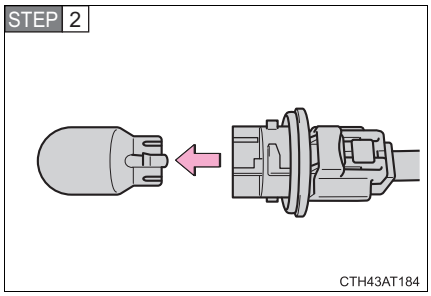

Remove the light bulb.

■ Stop/tail lights and rear turn signal lights

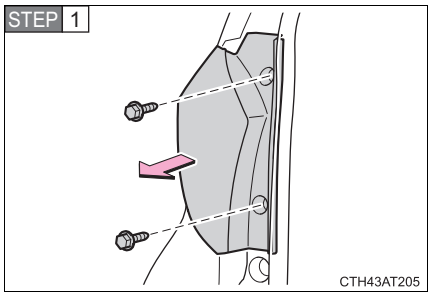

Open the back door and remove the bolts and lamp assembly.

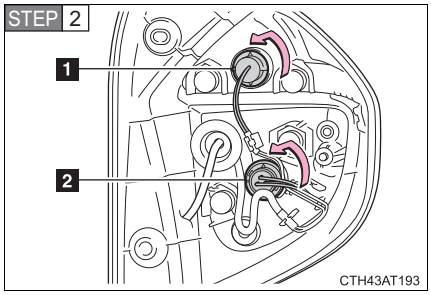

Turn the bulb base counterclockwise.

1 Rear turn signal light

2 Stop/tail light

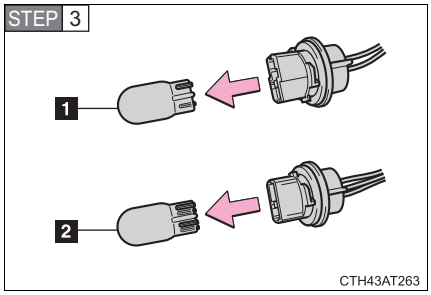

Remove the light bulb.

1 Rear turn signal light

2 Stop/tail light

■ Back-up light/rear fog light

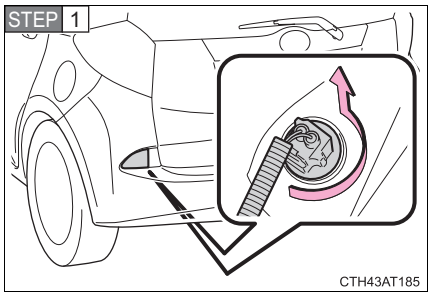

Turn the bulb base counterclockwise.

Rear fog light

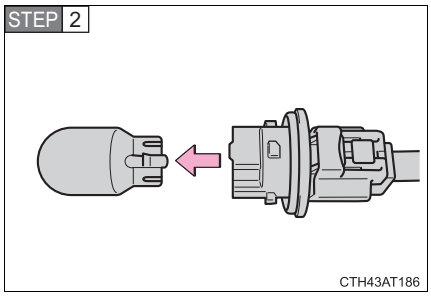

Remove the light bulb.

Back-up light

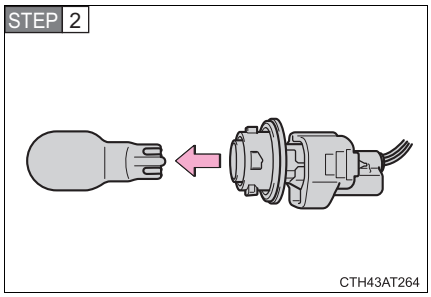

Remove the light bulb.

License plate lights

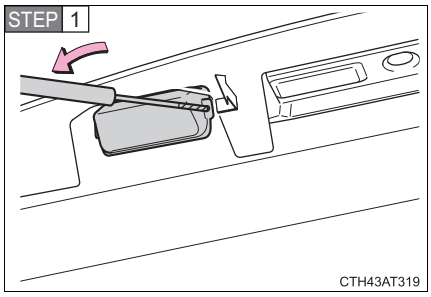

Remove the cover.

Insert a properly sized screwdriver into the hole of the cover, and ply off the cover as shown in the illustration.

To prevent damaging the vehicle, wrap the screwdriver with a tape.

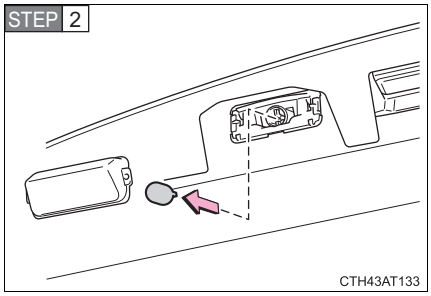

Remove the light bulb.

Lights other than the above

If any of the lights listed below has burnt out, have it replaced by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

- Side turn signal lights
- High mounted stoplight

■ **LED light bulbs**

The high mounted stoplight consists of a number of LEDs. If any of the LEDs burn out, take your vehicle to any authorized Toyota dealer or repairer, or another duly qualified and equipped professional to have the light replaced.

■ **Condensation build-up on the inside of the lens**

Temporary condensation build-up on the inside of the headlight lens does not indicate a malfunction.
Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for more information in the following situations:

- Large drops of water have built up on the inside of the lens.
- Water has built up inside the headlight.

■ **When replacing light bulbs**

→P. 421

⚠ CAUTION

■ **Replacing light bulbs**

- Turn off the lights. Do not attempt to replace the bulb immediately after turning off the lights.
  The bulbs become very hot and may cause burns.
- Do not touch the glass portion of the light bulb with bare hands. When it is unavoidable to hold the glass portion, use and hold with a clean dry cloth to avoid getting moisture and oils on the bulb.
  Also, if the bulb is scratched or dropped, it may blow out or crack.
- Fully install light bulbs and any parts used to secure them. Failure to do so may result in heat damage, fire, or water entering the headlight unit. This may damage the headlights or cause condensation to build up on the lens.

■ **To prevent damage or fire**

Make sure bulbs are fully seated and locked.

When trouble arises

5

5-1. Essential information

Emergency flashers 432

If your vehicle needs to be towed 433

If you think something is wrong 441

Fuel pump shut off system 442

5-2. Steps to take in an emergency

If a warning light turns on or a warning buzzer sounds... 443

If you have a flat tire (vehicles with a spare tire) 456

If you have a flat tire (vehicles with an emergency tire puncture repair kit)..... 469

If the engine will not start 486

If the shift lever cannot be shifted from P 489

If the shift lever cannot be shifted 490

If you lose your keys 491

If the electronic key does not operate properly 492

If the battery is discharged 497

If your vehicle overheats 505

If you run out of fuel and the engine stalls..... 510

If the vehicle becomes stuck 512

If your vehicle has to be stopped in an emergency..... 514

Emergency flashers

Use the emergency flashers if the vehicle malfunctions or is involved in an accident.

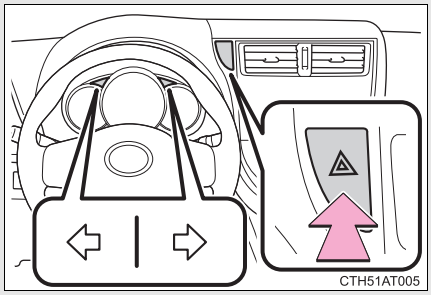

Press the switch to flash all the turn signal lights. To turn them off, press the switch once again.

NOTICE

■ **To prevent battery discharge**

Do not leave the emergency flashers on longer than necessary when the engine is not running.

If your vehicle needs to be towed

If towing is necessary, we recommend having your vehicle towed by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, such as a commercial towing service, using a lift-type truck or flatbed truck.
Use a safety chain system for all towing, and abide by all state/provincial and local laws.

Before towing

The following may indicate a problem with your transmission. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional before towing.

- The engine is running but the vehicle will not move.
- The vehicle makes an abnormal sound.

Emergency towing

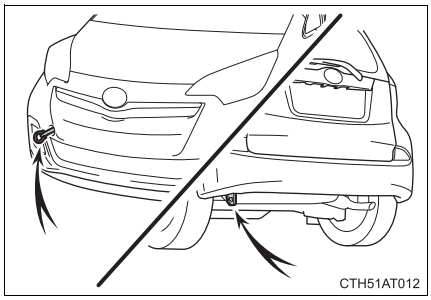

If a tow truck is not available in an emergency, your vehicle may be temporarily towed using a cable or chain secured to the emergency towing eyelet(s). This should only be attempted on hard surfaced roads for short distances at low speeds.
A driver must be in the vehicle to steer and operate the brakes. The vehicle's wheels, drive train, axles, steering and brakes must be in good condition.

For vehicles with a Multidrive, only the front towing eyelet may be used.

Installing towing eyelet

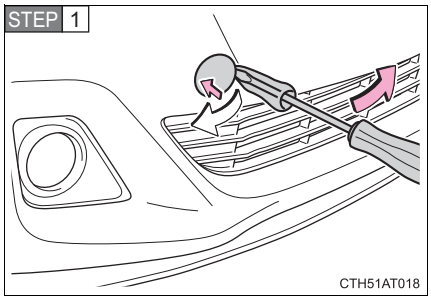

Press and hold the left side of the eyelet cover while removing the cover with a flathead screwdriver.

To protect the bodywork, place a rag between the screwdriver and the vehicle body as shown in the illustration.

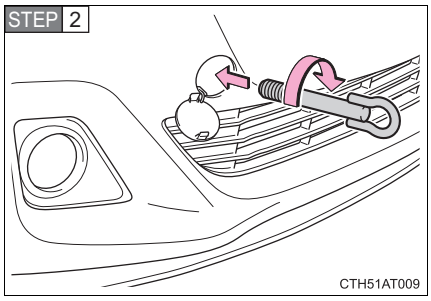

Insert the towing eyelet into the hole and tighten partially by hand.

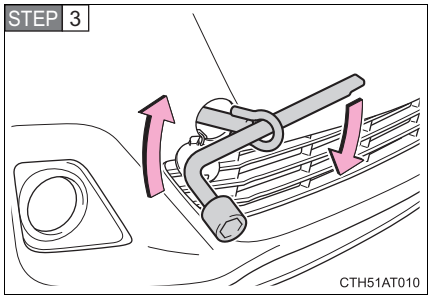

Tighten down the towing eyelet securely using a wheel nut wrench.

Towing with a sling-type truck

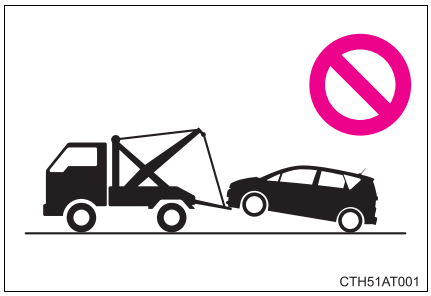

Do not tow with a sling-type truck to prevent body damage.

Towing with a wheel-lift type truck

From the front

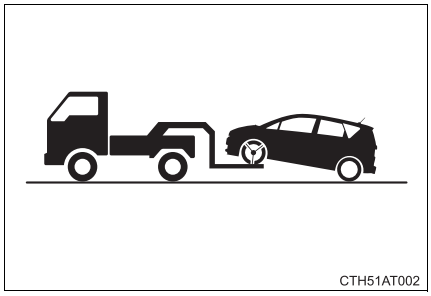

Release the parking brake.

From the rear

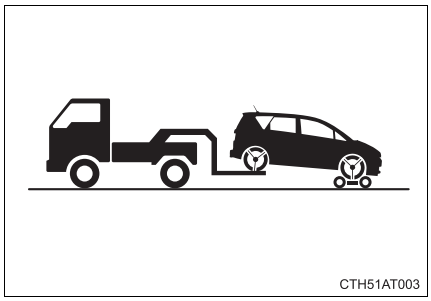

Vehicles with a Multidrive: Use a towing dolly under the front wheels.

Except vehicles with a Multidrive: We recommend using a towing dolly under the front wheels.

Vehicles without a smart entry & start system: When not using a towing dolly, turn the engine switch to the “ON” position (vehicles with a multi-mode manual transmission) or the “ACC” position (vehicles with a manual transmission) and shift the shift lever to N.

Vehicles with a smart entry & start system: When not using a towing dolly, turn the “ENGINE START STOP” switch to IGNITION ON mode (vehicles with a multi-mode manual transmission) or ACCESSORY mode (vehicles with a manual transmission) and shift the shift lever to N.

Using a flatbed truck

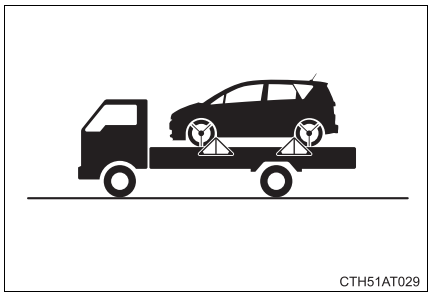

If you use chains or cables to tie down your vehicle, the angles shaded in black must be 45°.

Do not overly tighten the tie downs or the vehicle may be damaged.

Before emergency towing

STEP 1 Release the parking brake.

STEP 2 Shift the shift lever to N.

STEP 3 Vehicles without a smart entry & start system: Turn the engine switch to the “ACC” (engine off) or “ON” (engine running) position.

Vehicles with a smart entry & start system: Turn the “ENGINE START STOP” switch to ACCESSORY (engine off) or IGNITION ON (engine running) mode.

Emergency towing eyelet location

The emergency towing eyelet is in the tool tray (vehicles with a spare tire) or the tool box (vehicles with an emergency tire puncture repair kit).
(→P. 456, 469)

CAUTION

■ **Caution while towing**

- Use extreme caution when towing the vehicle.
  Avoid sudden starts or erratic driving maneuvers which place excessive stress on the emergency towing eyelets and the cables or chains. Always be cautious of the surroundings and other vehicles while towing.
- Vehicles with a smart entry & start system: Do not turn the “ENGINE START STOP” switch off.
  Doing so will lock the steering wheel and prevent operation, possibly causing an accident and resulting in death or serious injury.
- If the engine is not running, the power assist for the brakes and steering will not function, making steering and braking more difficult.

■ **Installing towing eyelet to the vehicle**

Make sure that towing eyelet is installed securely.
If not securely installed, towing eyelet may come loose during towing. This may lead to accidents that cause serious injury or even death.

NOTICE

■ **To prevent causing serious damage to the transmission when towing using a wheel-lift type truck (vehicles with a Multidrive)**

Never tow this vehicle from the rear with the front wheels on the ground.

■ **To prevent causing serious damage to the Stop & Start system when towing (vehicles with Stop & Start system)**

Never tow this vehicle with four wheels on the ground. Use a flatbed truck, or lift up front or rear of the vehicle by using a wheel-lift type truck.

■ **To prevent damage to the vehicle when towing using a wheel-lift type truck (vehicles with a Multidrive)**

When raising the vehicle, ensure adequate ground clearance for towing at the opposite end of the raised vehicle. Without adequate clearance, the vehicle could be damaged while being towed.

■ **To prevent damage to the vehicle when towing using a wheel-lift type truck (except vehicles with a Multidrive)**

- Vehicles without a smart entry & start system: Do not tow the vehicle from the rear when the engine switch is in the “LOCK” position or the key is removed. The steering lock mechanism is not strong enough to hold the front wheels straight.
- Vehicles with a smart entry & start system: Do not tow the vehicle from the rear when the “ENGINE START STOP” switch is off. The steering lock mechanism is not strong enough to hold the front wheels straight.
- When raising the vehicle, ensure adequate ground clearance for towing at the opposite end of the raised vehicle. Without adequate clearance, the vehicle could be damaged while being towed.

■ **To prevent body damage when towing with a sling-type truck**

Do not tow with a sling-type truck, either from the front or rear.

■ **To prevent causing serious damage to the transmission in emergency towing**

Vehicles with a Multidrive, never tow a vehicle from the rear with four wheels on the ground. This may cause serious damage to the transmission.

If you think something is wrong

If you notice any of the following symptoms, your vehicle probably needs adjustment or repair. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional as soon as possible.

Visible symptoms

- Fluid leaks under the vehicle
  (Water dripping from the air conditioning after use is normal.)
- Flat-looking tires or uneven tire wear
- High engine coolant temperature warning light flashes or comes on
- Low engine coolant temperature indicator comes on or does not come on continuously

Audible symptoms

- Changes in exhaust sound
- Excessive tire squeal when cornering
- Strange noises related to the suspension system
- Pinging or other noises related to the engine

Operational symptoms

- Engine missing, stumbling or running roughly
- Appreciable loss of power
- Vehicle pulls heavily to one side when braking
- Vehicle pulls heavily to one side when driving on a level road
- Loss of brake effectiveness, spongy feeling, pedal almost touches the floor

Fuel pump shut off system (gasoline engine only)

To minimize the risk of fuel leakage when the engine stalls or when an airbag inflates upon collision, the fuel pump shut off system stops the supply of fuel to the engine.

Follow the procedure below to restart the engine after the system is activated.

Vehicles without a smart entry & start system

STEP 1 Turn the engine switch to the “ACC” or “LOCK” position.

STEP 2 Restart the engine.

Vehicles with a smart entry & start system

STEP 1 Turn the “ENGINE START STOP” switch to ACCESSORY mode or turn it off.

STEP 2 Restart the engine.

NOTICE

■ **Before starting the engine**

Inspect the ground under the vehicle.
If you find that fuel has leaked onto the ground, the fuel system has been damaged and is in need of repair. Do not restart the engine.

If a warning light turns on or a warning buzzer sounds...

Calmly perform the following actions if any of the warning lights comes on or flashes. If a light comes on or flashes, but then goes off, this does not necessarily indicate a malfunction in the system. However, if this continues to occur, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Stop the vehicle immediately. Continuing to drive the vehicle may be dangerous.

The following warning indicates a possible problem in the brake system. Immediately stop the vehicle in a safe place and contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Warning light	Warning light/Details
	Brake system warning light (warning buzzer)* • Low brake fluid • Malfunction in the brake system This light also comes on when the parking brake is not released. If the light turns off after the parking brake is fully released the system is operating normally.

*: Parking brake engaged warning buzzer:
The buzzer sounds to indicate that the parking brake is still engaged (with the vehicle having reached a speed of 5 km/h [3 mph]).

Stop the vehicle immediately.

- The following warnings indicate the possibility of damage to the vehicle that may lead to an accident. Immediately stop the vehicle in a safe place and contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Warning light	Warning light/Details
	Charging system warning light Indicates a malfunction in the vehicle's charging system.
	Low engine oil pressure warning light Indicates that the engine oil pressure is too low.
(Flashes or comes on)	**High engine coolant temperature warning light** Indicates that the engine is almost overheating. (→P. 505)

- The following warning indicates the possibility of damage to the vehicle that may lead to an accident. Immediately stop the vehicle in a safe place and take the specified steps to correct the suspected problem.

Warning light	Warning light/Details	Correction procedure
(Comes on) (if equipped)	**Multi-mode manual transmission warning light** Indicates a malfunction in the multi-mode manual transmission system.	Have the system checked by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
	Multi-mode manual transmission warning light (warning buzzer) Indicates a malfunction in the multi-mode manual transmission system and that the clutch has become hot due to excessive load.	Pull over and shift the shift lever to N. Wait for about 15 minutes for the clutch to cool down. Have the system checked by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

- Immediately stop the vehicle in a safe place and take the specified steps to correct the suspected problem.

Warning light	Warning light/Details	Correction procedure
(Flashes) (if equipped)	**Heat clutch warning light (warning buzzer)** Indicates that the clutch has become hot, but does not indicate a malfunction in the multi-mode manual transmission system.	Pull over and shift the shift lever to N. Wait for about 15 minutes for the clutch to cool down.

■ **To prevent the clutch from overheating**

- Do not use the accelerator pedal or starting assist system to hold the vehicle on a hill.
- On an uphill incline, observe the following whenever possible:
  - Maintain a safe distance from the vehicle ahead and avoid unnecessary starting off and stopping.
  - Avoid using E mode on an uphill slope. This will help to avoid unnecessary gear changes.

Have the vehicle inspected immediately.

Failure to investigate the cause of the following warnings may lead to the system operating abnormally and possibly cause an accident. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.

Warning light	Warning light/Details
	Malfunction indicator lamp Indicates a malfunction in: • The electronic engine control system; • The electronic throttle control system; • The electronic Multidrive control system (if equipped); • The electronic multi-mode manual transmission control system (if equipped); • The emission control system; or • The DPF catalytic converter (if equipped).
	SRS warning light Indicates a malfunction in: • The SRS airbag system; or • The seat belt pretensioner system.
	ABS warning light Indicates a malfunction in: • The ABS; or • The brake assist system.
	Electric power steering warning light (warning buzzer) Indicates a malfunction in the EPS system.
OFF (Flashes)	**Stop & Start cancel indicator light (if equipped)** Indicates a malfunction in the Stop & Start system.
	Slip indicator light Indicates a malfunction in: • The VSC system; • The TRC system; or • The VSC+ system

Warning light	Warning light/Details
	Fuel filter warning light (diesel engine only) Indicate that the amount of accumulated water in the fuel filter has reached the specified level.
(Flashes)	**Cruise control indicator light (if equipped)** Indicates a malfunction in the cruise control system.
(Flashes in yellow for 15 seconds.)	**Smart entry & start system indicator light (If equipped)** Indicates a malfunction in the smart entry & start system.

Follow the correction procedures.

After taking the specified steps to correct the suspected problem, check that the warning light goes off.

Warning light	Warning light/Details	Correction procedure
	Open door warning light (warning buzzer)*1 Indicates that a door is not fully closed.	Check that all doors are closed.
	Low fuel level warning light Gasoline engine: Indicates that remaining fuel is about 5.8 L (1.5 gal., 1.3 Imp. gal.) or less. Diesel engine: Indicates that remaining fuel is about 6.4 L (1.7 gal., 1.4 Imp. gal.) or less.	Refuel the vehicle.

Warning light	Warning light/Details	Correction procedure
(On the instrument cluster)	**Driver's and front passenger's seat belt reminder light (warning buzzer)*2** Warns the driver and front passenger to fasten their seat belts.	Fasten the seat belt.
(On the center panel)	**Rear passengers' seat belt reminder lights (warning buzzer)*2** Warns the rear passengers to fasten their seat belts.	Fasten the seat belt.
	Low engine oil level warning light (diesel engine only) Indicates that engine oil level is low.	Check the level of engine oil, and add if necessary.

Warning light	Warning light/Details	Correction procedure
	DPF system warning light (diesel engine only) • Indicates that the DPF catalytic converter needs to be cleaned due to repeated short trips and/or low-speed driving. • Indicates that the amount of accumulated deposits in the DPF catalytic converter has reached the specified level.	To clean the DPF catalytic converter, drive the vehicle at a speed of 65 km/h (40 mph) or greater for 20 to 30 minutes as much as possible until the DPF system warning light turns off.*3 Do not turn off the engine as much as possible until the DPF system warning light turns off. If it is not possible to drive the vehicle at speeds of 65 km/h (40 mph) or greater, or the DPF system warning light does not turn off even after driving for more than 30 minutes, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
(Flashes)	**Engine oil change reminder light (diesel engine only)** Indicates that the engine oil is scheduled to be changed. Flashes approximately 14500 km (9000 miles) after the engine oil is changed. (→P. 454) (The indicator will not work properly unless the oil maintenance date has been reset).	Check the engine oil, and change if necessary. After changing the engine oil, the oil change system should be reset. (→P. 382)

Warning light	Warning light/Details	Correction procedure
(Comes on)	**Engine oil change reminder light (diesel engine only)** Indicates that the engine oil should be changed. Comes on approximately 15000 km (9300 miles) after the engine oil is changed (and the oil maintenance data has been reset).	Check and change the engine oil and oil filter by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional. After changing the engine oil, the oil change system should be reset. (→P. 382)

*1: Open door warning buzzer:
A buzzer will sound if the vehicle reaches a speed of 5 km/h (3 mph) or more with any door open.

*2: Driver's and passengers seat belt reminders:
The driver's and passengers seat belt buzzer sounds to alert the driver and passengers that their seat belt is not fastened. The buzzer sounds once when the vehicle reaches a speed of 20 km/h (12 mph). Then, if the seat belt is still unfastened after 30 seconds elapse, the buzzer will sound intermittently for 30 seconds, followed by a different tone for 90 more seconds.

*3: The DPF system warning light may not turn off when the engine oil change reminder light is on. In this event, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Follow the correction procedures. (vehicles with a smart entry & start system)

After taking the specified steps to correct the suspected problem, check that the warning light goes off.

Interior buzzer	Exterior buzzer	Warning light	Warning light/Details	Correction procedure
Continuous	Continuous	(Flashes in yellow)	**Smart entry & start system indicator light (vehicles with a Multidrive)** The electronic key was carried outside the vehicle and the driver's door was opened and closed while any shift position other than P was selected without turning off the "ENGINE START STOP" switch.	• Change the shift position to P. • Bring the electronic key back into the vehicle.
Once	3 times	(Flashes in yellow)	**Smart entry & start system indicator light** Vehicles with a Multidrive: The electronic key was carried outside the vehicle and the driver's door was opened and closed while the shift position P was selected without turning off the "ENGINE START STOP" switch. Except vehicle with a Multidrive: The electronic key was carried outside the vehicle and a door other than the driver's door was opened and closed while the "ENGINE START STOP" switch was in a mode other than off.	Turn the "ENGINE START STOP" switch off or bring the electronic key back into the vehicle.

Interior buzzer	Exterior buzzer	Warning light	Warning light/Details	Correction procedure
Once	3 times	(Flashes in yellow)	**Smart entry & start system indicator light** Indicates that a door other than the driver's door has been opened and closed with the "ENGINE START STOP" switch in any mode other than off and the electronic key outside of the detection area.	Confirm the location of the electronic key.
Once	Continuous (10 seconds)	(Flashes in yellow)	**Smart entry & start system indicator light** An attempt was made to exit the vehicle with the electronic key and lock the doors without first turning the "ENGINE START STOP" switch off.	Turn the "ENGINE START STOP" switch off and lock the doors again.
Once	—	(Flashes in yellow for 15 seconds.)	**Smart entry & start system indicator light** Indicates that the electronic key is not present when attempting to start the engine.	Confirm the location of the electronic key.
9 times	—	(Flashes in yellow)	**Smart entry & start system indicator light** An attempt was made to drive when the regular key was not inside the vehicle.	Confirm that the electronic key is inside the vehicle.
Once	—	(Flashes in yellow for 15 seconds.)	**Smart entry & start system indicator light** Indicates that the electronic key battery is low.	Replace the battery. (→P. 402)

Interior buzzer	Exterior buzzer	Warning light	Warning light/Details	Correction procedure
Once	—	(Flashes quickly in green for 15 seconds.)	**Smart entry & start system indicator light** Indicates that the steering lock has not been released.	Release the steering lock. (→P. 183)
Once	—	(Flashes in yellow for 30 seconds.)	**Smart entry & start system indicator light** • When the doors were unlocked with the mechanical key and then the “ENGINE START STOP” switch was pressed, the electronic key could not be detected in the vehicle. • The electronic key could not be detected in the vehicle even after the “ENGINE START STOP” switch was pressed two consecutive times.	Except vehicles with a manual transmission: Touch the electronic key to the “ENGINE START STOP” switch while depressing the brake pedal. Vehicles with a manual transmission: Touch the electronic key to the “ENGINE START STOP” switch while depressing with the clutch pedal.

■ **If the malfunction indicator lamp comes on while driving**

For some models, the malfunction indicator lamp will come on if the fuel tank becomes completely empty. If the fuel tank is empty, refuel the vehicle immediately. The malfunction indicator lamp will go off after several trips.

If the malfunction indicator lamp does not go off, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, as soon as possible.

■ **Passenger detection sensor and passenger seat belt reminder**

- If luggage is placed on a passenger seat, the passenger detection sensor may cause the warning light to flash even if a passenger is not sitting in the seat.
- If a cushion is placed on the seat, the sensor may not detect a passenger, and the warning light may not operate properly.

■ **If the engine oil change reminder light flashes (diesel engine only)**

Repeated short trips and/or low-speed driving may cause the oil to degrade sooner than usual, regardless of the actual distance driven. If this happens, the engine oil change reminder light will flash.

■ **Engine oil change reminder light comes on (diesel engine only)**

Replace the engine oil and oil filter when the engine oil change reminder light does not come on even if you have driven over 15000 km (9300 miles) after the engine oil was changed.

There is a possibility that the engine oil change reminder light has been illuminated when you have driven less than 15000 km (9300 miles) based on a usage or driving condition.

■ **Electric power steering warning light (warning buzzer)**

The electric power steering warning light may come on and the warning buzzer may sound when the voltage is low or the voltage drops.

CAUTION

■ **When the electric power steering system warning light comes on**

The steering wheel may become extremely heavy.
If the steering wheel becomes heavier than usual when operating, hold firmly and operate using more force than usual.

■ **When driving to clean the DPF catalytic converter (diesel engine only)**

When driving, pay sufficient attention to weather, road conditions, terrain and traffic conditions, and be sure to observe traffic laws and/or regulations. Failure to do so may cause an unexpected accident, resulting in death or serious injury.

NOTICE

■ **If the fuel filter warning light comes on (diesel engine only)**

Never drive the vehicle with the warning light on. Continued driving with water accumulated in the fuel filter will damage the fuel injection pump.

■ **When the DPF system warning light comes on (diesel engine only)**

If the DPF system warning light is left on without performing cleaning, after an additional 100 to 300 km (62 to 187 miles), the malfunction indicator lamp may come on. If this happens, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.

If you have a flat tire (vehicles with a spare tire)

Remove the flat tire and replace it with the spare tire provided.

Before jacking up the vehicle

- Stop the vehicle on a hard, flat surface.
- Set the parking brake.
- Vehicles with a Multidrive: Shift the shift lever to P.
- Vehicles with a multi-mode manual transmission: Shift the shift lever to M, E or R.
- Vehicles with a manual transmission: Shift the shift lever to R.
- Stop the engine.
- Turn on the emergency flashers.

Location of the spare tire, jack and tools

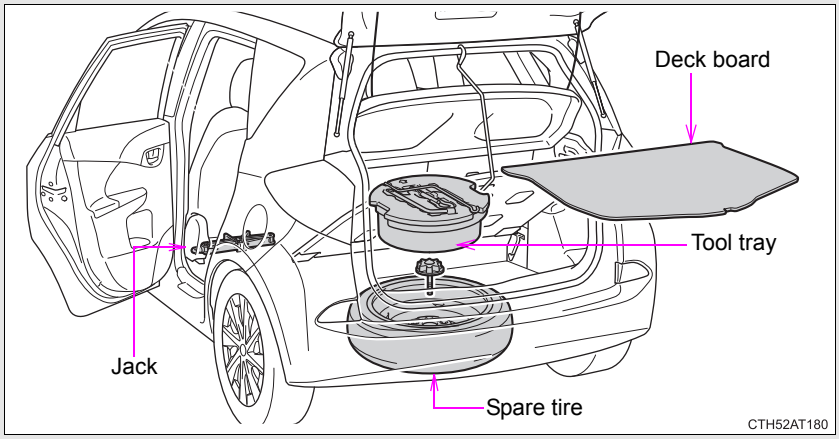

Taking out the jack

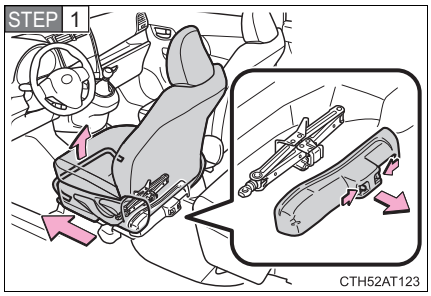

Move the front left seat to the front most position and remove the cover.

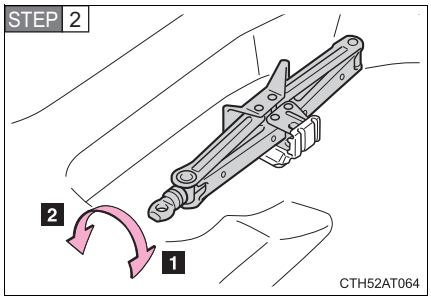

1 Tighten

2 Loosen

Taking out the spare tire

Without auxiliary box

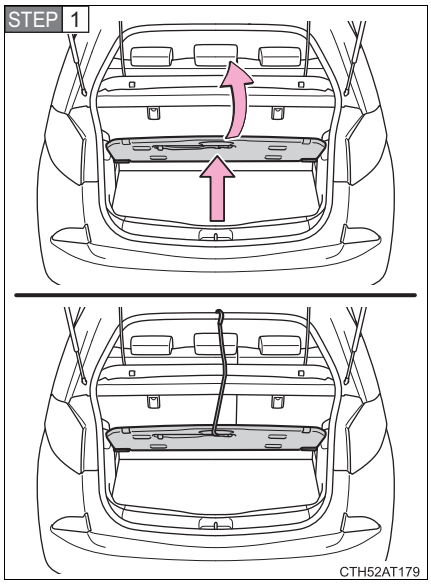

Lift the dual-level deck board and attach the hook. (→P. 357)

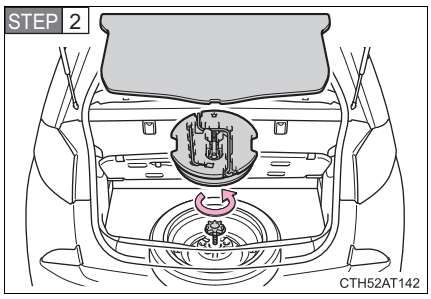

Remove the deck board and tool tray.

Loosen the center fastener that secures the spare tire.

With auxiliary box

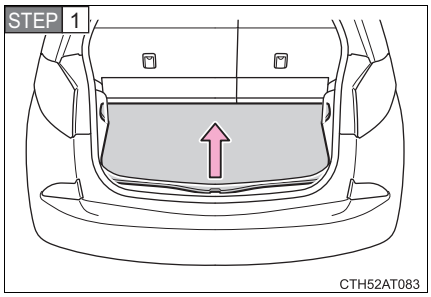

Remove the deck board.

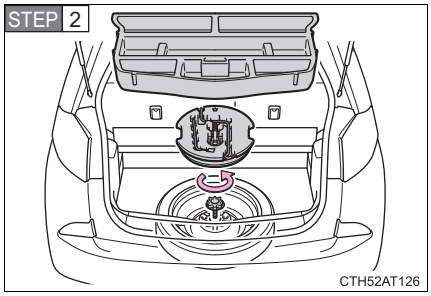

Remove the auxiliary box and tool tray.

Loosen the center fastener that secures the spare tire.

Replacing a flat tire

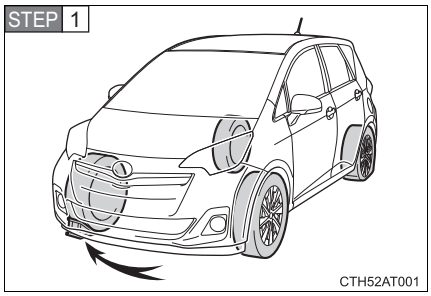

Chock the tires.

Flat tire		Wheel chock positions
Front	Left-hand side	Behind the rear right-hand side tire
	Right-hand side	Behind the rear left-hand side tire
Rear	Left-hand side	In front of the front right-hand side tire
	Right-hand side	In front of the front left-hand side tire

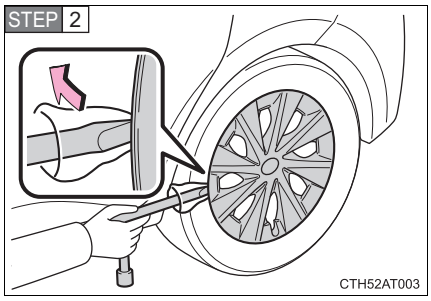

Vehicles with a steel wheel: Remove the wheel ornament using the wrench.

To protect the wheel ornament, place a rag between the wrench and the wheel ornament, as shown in the illustration.

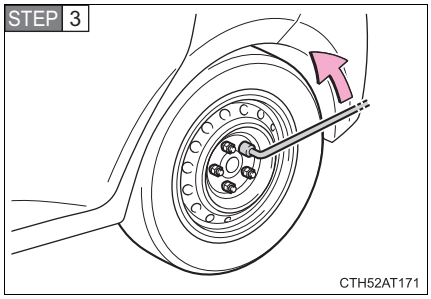

Slightly loosen the wheel nuts (one turn).

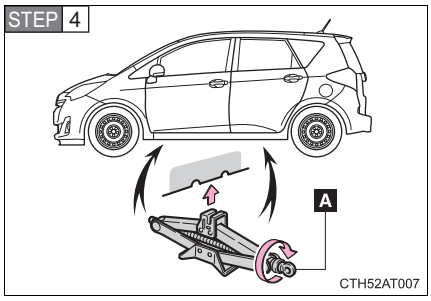

Turn the tire jack portion “A” by hand until the notch of the jack is in contact with the jack point.

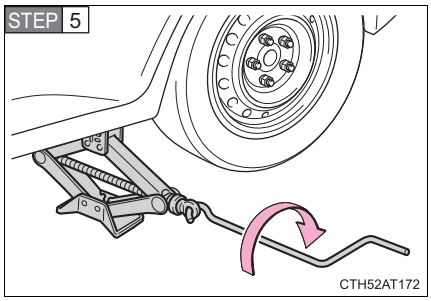

Raise the vehicle until the tire is slightly raised off the ground.

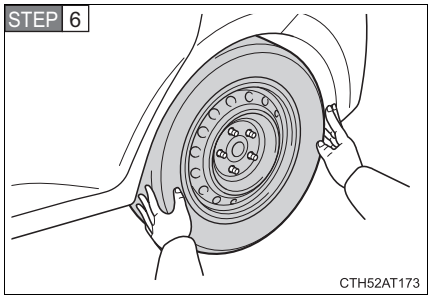

Remove all the wheel nuts and the tire.

When resting the tire on the ground, place the tire so that the wheel design faces up to avoid scratching the wheel surface.

Installing the tire

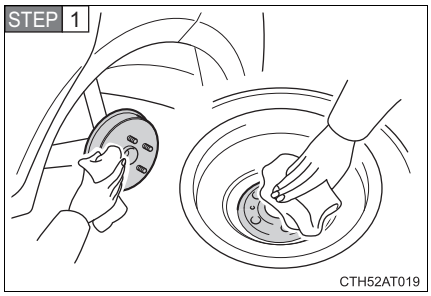

Remove any dirt or foreign matter from the wheel contact surface.

If foreign matter is on the wheel contact surface, the wheel nuts may loosen while the vehicle is in motion, causing the tire to come off.

STEP 2 Install the tire and loosely tighten each wheel nut by hand by approximately the same amount.

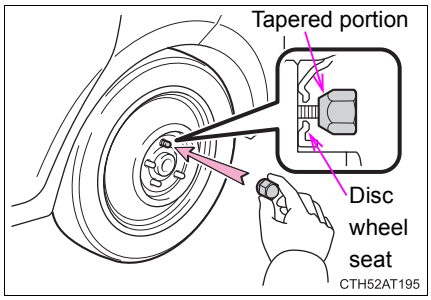

When replacing a steel wheel with a compact spare tire, tighten the wheel nuts until the tapered portion comes into loose contact with the disc wheel seat.

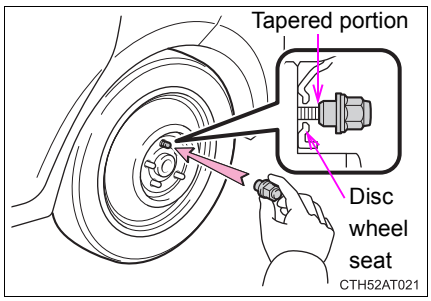

When replacing an aluminum wheel with a compact spare tire, tighten the wheel nuts until the tapered portion comes into loose contact with the disc wheel seat.

STEP 3

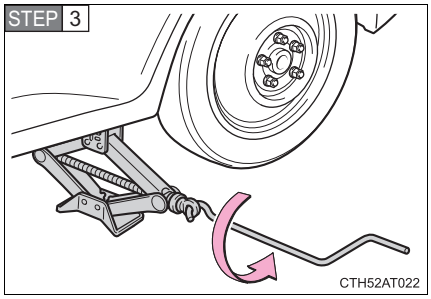

Lower the vehicle.

STEP 4

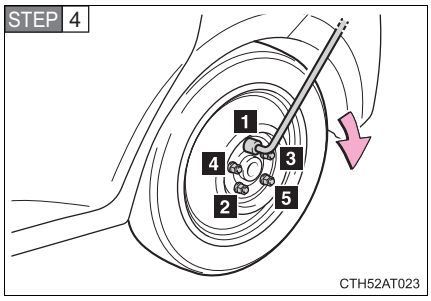

Firmly tighten each wheel nut two or three times in the order shown in the illustration.

Tightening torque:
103 N•m (10.5 kgf•m, 76 ft•lbf)

STEP 5 Stow the flat tire, tire jack and all tools.

■ **The compact spare tire**

- The compact spare tire is identified by the label “TEMPORARY USE ONLY” on the tire sidewall.
  Use the compact spare tire temporarily, and only in an emergency.
- Make sure to check the tire inflation pressure of the compact spare tire. (→P. 531)

■ **If you have a flat front tire on a road covered with snow or ice**

Install the compact spare tire on one of the rear wheels of the vehicle. Perform the following steps and fit tire chains to the front tires:

STEP 1 Replace a rear tire with the compact spare tire.

STEP 2 Replace the flat front tire with the tire removed from the rear of the vehicle.

STEP 3 Fit tire chains to the front tires.

■ **When reinstalling the wheel ornament (vehicles with steel wheels)**



Align the cutout of the wheel ornament with the valve stem as shown the illustration.

Certification for the jack

CE

Manufacturer's Declaration of Conformity

Manufacturer:
Kawasaki Industrial Co., Ltd.
4618 Mukaijima Shimada, Shizuoka, Japan

The EU Directives covered by this Declaration

2006/42/EC Machinery Directive

The product covered by this declaration

JACK SUB-ASSY,PANTOGRAPH

model
0.8ton , 1.1ton , 1.35ton , 1.5ton

The basis on which conformity is being declared

The product identified above complies with the requirements of the Machinery Directive
Directive above by meeting following standards

JIS D 8103

The technical documentation required to demonstrate that the product meets the requirement the Machinery Directive has been compiled by the signatory belowand is available for inspection by the relevant enforcement authorities.

A sample of the product has been tested by the manufacturer

Technical File No: KSF-201-00-01

The CE mark was first applied in:2010

Done at Shizuoka, Japan

Signature:
Koji Kawasaki
PRESIDENT ,Kawasaki Industrial Co., Ltd.
Date of Issue: 25 December,2009

CAUTION

When using the spare tire

- Remember that the compact spare tire provided is specifically designed for use with your vehicle. Do not use your compact spare tire on another vehicle.
- Do not use more than one compact spare tire simultaneously.
- Replace the compact spare tire with a standard tire as soon as possible.
- Avoid sudden acceleration, deceleration and braking, as well as sharp cornering.

When storing the compact spare tire

Be careful not to catch fingers or other body parts between the compact spare tire and the body of the vehicle.

When the compact spare tire is attached

The vehicle speed may not be correctly detected, and the following systems may not operate correctly:

- ABS
- Brake assist
- VSC
- TRC

Speed limit when using the compact spare tire

Do not drive at speeds in excess of 80 km/h (50 mph) when a compact spare tire is installed on the vehicle.

The compact spare tire is not designed for driving at high speeds. Failure to observe this precaution may lead to an accident causing death or serious injury.

Using the tire jack

Improper use of the tire jack may cause the vehicle to suddenly fall off the jack, leading to death or serious injury.

- Do not use the tire jack for any purpose other than replacing tires or installing and removing tire chains.

CAUTION

- Only use the tire jack that comes with this vehicle for replacing a flat tire. Do not use it on other vehicles, and do not use other tire jacks for replacing tires on this vehicle.
- Always check that the tire jack is securely set to the jack point.
- Do not put any part of your body under the vehicle while it is supported by the jack.
- Do not start or run the engine while your vehicle is supported by the jack.
- Do not raise the vehicle while someone is inside.
- When raising the vehicle, do not put an object on or under the jack.
- Do not raise the vehicle to a height greater than that required to replace the tire.
- Use a jack stand if it is necessary to get under the vehicle.

Take particular care when lowering the vehicle to ensure that no one working on or near the vehicle may be injured.

Replacing a flat tire

Observe the following precautions to reduce the risk of death or serious injury:

- Do not attach a heavily damaged wheel ornament, as it may fly off the wheel while the vehicle is moving.
- Do not touch the disc wheels or the area around the brakes immediately after the vehicle has been driven.
  After the vehicle has been driven the disc wheels and the area around the brakes will be extremely hot. Touching these areas with hands, feet or other body parts while changing a tire, etc. may result in burns.
- Have the wheel nuts tightened with a torque wrench to 103 N•m (10.5 kgf•m, 76 ft•lbf) as soon as possible after changing wheels.
- When installing a tire, only use wheel nuts that have been specifically designed for that wheel.
- If there are any cracks or deformations in the bolt screws, nut threads or bolt holes of the wheel, have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

When installing the wheel nuts

Be sure to install the wheel nuts with the tapered end facing inward.
(→P. 398)

Failure to follow these precautions could cause the wheel nuts to loosen and the tire to fall off, resulting in death or serious injury.

NOTICE

Do not drive the vehicle with a flat tire.

Do not continue driving with a flat tire.
Driving even a short distance with a flat tire can damage the tire and the wheel beyond repair.

Be careful when driving over bumps with the compact spare tire installed on the vehicle.

The vehicle becomes lower when driving with the compact spare tire compared to when driving with standard tires. Be careful when driving over uneven road surfaces.

Driving with tire chains and the compact spare tire

Do not fit tire chains to the compact spare tire.
Tire chains may damage the vehicle body and adversely affect driving performance.

If you have a flat tire (vehicles with an emergency tire puncture repair kit)

A puncture caused by a nail or screw passing through the tire tread can be repaired temporarily using the emergency tire puncture repair kit. (The kit contains a bottle of sealant. The sealant can be used only once to temporarily repair one tire without removing the nail or screw from the tire.) Depending on the damage, this kit cannot be used to repair the tire. (→P. 472)

After temporarily repairing the tire with the kit, have the tire repaired or replaced by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional. Repairs conducted using the emergency tire puncture repair kit are only a temporary measure. Have the tire repaired and replaced as soon as possible.

Before repairing the tire

- Stop the vehicle in a safe place on a hard, flat surface.
- Set the parking brake.
- Shift the shift lever to P (vehicles with a Multidrive) or N (vehicles with a multi-mode manual transmission and manual transmission).
- Stop the engine.
- Turn on the emergency flashers.

Location of the emergency tire puncture repair kit

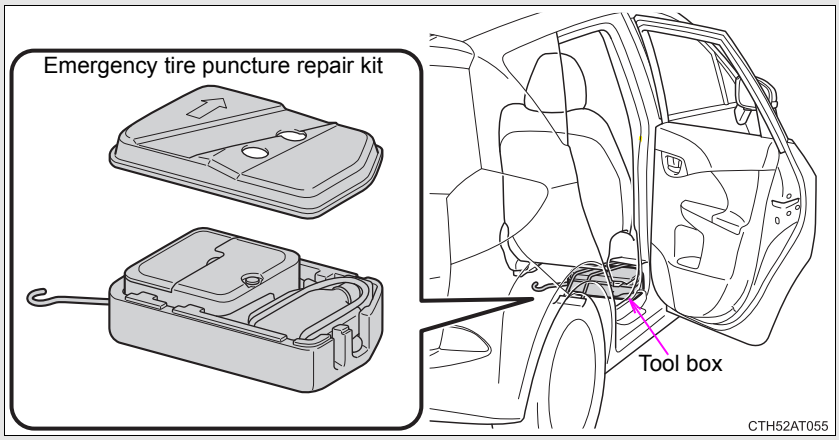

Emergency tire puncture repair kit components

Bottle

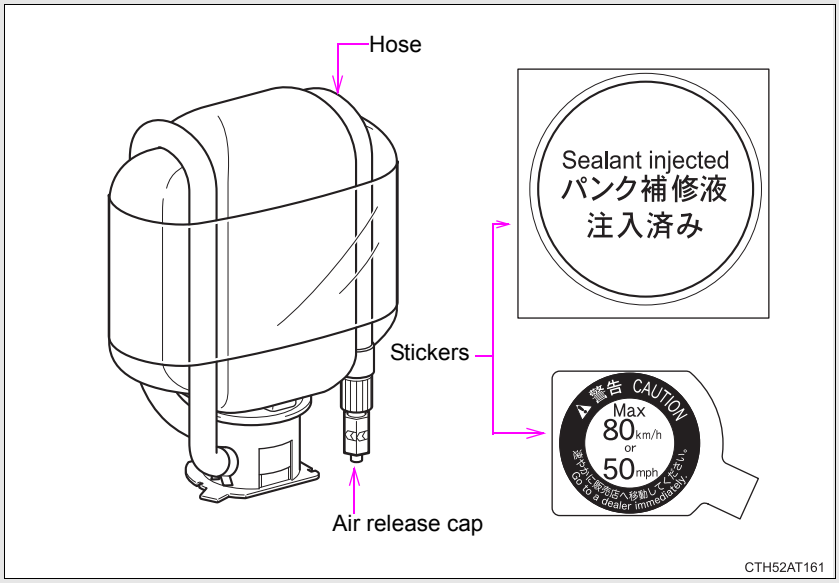

Compressor

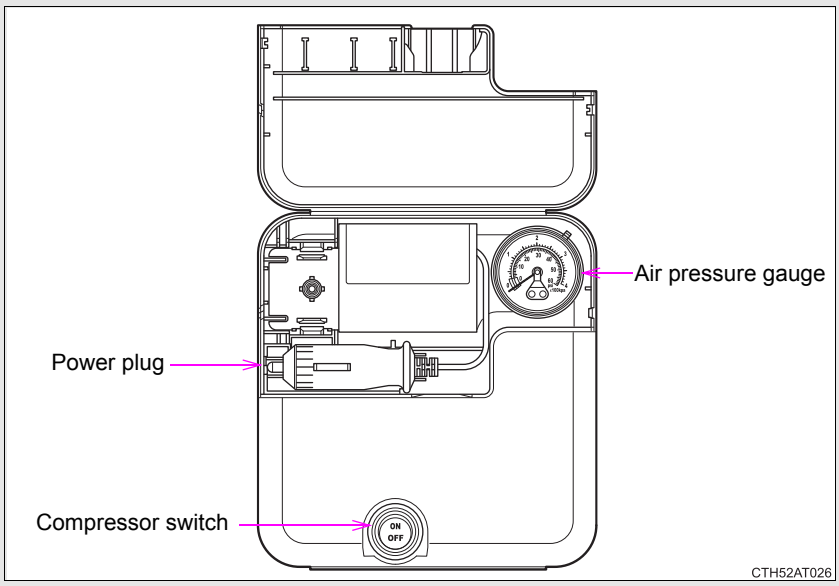
Air pressure gauge
Power plug
Compressor switch
ON
OFF
CTH52AT026

Before performing emergency repair

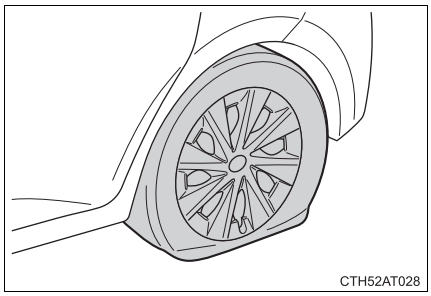

Check the degree of the tire damage.

- Do not remove the nail or screw from the tire. Removing the object may widen the opening and prevent emergency repair with the repair kit.
- To avoid sealant leakage, move the vehicle until the area of the puncture, if known, is positioned at the top of the tire.

■ **In the following cases, the tire cannot be repaired with the emergency tire puncture repair kit. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.**

- When the tire is damaged due to driving without sufficient air pressure
- When there are any cracks or damage at any location on the tire, such as on the side wall, except the tread
- When the tire is visibly separated from the wheel
- When the cut or damage to the tread is 4 mm (0.16 in.) long or more
- When the wheel is damaged
- When two or more tires have been punctured
- When 2 or more sharp objects such as nails or screws have passed through the tread on a single tire
- When the sealant has expired

Taking out the emergency tire puncture repair kit

STEP 1 Move the front right seat forward. (→P. 79)

STEP 2

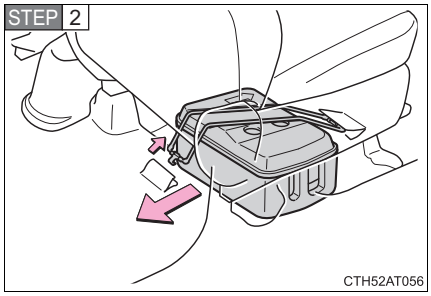

Unhook the hook and take out the tool box.

STEP 3

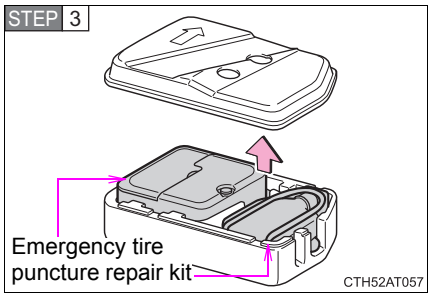

Take out the emergency tire puncture repair kit.

Emergency repair method

STEP 1 Take out the repair kit from the tool box.

STEP 2

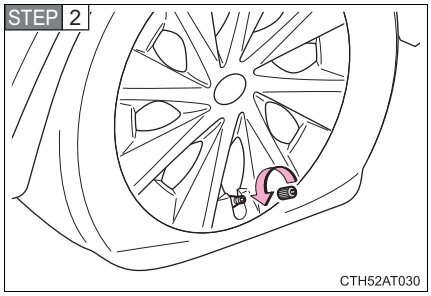

Remove the valve cap from the valve of the punctured tire.

STEP 3

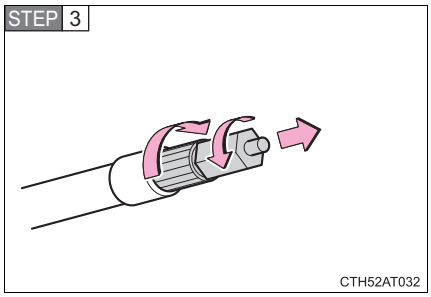

Remove the protective film from the bottle and extend the hose. Remove the air release cap from the hose.

Attach the sticker enclosed with the bottle on the specified locations. (See step 9.)

You will use the air release cap again. Therefore keep it in a safe place.

STEP 4

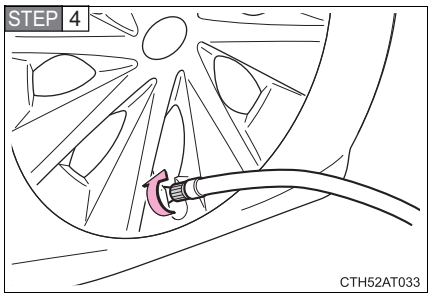

Connect the hose to the valve.

Screw the end of the hose clockwise as far as possible.

STEP 5

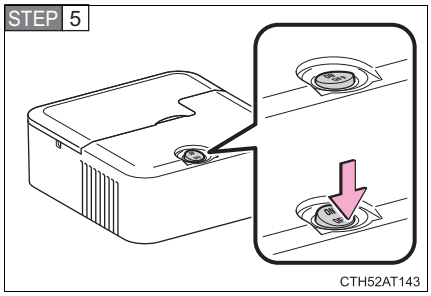

Make sure that the compressor switch is off.

STEP 6

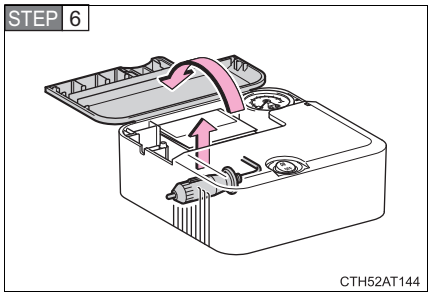

Remove the power plug from the compressor.

STEP 7 Connect the power plug to the power outlet socket. (→P. 343)

Front

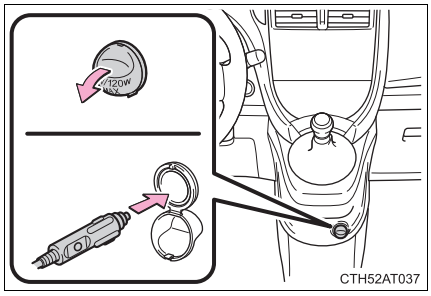

Rear

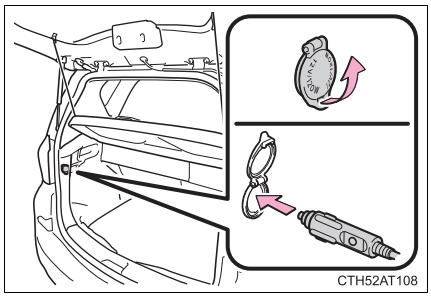

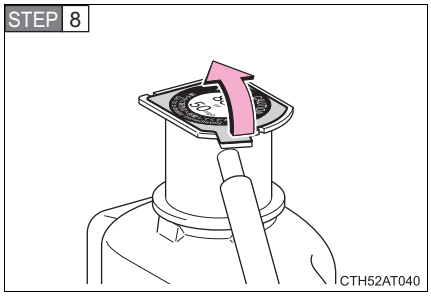

Remove the sticker.

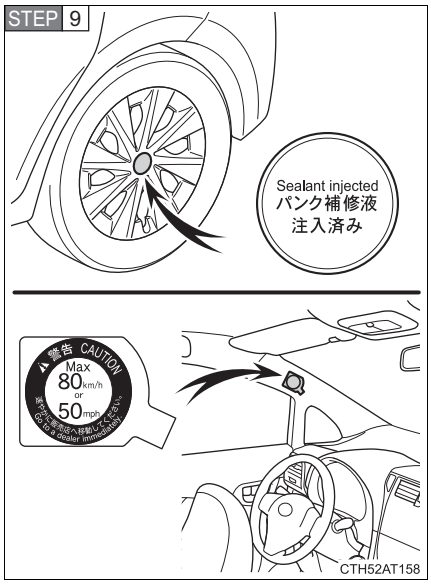

Attach the 2 stickers as shown.

Remove any dirt and moisture from the wheel before attaching the label. If it is impossible to attach the label, make sure to tell any authorized Toyota dealer or repairer, or other duly qualified and equipped professional when you have them repair and replace the tire that sealant is injected.

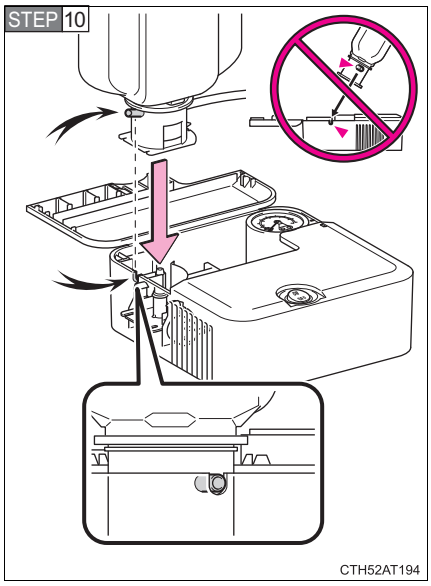

Connect the bottle to the compressor.

As shown in the illustration, insert the bottle vertically into the compressor to connect making sure that the claw on the bottle's neck is hooked onto the cutout of the compressor case.

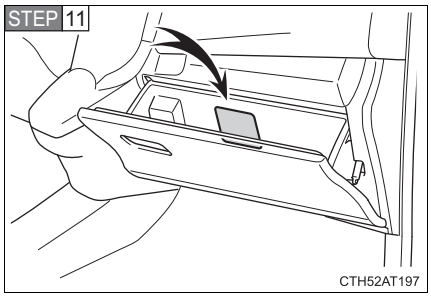

Check the specified tire inflation pressure.

Tire inflation pressure is specified on the label in the glove box. (→P. 531)

STEP 12 Start the vehicle's engine.

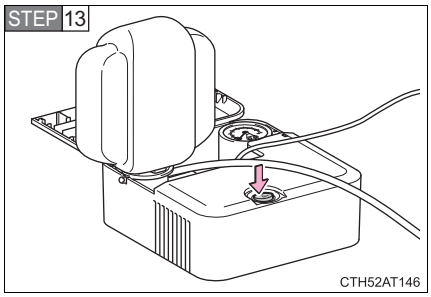

To inject the sealant and inflate the tire, turn the compressor switch on.

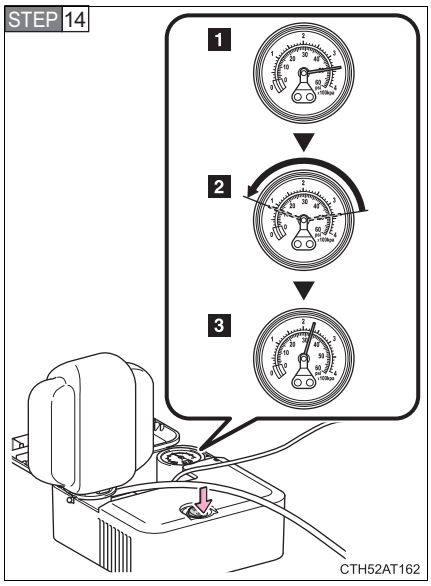

Inflate the tire until the specified air pressure is reached.

1 The sealant will be injected and the pressure will surge and then gradually decrease.

2 The air pressure gauge will display the actual tire inflation pressure about 1 minute (5 minutes at low temperature) after the switch is turned on.

3 Inflate the tire until the specified air pressure.

- Turn the compressor switch off and then check the tire inflation pressure. Being careful not to over inflate, check and repeat the inflation procedure until the specified tire inflation pressure is reached.
- If the tire inflation pressure is still lower than the specified point after inflation for 35 minutes with the switch on, the tire is too damaged to be repaired. Turn the compressor switch off and contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
- If the tire inflation pressure exceeds the specified air pressure, let out some air to adjust the tire inflation pressure. (→P. 481, 531)

STEP 15 With the compressor switch off, disconnect the hose from the valve on the tire and then pull out the power plug from the power outlet socket.

Some sealant may leak when the hose is removed.

STEP 16 Install the valve cap onto the valve of the emergency repaired tire.

STEP 17

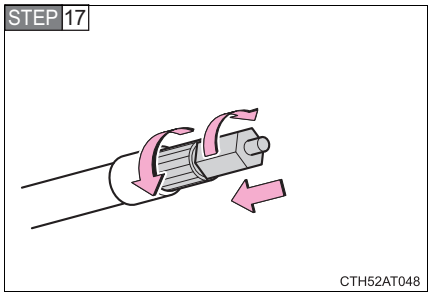

Attach the air release cap to the end of the hose.

If the air release cap is not attached, the sealant may leak and the vehicle may get dirty.

STEP 18 Temporarily store the bottle in the luggage compartment while it is connected to the compressor.

STEP 19 To spread the liquid sealant evenly within the tire, immediately drive safely for about 5 km (3 miles) below 80 km/h (50 mph).

STEP 20

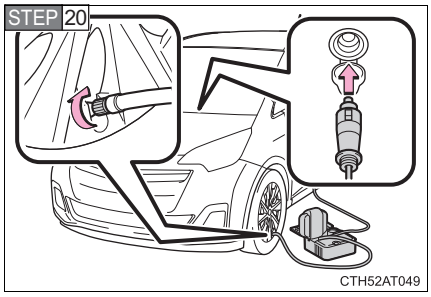

After driving for about 5 km (3 miles), stop your vehicle in a safe place on a hard, flat surface and remove the air release cap from the hose before reconnecting the repair kit.

STEP 21

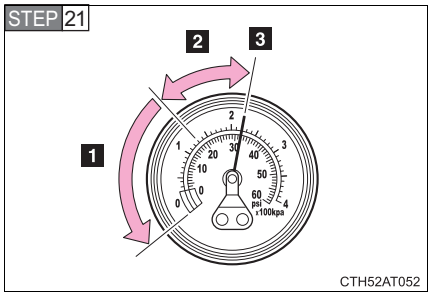

Turn the compressor switch on and wait for an approximately 5 seconds, and then turn it off. Check the tire inflation pressure.

1 If the tire inflation pressure is under 130 kPa (1.3 kgf/cm^2 or bar, 19 psi): The puncture cannot be repaired. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

2 If the tire inflation pressure is 130 kPa (1.3 kgf/cm^2 or bar, 19 psi) or higher, but less than the specified air pressure: Proceed to STEP 22.

3 If the tire inflation pressure is the specified air pressure (→P. 531): Proceed to STEP 23.

STEP 22 Turn the compressor switch on to inflate the tire until the specified air pressure is reached. Drive for about 5 km (3 miles) and then perform STEP 20.

STEP 23

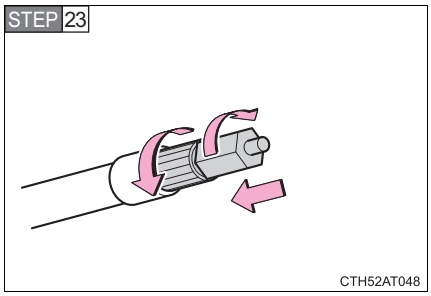

Attach the air release cap to the end of the hose.

If the air release cap is not attached, the sealant may leak and the vehicle may get dirty.

STEP 24 Store the bottle in the luggage compartment while it is connected to the compressor.

STEP 25 Taking precautions to avoid sudden braking, sudden acceleration and sharp turns, drive carefully at under 80 km/h (50 mph) to the nearest authorized Toyota dealer or repairer, or another duly qualified and equipped professional for tire repair or replacement.

■ **If the tire is inflated to more than the specified air pressure**

STEP 1 Disconnect the hose from the valve.

STEP 2



Install the air release cap to the end of the hose and push the protrusion on the air release cap into the tire valve to let some air out.

STEP 3 Disconnect the hose from the valve, remove the air release cap from the hose and then reconnect the hose.

STEP 4 Turn the compressor switch on and wait for several seconds, and then turn it off. Check that the air pressure indicator shows the specified air pressure.

If the air pressure is under the designated pressure, turn the compressor switch on again and repeat the inflation procedure until the specified air pressure is reached.

■ **The valve of a tire that has been repaired**

After a tire is repaired with the emergency tire puncture repair kit, the valve should be replaced.

■ **Note for checking the emergency tire puncture repair kit**

Check the sealant expiry date occasionally.
The expiry date is shown on the bottle. Do not use sealant whose expiry date has already passed. Otherwise, repairs conducted using the emergency tire puncture repair kit may not be performed properly.

Emergency tire puncture repair kit

- The sealant stored in the emergency tire puncture repair kit can be used only once to temporarily repair a single tire. If the sealant has been used and needs to be replaced, purchase a new bottle at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional. The compressor is reusable.
- The sealant can be used when the outside temperature is from -30°C (-22°F) to 60°C (140°F).
- The repair kit is exclusively designed for size and type of tires originally installed on your vehicle. Do not use it for tires that a different size than the original ones, or for any other purposes.
- The sealant has a limited lifespan. The expiry date is marked on the bottle. The bottle of sealant should be replaced with a new bottle before the expiry date. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for replacement.
- If the sealant gets on your clothes, it may stain.
- If the sealant adheres to a wheel or the surface of the vehicle body, the stain may not be removable if it is not cleaned at once. Immediately wipe away the sealant with a wet cloth.
- During operation of the repair kit, a loud operation noise is produced. This does not indicate a malfunction.
- Do not use to check or to adjust the tire pressure.

CAUTION

■ **Do not drive the vehicle with a flat tire**

Do not continue driving with a flat tire.
Driving even a short distance with a flat tire can damage the tire and the wheel beyond repair.

Driving with a flat tire may cause a circumferential groove on the side wall. In such a case, the tire may explode when using a repair kit.

■ **Caution while driving**

- Store the repair kit under the front right seat.
  Injuries may result in the event of an accident or sudden braking.
- The repair kit is exclusively only for your vehicle.
  Do not use repair kit on other vehicles, which could lead to an accident causing death or serious injury.
- Do not use repair kit for tires that are different size than the original ones, or for any other purpose. If the tires have not been completely repaired, it could lead to an accident causing death or serious injury.

■ **Precautions for use of the sealant**

- Ingesting the sealant is hazardous to your health. If you ingest sealant, consume as much water as possible, and then immediately consult a doctor.
- If sealant gets in eyes or adheres to skin, immediately wash it off with water. If discomfort persists, consult a doctor.

■ **When fixing the flat tire**

- Stop your vehicle in a safe and flat area.
- Do not touch the wheels or the area around the brakes immediately after the vehicle has been driven.
  After the vehicle has been driven, the wheels and the area around the brakes may be extremely hot. Touching these areas with hands, feet or other body parts may result in burns.
- Connect the valve and hose securely with the tire installed on the vehicle. If the hose is not properly connected to the valve, air leakage may occur as sealant may be sprayed out.
- If the hose comes off the valve while inflating the tire, there is a risk that the hose will move abruptly due to air pressure.

CAUTION

When fixing the flat tire

- After inflation of the tire has completed, the sealant may splatter when the hose is disconnected or some air is let out of the tire.
- Follow the operation procedure to repair the tire. If the procedures not followed, the sealant may spray out.
- Keep back from the tire while it is being repaired, as there is a chance of it bursting while the repair operation is being performed. If you notice any cracks or deformation of the tire, turn off the compressor switch and stop the repair operation immediately.
- The repair kit may overheat if operated for a long period of time. Do not operate the repair kit continuously for more than 40 minutes.
- Parts of the repair kit become hot during operation. Be careful when handling the repair kit during and after operation. Do not touch the metal part around the connecting area between the bottle and compressor. It will be extremely hot.
- Do not attach the vehicle speed warning sticker to an area other than the one indicated. If the sticker is attached to an area where an SRS airbag is located, such as the pad of the steering wheel, it may prevent the SRS airbag from operating properly.

Driving to spread the liquid sealant evenly

Observe the following precautions to reduce the risk of accidents.
Failing to do so may result in a loss of vehicle control and cause death or serious injury.

- Drive the vehicle carefully at a low speed. Be especially careful when turning and cornering.
- If the vehicle does not drive straight or you feel a pull through the steering wheel, stop the vehicle and check the following.
  - Tire condition. The tire may have separated from the wheel.
  - Tire inflation pressure. If the tire inflation pressure is 130 kPa (1.3 kgf/cm^2 or bar, 19 psi) or less, the tire may be severely damaged.

NOTICE

When performing an emergency repair

- A tire should only be repaired with the emergency tire puncture repair kit if the damage is caused by a sharp object such as nail or screw passing through the tire tread.
  Do not remove the sharp object from the tire. Removing the object may widen the opening and disenable emergency repair with the repair kit.
- The repair kit is not waterproof. Make sure that the repair kit is not exposed to water, such as when it is being used in the rain.
- Do not put the repair kit directly onto dusty ground such as sand at the side of the road. If the repair kit vacuums up dust etc., a malfunction may occur.

Precautions for the emergency tire puncture repair kit

- The repair kit power source should be 12 V DC suitable for vehicle use. Do not connect the repair kit to any other source.
- If gasoline splatters on the repair kit, the repair kit may deteriorate. Take care not to allow gasoline to contact it.
- Place the repair kit in a storage to prevent it from being exposed to dirt or water.
- Store the repair kit under the front right seat out of reach of children.
- Do not disassemble or modify the repair kit. Do not subject parts such as the air pressure indicator to impacts. This may cause a malfunction.

If the engine will not start

If the engine will not start even though correct starting procedures are being followed (→P. 176, 186), consider each of the following points:

■ **The engine will not start even though the starter motor operates normally.**

One of the following may be the cause of the problem:

- There may not be sufficient fuel in the vehicle's tank.
  Gasoline engine: Refuel the vehicle.
  Diesel engine: (→P. 510)
- The engine may be flooded. (gasoline engine)
  Try to restart the engine again following correct starting procedures. (→P. 176, 186)
- There may be a malfunction in the engine immobilizer system. (→P. 107)

■ **The starter motor turns over slowly, the interior lights and headlights are dim, or the horn does not sound or sounds at a low volume.**

One of the following may be the cause of the problem:

- The battery may be discharged. (→P. 497)
- The battery terminal connections may be loose or corroded.

■ **The starter motor does not turn over. (vehicles with a smart entry & start system)**

The engine starting system may be malfunctioning due to an electrical problem such as an open circuit or a blown fuse. However, an interim measure is available to start the engine. (→P. 487)

■ **The starter motor does not turn over, the interior lights and headlights do not turn on, or the horn does not sound.**

One of the following may be the cause of the problem:

- One or both of the battery terminals may be disconnected.
- The battery may be discharged. (→P. 497)
- There may be a malfunction in the steering lock system (vehicles with a smart entry & start system).

  Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional if the problem cannot be repaired, or if repair procedures are unknown.

Emergency start function (vehicles with a smart entry & start system)

When the engine does not start, the following steps can be used as an interim measure to start the engine if the “ENGINE START STOP” switch is functioning normally:

Vehicles with a Multidrive

STEP 1 Set the parking brake.

STEP 2 Shift the shift lever to P.

STEP 3 Turn the “ENGINE START STOP” switch to ACCESSORY mode.

STEP 4 Push and hold the “ENGINE START STOP” switch for about 15 seconds while depressing the brake pedal firmly.

Even if the engine can be started using the above steps, the system may be malfunctioning. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Vehicles with a multi-mode manual transmission

STEP 1 Set the parking brake.

STEP 2 Put the shift lever in N.

STEP 3 Turn the “ENGINE START STOP” switch to ACCESSORY mode.

STEP 4 Push and hold the “ENGINE START STOP” switch for about 15 seconds while depressing the brake pedal firmly.

Even if the engine can be started using the above steps, the system may be malfunctioning. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Vehicles with a manual transmission

STEP 1 Set the parking brake.

STEP 2 Put the shift lever in N.

STEP 3 Turn the “ENGINE START STOP” switch to ACCESSORY mode.

STEP 4 Push and hold the “ENGINE START STOP” switch for about 15 seconds while depressing the brake pedal and clutch pedal firmly.

Even if the engine can be started using the above steps, the system may be malfunctioning. Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

If the shift lever cannot be shifted from P (vehicles with a Multidrive)

If the shift lever cannot be shifted with your foot on the brake pedal, there may be a problem with the shift lock system (a system to prevent accidental operation of the shift lever). Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.

The following steps may be used as an emergency measure to ensure that the shift lever can be shifted:

STEP 1 Set the parking brake.

STEP 2 Vehicles without a smart entry & start system: Turn the engine switch to the “ACC” position.

Vehicles with a smart entry & start system: Turn the “ENGINE START STOP” switch to ACCESSORY mode.

STEP 3 Depress the brake pedal.

STEP 4

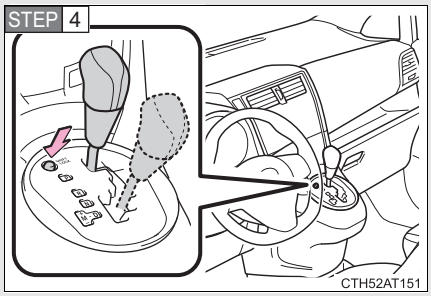

Press the shift lock override button.

The shift lever can be shifted while the button is pressed.

If the shift lever cannot be shifted (vehicles with a multi-mode manual transmission)

If the shift lever cannot be shifted with your foot on the brake pedal, there may be a problem with the shift lock system (a system to prevent accidental operation of the shift lever). Have the vehicle inspected by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional immediately.

The following steps may be used as an emergency measure to ensure that the shift lever can be shifted:

STEP 1 Set the parking brake.

STEP 2 Vehicles without a smart entry & start system: Turn the engine switch to the “ACC” position.

Vehicles with a smart entry & start system: Turn the “ENGINE START STOP” switch to ACCESSORY mode.

STEP 3 Depress the brake pedal.

STEP 4

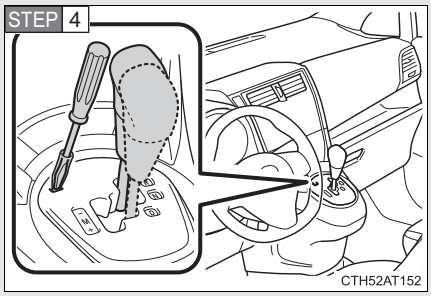

Press the shift lock override button with a flathead screwdriver or equivalent.

The shift lever can be shifted while the button is pressed.

If you lose your keys

New genuine Toyota keys can be made by any authorized Toyota dealer or repairer, and another duly qualified and equipped professional using the other key and the key number stamped on your key number plate.

If communication between the electronic key and vehicle is interrupted (→P. 41) or the electronic key cannot be used because the battery is depleted, the smart entry & start system and wireless remote control cannot be used. In such cases, the doors can be opened and the engine can be started by following the procedure below.

Unlocking and locking the doors

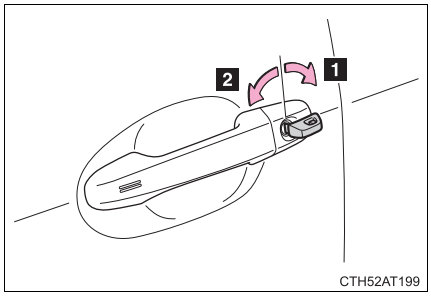

Use the mechanical key (→P. 31) in order to perform the following operations:

1 Unlocks all the doors

2 Locks all the doors

Starting the engine

Vehicles with a Multidrive

STEP 1 Ensure that the shift lever is in P and firmly depress the brake pedal.

STEP 2

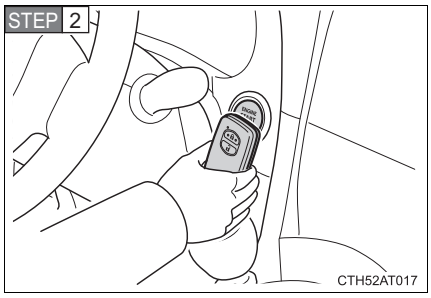

Touch the Toyota emblem side of the electronic key to the “ENGINE START STOP” switch.

The “ENGINE START STOP” switch will turn to IGNITION ON mode.

When the smart entry & start system is deactivated in customization setting, the “ENGINE START STOP” switch will turn to ACCESSORY mode. Modes can be changed by pressing the “ENGINE START STOP” switch with the brake pedal released. (The mode changes each time the switch is pressed.)

STEP 3 Firmly depress the brake pedal and check that the smart entry & start system indicator light (green) turns on.

STEP 4 Press the “ENGINE START STOP” switch.

In the event that the “ENGINE START STOP” switch still cannot be operated, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Vehicles with a multi-mode manual transmission

STEP 1 Ensure that the shift lever is in N and firmly depress the brake pedal.

STEP 2

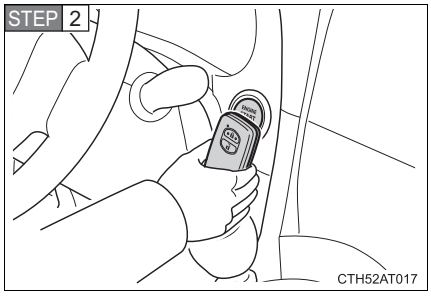

Touch the Toyota emblem side of the electronic key to the “ENGINE START STOP” switch.

The “ENGINE START STOP” switch will turn to IGNITION ON mode.

When the smart entry & start system is deactivated in customization setting, the “ENGINE START STOP” switch will turn to ACCESSORY mode. Modes can be changed by pressing the “ENGINE START STOP” switch with the brake pedal released. (The mode changes each time the switch is pressed.)

STEP 3 Firmly depress the brake pedal and check that the smart entry & start system indicator light (green) turns on.

STEP 4 Press the “ENGINE START STOP” switch.

In the event that the “ENGINE START STOP” switch still cannot be operated, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Vehicles with a manual transmission

STEP 1 Ensure that the shift lever is in N and depress the clutch pedal.

STEP 2

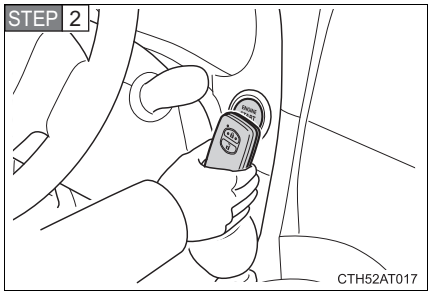

Touch the Toyota emblem side of the electronic key to the “ENGINE START STOP” switch.

The “ENGINE START STOP” switch will turn to IGNITION ON mode.

When the smart entry & start system is deactivated in customization setting, the “ENGINE START STOP” switch will turn to ACCESSORY mode. Modes can be changed by pressing the “ENGINE START STOP” switch with the clutch pedal released. (The mode changes each time the switch is pressed.)

STEP 3 Firmly depress the clutch pedal and check that the smart entry & start system indicator light (green) turns on.

STEP 4 Press the “ENGINE START STOP” switch.

In the event that the “ENGINE START STOP” switch still cannot be operated, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

■ **Stopping the engine**

Vehicles with a Multidrive: Shift the shift lever to P and press the “ENGINE START STOP” switch as you normally do when stopping the engine.

Except vehicles with a Multidrive: Shift the shift lever to N and press the “ENGINE START STOP” switch as you normally do when stopping the engine.

■ **Replacing the key battery**

As the above procedure is a temporary measure, it is recommended that the electronic key battery be replaced immediately when the battery is depleted. (→P. 402)

■ **Alarm (if equipped)**

Using the mechanical key to lock the doors will not set the alarm system.
If a door is unlocked using the mechanical key when the alarm system is set, the alarm may be triggered. (→P. 119)

■ **If the doors cannot be locked or unlocked by the smart entry & start system**

Lock and unlock the doors by the mechanical key or wireless remote control.

■ **When the electronic key does not work properly**

Make sure that the smart entry & start system has not been deactivated in the customization setting. If it is off, turn the function on.
(Customizable features →P. 536)

■ **Changing “ENGINE START STOP” switch modes (if the smart entry & start system has been deactivated in a customized setting)**

Release the brake pedal (except for manual transmission) or clutch pedal (for manual transmission) and press the “ENGINE START STOP” switch in STEP 3 above.
The engine does not start and modes will be changed each time the switch is pressed. (→P. 180)

If the battery is discharged

The following procedures may be used to start the engine if the vehicle's battery is discharged.
You can also call any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

If you have a set of jumper (or booster) cables and a second vehicle with a 12-volt battery, you can jump start your vehicle by following the steps below.

STEP 1 Open the hood. (→P. 375)

STEP 2 Pull the rubber strip on the edge to unhook it from the cover, and then push the tabs in and lift the cover off.

Left-hand drive vehicles

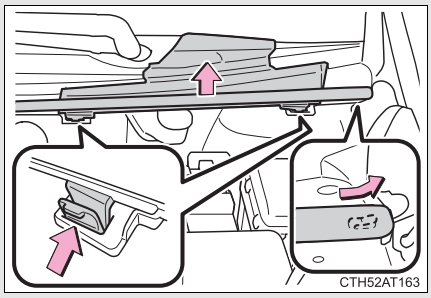

Right-hand drive vehicles

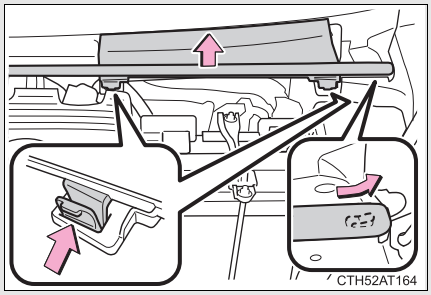

STEP 3 Vehicles with diesel engine: Remove the engine cover.

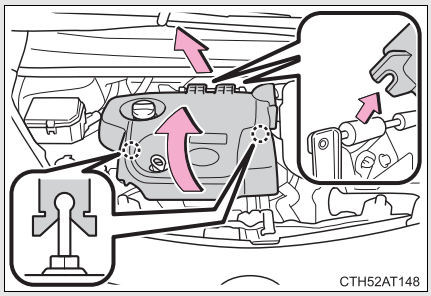

Raise the front of the engine cover to detach it from the clips and then pull the cover to detach it from the brackets on the rear bar as shown in the illustration.

Gasoline engine

STEP 4

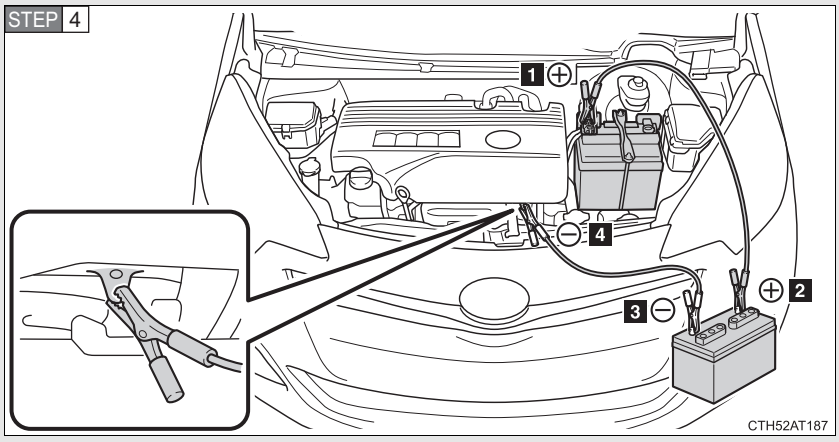

Connect the jumper cables according to the following procedure:

1 Positive (+) battery terminal on your vehicle
2 Positive (+) battery terminal on the second vehicle
3 Negative (-) battery terminal on the second vehicle
4 Connect the jumper cable to ground on your vehicle as shown in the illustration.

Diesel engine

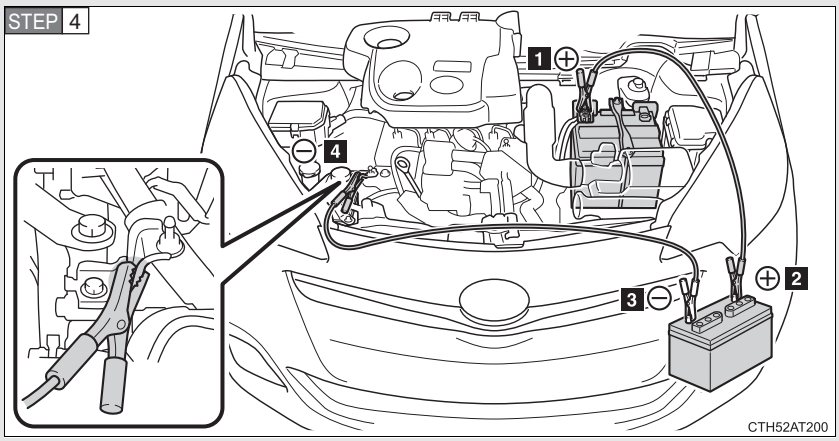

Connect the jumper cables according to the following procedure:

1 Positive (+) battery terminal on your vehicle

2 Positive (+) battery terminal on the second vehicle

3 Negative (-) battery terminal on the second vehicle

4 Connect the jumper cable to ground on your vehicle as shown in the illustration.

STEP 5 Start the engine of the second vehicle. Increase the engine speed slightly and maintain at that level for approximately 5 minutes to recharge the battery of your vehicle.

STEP 6 Vehicles with a smart entry & start system: Open and close any of the doors with the “ENGINE START STOP” switch off.

STEP 7 Vehicles without a smart entry & start system: Maintain the engine speed of the second vehicle and turn the engine switch to the “ON” position, then start the vehicle's engine.

Vehicles with a smart entry & start system: Maintain the engine speed of the second vehicle and turn the “ENGINE START STOP” switch to IGNITION ON mode, then start the vehicle's engine.

STEP 8 Once the vehicle’s engine has started, remove the jumper cables in the exact reverse order in which they were connected.

STEP 9 Reinstall the cover, and then hook the rubber strip's groove onto the cover.

Left-hand drive vehicles

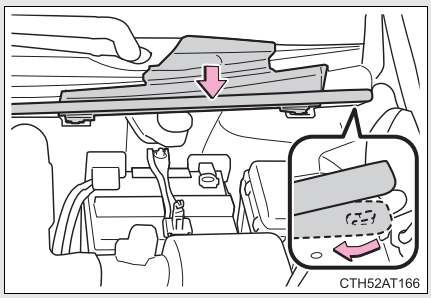

Right-hand drive vehicles

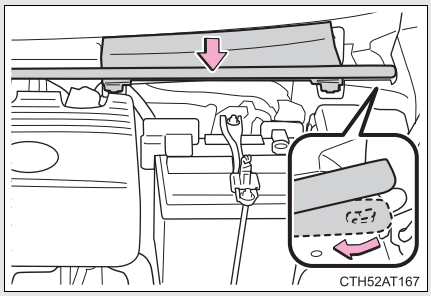

Once the engine starts, have the vehicle checked at any authorized Toyota dealer or repairer, or another duly qualified and equipped professional, as soon as possible.

■ **Starting the engine when the battery is discharged (vehicles with a Multidrive)**

The engine cannot be started by push-starting.

■ **To prevent battery discharge**

- Turn off the headlights and the audio system while the engine is off.
- Turn off any unnecessary electrical components when the vehicle is running at a low speed for an extended period, such as in heavy traffic.

■ **Charging the battery**

The electricity stored in the battery will discharge gradually even when the vehicle is not in use, due to natural discharge and the draining effects of certain electrical appliances. If the vehicle is left for a long time, the battery may discharge, and the engine may be unable to start. (The battery recharges automatically during driving.)

Precautions when the battery is discharged (vehicles with a smart entry & start system)

- In some cases, it may not be possible to unlock the doors using the smart entry & start system when the battery is discharged. Use the wireless remote control or the mechanical key to lock or unlock the doors.
- The engine may not start on the first attempt after the battery has recharged but will start normally after the second attempt. This is not a malfunction.
- The “ENGINE START STOP” switch mode is memorized by the vehicle. When the battery is reconnected, the system will return to the mode it was in before the battery was discharged. Before disconnecting the battery, turn the “ENGINE START STOP” switch off.
  If you are unsure what mode the “ENGINE START STOP” switch was in before the battery discharged, be especially careful when reconnecting the battery.

When the battery is removed or discharged (vehicle with an alarm)

Make sure that the key is not inside the vehicle when recharging or replacing the battery. The key may be locked in the vehicle if the alarm is activated. (→P. 120)

CAUTION

■ **Avoiding battery fires or explosions**

Observe the following precautions to prevent accidentally igniting the flammable gas that may be emitted from the battery:

- Make sure each jumper cable is connected to the correct terminal and that it is not unintentionally in contact with any other than the intended terminal.
- Do not allow the + and - clamps of the jumper cables to come into contact with each other.
- Do not smoke, use matches, cigarette lighters or allow open flame near the battery.

■ **Battery precautions**

The battery contains poisonous and corrosive acidic electrolyte, while related parts contain lead and lead compounds. Observe the following precautions when handling the battery:

- When working with the battery, always wear safety glasses and take care not to allow any battery fluids (acid) to come into contact with skin, clothing or the vehicle body.
- Do not lean over the battery.
- In the event that battery fluid comes into contact with the skin or eyes, immediately wash the affected area with water and seek medical attention. Place a wet sponge or cloth over the affected area until medical attention can be received.
- Always wash your hands after handling the battery support, terminals, and other battery-related parts.
- Do not allow children near the battery.

■ **To prevent damage to the vehicle**

Do not pull- or push-start the vehicle as the three-way catalytic converter (gasoline-powered vehicles) or catalytic converter (diesel-powered vehicles) may overheat and become a fire hazard.

NOTICE

When handling jumper cables

When connecting the jumper cables, ensure that they do not become entangled in the cooling fans or belt.

If your vehicle overheats

The following may indicate that your vehicle is overheating.

- The high engine coolant temperature warning light (→P. 444) comes on or flashes, or a loss of engine power is experienced. (For example, the vehicle speed does not increase.)
- Steam comes out from under the hood.

Correction procedures

STEP 1 Stop the vehicle in a safe place and turn off the air conditioning system, and then stop the engine.

STEP 2 If you see steam:
Carefully lift the hood after the steam subsides.

If you do not see steam:
Carefully lift the hood.

Gasoline engine

STEP 3

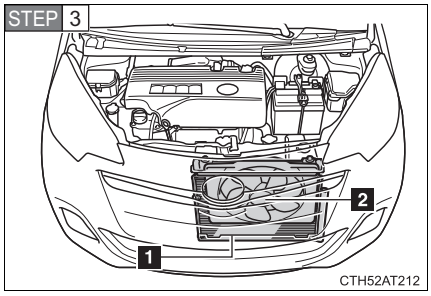

After the engine has cooled down sufficiently, inspect the hoses and radiator core (radiator) for any leaks.

1 Radiator

2 Cooling fan

If a large amount of coolant leaks, immediately contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Diesel engine

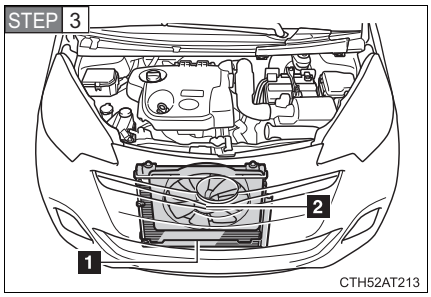

After the engine has cooled down sufficiently, inspect the hoses and radiator core (radiator) for any leaks.

1 Radiator

2 Cooling fan

If a large amount of coolant leaks, immediately contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Gasoline engine

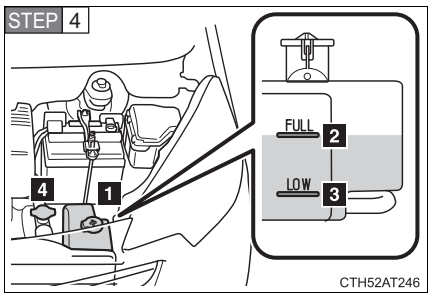

The coolant level is satisfactory if it is between the “FULL” and “LOW” lines on the reservoir.

1 Reservoir

2 “FULL”

3 “LOW”

4 Radiator cap

Diesel engine

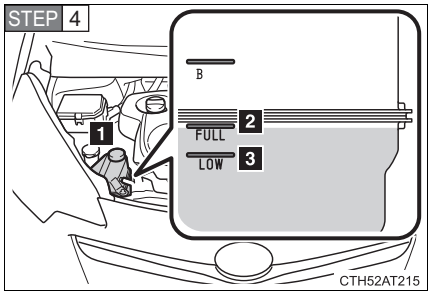

The coolant level is satisfactory if it is between the “FULL” and “LOW” lines on the reservoir.

1 Reservoir

2 “FULL”

3 “LOW”

Gasoline engine

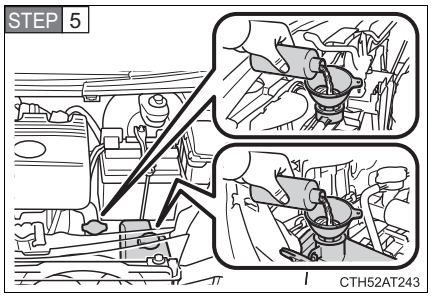

Add coolant if necessary.

Water can be used in an emergency if coolant is unavailable.

Diesel engine

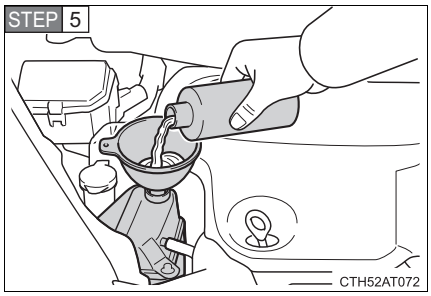

Add coolant if necessary.

Water can be used in an emergency if coolant is unavailable.

STEP 6 Start the engine and turn the air conditioning system on to check that the radiator cooling fan operates and to check for coolant leaks from the radiator or hoses.

The fan operates when the air conditioning system is turned on immediately after a cold start. Confirm that the fan is operating by checking the fan sound and air flow. If it is difficult to check these, turn the air conditioning system on and off repeatedly.
(The fan may not operate in freezing temperatures.)

STEP 7 If the fan is not operating:

Stop the engine immediately and contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

If the fan is operating:

Have the vehicle inspected at the nearest authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

CAUTION

■ **To prevent an accident or injury when inspecting under the hood of your vehicle**

- If steam is seen coming from under the hood, do not open the hood until the steam has subsided. The engine compartment may be very hot, causing serious injuries such as burns.
- Keep hands and clothing (especially a tie, a scarf or a muffler) away from the fans and belts. Failure to do so may cause the hands or clothing to be caught, resulting in serious injury.

Gasoline engine



- Do not loosen the radiator cap and the coolant reservoir cap while the engine and radiator are hot.
  Serious injury, such as burns, may result from hot coolant and steam released under pressure.

CAUTION

Diesel engine



- Do not loosen the coolant reservoir cap while the engine and radiator are hot. Serious injury, such as burns, may result from hot coolant and steam released under pressure.

NOTICE

When adding engine coolant

Wait until the engine has cooled down before adding engine coolant.
When adding coolant, do so slowly. Adding cool coolant to a hot engine too quickly can cause damage to the engine.

To prevent damage to the cooling system

Observe the following precautions:

- Avoid contaminating the coolant with foreign matter (such as sand or dust etc.).
- Do not use any coolant additive.

If you run out of fuel and the engine stalls (diesel engine only)

If you run out of fuel and the engine stalls:

STEP 1 Refuel your vehicle.

STEP 2

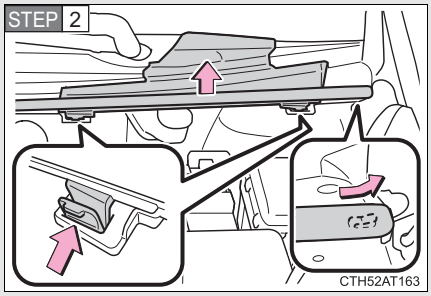

Pull the rubber strip on the edge to unhook it from the cover, and then push the tabs in and lift the cover off.

STEP 3

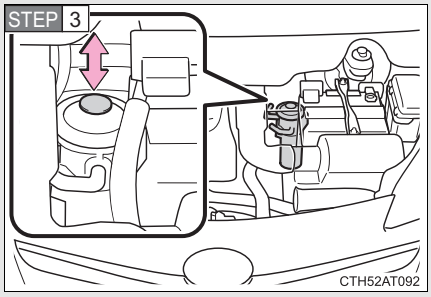

To bleed the fuel system, operate the priming pump until you feel more resistance.

STEP 4

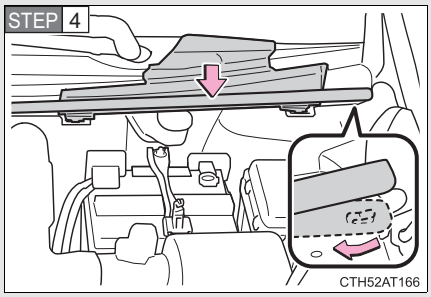

Reinstall the cover, and then hook the rubber strip's groove onto the cover.

STEP 5 Start the engine. (→P. 176, 186)

If the engine does not start after the above steps have been performed, wait for 10 seconds and then try steps 2 and 3 again. If the engine still does not start, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

After starting the engine, depress the accelerator pedal lightly until the engine runs smoothly.

NOTICE

When restarting the engine

- Do not crank the engine before refueling and operating the priming pump. This may damage the engine and fuel system.
- Vehicles without a smart entry & start system: Do not crank for more than 30 seconds at a time. This may overheat the starter and wiring system.

If the vehicle becomes stuck

Carry out the following procedures if the tires spin or the vehicle becomes stuck in mud, dirt or snow:

STEP 1 Vehicles with a Multidrive: Stop the engine. Set the parking brake and shift the shift lever in P.

Except vehicles with a Multidrive: Stop the engine. Set the parking brake and shift the shift lever in N.

STEP 2 Remove the mud, snow or sand from around the stuck tire.

STEP 3 Place wood, stones or some other material under the tires to help provide traction.

STEP 4 Restart the engine.

STEP 5 Vehicles with a Multidrive: Shift the shift lever to the D or R and carefully apply the accelerator to free the vehicle.

Vehicles with a multi-mode manual transmission: Shift the shift lever to the E, M or R and carefully apply the accelerator to free the vehicle.

Vehicles with a manual transmission: Shift the shift lever to 1 or R and carefully apply the accelerator to free the vehicle.

Turn off TRC and VSC if these functions are hampering your attempts to free the vehicle. (→P. 250)

CAUTION

■ **When attempting to free a stuck vehicle**

If you choose to push the vehicle back and forth to free it, make sure the surrounding area is clear to avoid striking other vehicles, objects or people. The vehicle may also lunge forward or lunge back suddenly as it becomes free. Use extreme caution.

■ **When shifting the shift lever (except vehicles with a manual transmission)**

Be careful not to shift the shift lever with the accelerator pedal depressed. This may lead to unexpected rapid acceleration of the vehicle that may cause an accident resulting in death or serious injury.

NOTICE

■ **To avoid damage to the transmission and other components**

- Avoid spinning the wheels and depressing the accelerator pedal more than necessary.
- If the vehicle remains stuck even after these procedures are performed, the vehicle may require towing to be freed.

If your vehicle has to be stopped in an emergency

Only in an emergency, such as if it becomes impossible to stop the vehicle in the normal way, stop the vehicle using the following procedure:

STEP 1 Steadily step on the brake pedal with both feet and firmly depress it.

Do not pump the brake pedal repeatedly as this will increase the effort required to slow the vehicle.

STEP 2 Shift the shift lever to N.

If the shift lever is shifted to N

STEP 3 After slowing down, stop the vehicle in a safe place by the road.

STEP 4 Stop the engine.

If the shift lever cannot be shifted to N

STEP 3 Keep depressing the brake pedal with both feet to reduce vehicle speed as much as possible.

STEP 4

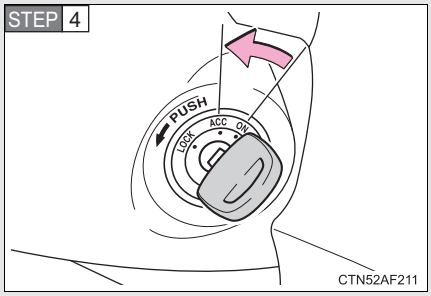

Vehicles without a smart entry & start system: Stop the engine by turning the engine switch to the “ACC” position.

STEP 4



Press and hold for 3 seconds or more, or press briefly 3 times or more

CTY52AD212

Vehicles with a smart entry & start system: To stop the engine, press and hold the “ENGINE START STOP” switch for 3 consecutive seconds or more, or press it briefly 3 times or more in succession.

STEP 5 Stop the vehicle in a safe place by the road.

CAUTION

■ If the engine has to be turned off while driving

- Power assist for the brakes and steering wheel will be lost, making the brake pedal harder to depress and the steering wheel heavier to turn. Decelerate as much as possible before turning off the engine.
- Vehicles without a smart entry & start system: Never attempt to remove the key, as doing so will lock the steering wheel.

Vehicle specifications 6

6-1. Specifications
Maintenance data (fuel, oil level, etc.)..... 518
Fuel information..... 533

6-2. Customization
Customizable features..... 536

Maintenance data (fuel, oil level, etc.)

Dimensions and weights

Overall length		3990 mm (157.1 in.)
Overall width		1695 mm (66.7 in.)
Overall height*1		1595 mm (62.8 in.)
Wheelbase		2550 mm (100.4 in.)
Tread	Front	1470 mm (57.9 in.)
	Rear	1460 mm (57.5 in.)
Gross vehicle mass	1NR-FE engine	Left-hand drive vehicles Manual transmission 1505 kg (3318 lb.)*2,4 1535 kg (3384 lb.)*2,5 1515 kg (3340 lb.)*3,4 1545 kg (3406 lb.)*3,5 Multidrive 1540 kg (3395 lb.)*2 1550 kg (3417 lb.)*3 Right-hand drive vehicles Manual transmission 1515 kg (3340 lb.)*4 1545 kg (3406 lb.)*5 Multidrive 1550 kg (3417 lb.)
	1ND-TV engine	Manual transmission 1575 kg (3472 lb.)*4 1600 kg (3527 lb.)*5 Multi-mode manual transmission 1605 kg (3538 lb.)

Maximum permissible axle capacity	Front	900 kg (1985 lb.)
	Rear	825 kg (1819 lb.)
Drawbar load		50 kg (110 lb.)
Towing capacity	with brake	800 kg (1764 lb.)
	without brake	550 kg (1213 lb.)

*1: Unladen vehicles

*2: Vehicles without Stop & Start system

*3: Vehicles with Stop & Start system

*4: Except vehicles with leather wrapped steering wheel

*5: Vehicles with leather wrapped steering wheel

Vehicle identification

Vehicle identification number

The vehicle identification number (VIN) is the legal identifier for your vehicle. This is the primary identification number for your Toyota. It is used in registering the ownership of your vehicle.

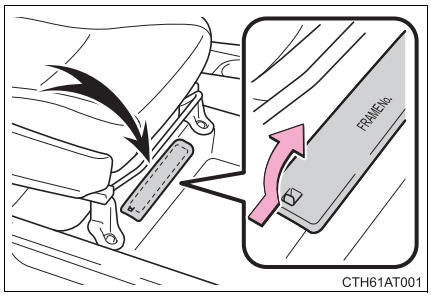

This number is stamped under the right-hand front seat.

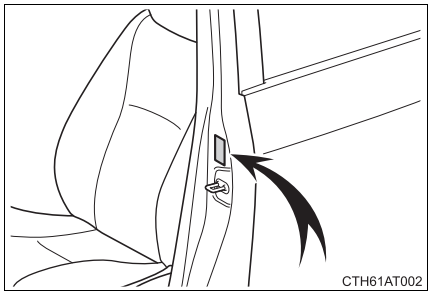

This number is also on the manufacturer's label on the left-hand side center pillar.

■ Engine number

The engine number is stamped on the engine block as shown.

1NR-FE engine

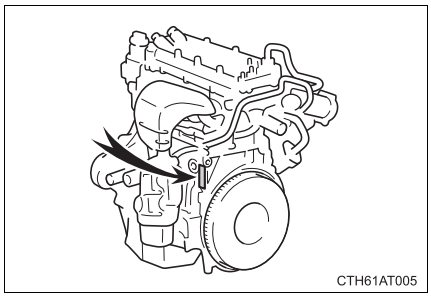

1ND-TV engine

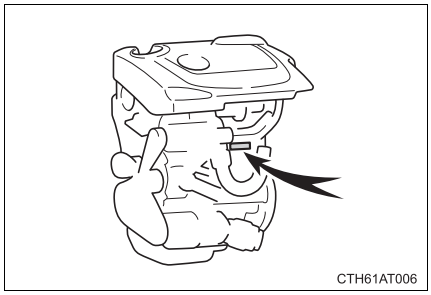

Engine

Gasoline engine

Model	1NR-FE
Type	4-cylinder in line, 4-cycle, gasoline
Bore and stroke	72.5 × 80.5 mm (2.85 × 3.17 in.)
Displacement	1329 cm^3 (81.1 cu.in.)
Valve clearance (engine cold)	Automatic adjustment
Drive belt tension	Automatic adjustment

Diesel engine

Model	1ND-TV
Type	4-cylinder in line, 4-cycle, diesel
Bore and stroke	73.0 × 81.5 mm (2.87 × 3.21 in.)
Displacement	1364 cm^3 (83.2 cu.in.)
Valve clearance (engine cold)	Intake: 0.11 — 0.17 mm (0.004 — 0.007 in.) Exhaust: 0.14 — 0.20 mm (0.006 — 0.008 in.)
Drive belt tension	Automatic adjustment

NOTICE

Drive belt type

The high strength drive belt is used for the generator side drive belt. When replacing the drive belt, use Toyota genuine drive belt or equivalent high strength drive belt. If the high strength drive belt is not used, durability of the belt may become less than expected. The high strength drive belt is a belt with Aramid core which has higher strength compared to usually available belts with PET or PEN core.

Fuel

Gasoline engine

Fuel type	EU area: Unleaded gasoline conforming to European standard EN228 only Except EU area: Unleaded gasoline only
Research octane number	95 or higher
Fuel tank capacity (Reference)	42 L (11.1 gal., 9.2 Imp. gal.)

Diesel engine

Fuel type	EU area: Diesel fuel conforming to European standard EN590 Except EU area: Diesel fuel that contains 50 ppm or less of sulfur
Cetane number	48 or higher
Fuel tank capacity (Reference)	42 L (11.1 gal., 9.2 Imp. gal.)

Lubrication system

Oil capacity (Drain and refill — reference*) **With filter**	**1NR-FE engine** 3.4 L (3.6 qt., 3.0 Imp. qt.) **1ND-TV engine** 3.9 L (4.1 qt., 3.4 Imp. qt.)
Without filter	**1NR-FE engine** 3.2 L (3.4 qt., 2.8 Imp. qt.) **1ND-TV engine** 3.5 L (3.7 qt., 3.1 Imp. qt.)

*: The engine oil capacity is a reference quantity to be used when changing the engine oil. Warm up and turn off the engine, wait more than 5 minutes, and check the oil level on the dipstick.

■ Engine oil selection

“Toyota Genuine Motor Oil” is used in your Toyota vehicle. Toyota recommends the use of approved “Toyota Genuine Motor Oil”. Another motor oil of matching quality can also be used.

1NR-FE engine

Oil grade:

0W-20, 5W-20, 5W-30 and 10W-30:
API grade SL “Energy-Conserving”, SM “Energy-Conserving”, SN “Resource-Conserving” or ILSAC multigrade engine oil

15W-40 and 20W-50:
API grade SL, SM or SN multigrade engine oil

Recommended viscosity (SAE):

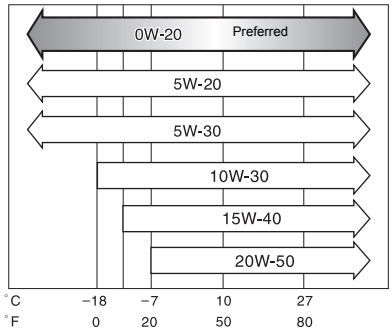

Temperature range anticipated before next oil change.

ITIOIL128

SAE 0W-20 is filled into your Toyota vehicle at manufacturing, and the best choice for good fuel economy and good starting in cold weather.

If SAE 0W-20 oil is not available, SAE 5W-30 oil may be used. However, it should be replaced with SAE 0W-20 at the next oil change.

If you use SAE 10W-30 or a higher viscosity engine oil in extremely low temperatures, the engine may become difficult to start, so SAE 0W-20, 5W-20 or 5W-30 engine oil is recommended.

Oil viscosity (0W-20 is explained here as an example):

- The 0W in 0W-20 indicates the characteristic of the oil which allows cold startability. Oils with a lower value before the W allow for easier starting of the engine in cold weather.
- The 20 in 0W-20 indicates the viscosity characteristic of the oil when the oil is at high temperature. An oil with a higher viscosity (one with a higher value) may be better suited if the vehicle is operated at high speeds, or under extreme load conditions.

How to read oil container labels:

Either or both API registered marks are added to some oil containers to help you select the oil you should use.

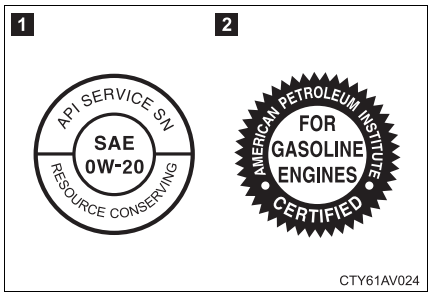

1 API Service Symbol

Top portion: “API SERVICE SN” means the oil quality designation by American Petroleum Institute (API).
Center portion: “SAE 0W-20” means the SAE viscosity grade.
Lower portion: “Resource-Conserving” means that the oil has fuel-saving and environmental protection capabilities.

2 ILSAC Certification Mark

The International Lubricant Specification Advisory Committee (ILSAC) Certification Mark is displayed on the front of the container.

1ND-TV engine

Oil grade: ACEA C2

⚠ NOTICE
Using engine oil other than ACEA C2 may damage the catalytic converter.

Recommended viscosity (SAE):

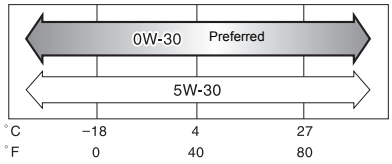

Temperature range anticipated before next oil change.

ITIOIL135

SAE 0W-30 is filled into your Toyota vehicle at manufacturing, and the best choice for good fuel economy and good starting in cold weather.

Oil viscosity (0W-30 is explained here as an example):

- The 0W in 0W-30 indicates the characteristic of the oil which allows cold startability. Oils with a lower value before the W allow for easier starting of the engine in cold weather.
- The 30 in 0W-30 indicates the viscosity characteristic of the oil when the oil is at high temperature. An oil with a higher viscosity (one with a higher value) may be better suited if the vehicle is operated at high speeds, or under extreme load conditions.

Cooling system

Capacity (Reference)	1NR-FE engine	**Multidrive** 4.8 L (5.1 qt., 4.2 Imp. qt.) **Manual transmission** 4.6 L (4.9 qt., 4.0 Imp. qt.)
	1ND-TV engine	**Without power heater** 4.9 L (5.2 qt., 4.3 Imp. qt.) **With power heater** 5.3 L (5.6 qt., 4.7 Imp. qt.)
Coolant type		Use either of the following: • “Toyota Super Long Life Coolant” • A similar high-quality ethylene glycol-based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology Do not use plain water alone.

Ignition system (gasoline engine only)

Spark plug Make Gap	 DENSO SC20HR11 1.1 mm (0.043 in.)

NOTICE

Iridium-tipped spark plugs

Use only iridium-tipped spark plugs. Do not adjust the spark plug gap.

Electrical system

Battery Open voltage* at 20°C (68°F):	12.6 — 12.8 V Fully charged 12.2 — 12.4 V Half charged 11.8 — 12.0 V Discharged (*: Voltage checked 20 minutes after the engine and all the lights turned off)
Charging rates	5 A max.

Multidrive

Fluid capacity (Reference)	6.42 L (6.79 qt., 5.65 Imp. qt.)
Fluid type	Toyota Genuine CVT FLUID FE

The fluid capacity is the quantity of reference. If replacement is necessary, contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

NOTICE

Multidrive fluid type

Using Multidrive fluid other than “Toyota Genuine CVT FLUID FE” may cause deterioration in shift quality, locking up of your transmission accompanied by vibration, and ultimately damage the transmission of your vehicle.

Manual transaxle

Gear oil capacity (Reference)	2.4 L (2.5 qt., 2.1 Imp. qt.)
Gear oil type	TOYOTA Genuine Manual Transmission Gear Oil LV API GL-4
Recommended gear oil viscosity	SAE 75W

NOTICE

Manual transaxle gear oil

Using a manual transmission gear oil other than “TOYOTA Genuine Manual Transmission Gear Oil LV API GL-4 SAE 75W” may cause occurrences of rattling noises while idling and poor fuel consumption.

Clutch

Pedal free play	5 — 15 mm (0.2 — 0.6 in.)
Fluid type	SAE J1703 or FMVSS No.116 DOT 3 or SAE J1704 or FMVSS No.116 DOT 4

Brakes

Pedal clearance*1	1NR-FE engine	**Left-hand drive vehicles** 88 mm (3.46 in.) Min. **Right-hand drive vehicles** 79 mm (3.11 in.) Min.
	1ND-TV engine	85 mm (3.35 in.) Min.
Pedal free play		1 — 6 mm (0.04 — 0.24 in.)
Parking brake lever travel *2		8 — 11 clicks
Fluid type		SAE J1703 or FMVSS No.116 DOT 3 or SAE J1704 or FMVSS No.116 DOT 4

*1: Minimum pedal clearance when depressed with a force of 300 N (30.6 kgf, 67.4 lbf) while the engine is running

*2: Parking brake lever travel when pulled up with a force of 196 N (20 kgf, 44 lbf)

Steering

Free play	Less than 30 mm (1.2 in.)

Tires and wheels

Tire size	185/65R15 88H, 185/60R16 86H, T135/70D16 100M
Tire inflation pressure (Recommended cold tire inflation pressure)	230 kPa (2.3 kgf/cm^2 or bar, 33 psi)
Tire inflation pressure (compact spare) (Recommended cold tire inflation pressure)	420 kPa (4.2 kgf/cm^2 or bar, 60 psi)
Wheel size	15 × 5 1/2 J, 16 × 5 1/2 J, 16 × 4T (compact spare)
Wheel nut torque	103 N•m (10.5 kgf•m, 76 ft•lbf)

Light bulbs

	Light bulbs	W	Type
Exterior	Headlights	60/55	A
	Front fog lights (if equipped)	55	B
	Front position lights	5	C
	Front turn signal lights	21	D
	Back-up light	16	C
	Rear fog light	21	C
	Stop/tail lights	21/5	C
	License plate lights	5	C
	Rear turn signal lights	21	D
Interior	Personal lights*1	8	C
	Personal/interior lights*2	8	C
	Interior light	8	E
	Luggage compartment light	5	E

A: H4 halogen bulbs
B: H11 halogen bulbs
C: Wedge base bulbs (clear)
D: Wedge base bulbs (amber)
E: Double end bulbs

*1: Vehicles without a panoramic roof shade
*2: Vehicles with a panoramic roof shade

Fuel information

Gasoline engine

EU area:
Your vehicle must use only unleaded gasoline conforming to European standard EN228.
For optimum engine performance, select unleaded gasoline with a Research Octane Number of 95 or higher.

Except EU area:
Your vehicle must use only unleaded gasoline.
For optimum engine performance, select unleaded gasoline with a Research Octane Number of 95 or higher.

Diesel engine

EU area:
Your vehicle must use only diesel fuel conforming to European standard EN590.

Except EU area:
Your vehicle must use only diesel fuel that contains 50 ppm or less of sulfur and has a cetane number of 48 or higher.

■ **Fuel tank opening for unleaded gasoline**

To help prevent incorrect fueling, your vehicle has a fuel tank opening that only accommodates the special nozzle on unleaded fuel pumps.

■ **If you plan to drive in foreign countries**

Low sulfur diesel fuel may not be available, so please check the availability with your distributor.

■ **If your engine knocks**

- Consult any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
- You may occasionally notice light knocking for a short time while accelerating or driving uphill. This is normal and there is no need for concern.

NOTICE

Notice on fuel quality

- Do not use improper fuels. If improper fuels are used, the engine will be damaged.
- Do not use leaded gasoline.
  Leaded gasoline will cause the three-way catalytic converter to lose its effectiveness and the emission control system to function improperly.
- Gasoline engine (EU area): Bioethanol fuel sold under names such as “E50” or “E85” and fuel containing a large amount of ethanol should not be used. The use of these fuels will damage the vehicle's fuel system. In case of any doubt, ask any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
- Gasoline engine (except EU area): Bioethanol fuel sold under names such as “E50” or “E85” and fuel containing a large amount of ethanol should not be used. Your vehicle can use gasoline mixed with 10% max ethanol. The use of fuel with more than 10% ethanol content (E10) will damage the vehicle’s fuel system. You must ensure that refueling is carried out only from a source where fuel specification and quality can be guaranteed. In case of any doubt, ask any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

NOTICE

Notice on diesel fuel quality

- Do not use improper fuels. If improper fuels are used, the engine will be damaged.
- Do not use a fuel that contains more than 50 ppm of sulphur.
  Use of such a high sulphur fuel may damage the engine.
- Diesel engine (EU area): FAME (Fatty Acid Methyl Ester) fuel sold under names such as “B30” or “B100” and fuel containing a large amount of FAME should not be used. The use of these fuels will damage the vehicle's fuel system. In case of any doubt, ask any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.
- Diesel engine (except EU area): FAME (Fatty Acid Methyl Ester) fuel sold under names such as “B30” or “B100” and fuel containing a large amount of FAME should not be used. Your vehicle can use diesel mixed with 5% max biodiesel FAME (B5). The use of fuel with more than 5% FAME content (B5) will damage the vehicle’s fuel system. You must ensure that refueling is carried out only from a source where fuel specification and quality can be guaranteed. In case of any doubt, ask any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Customizable features

Your vehicle includes a variety of electronic features that can be personalized to suit your preferences. Programming these preferences requires specialized equipment and may be performed by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional.

Some function settings are changed simultaneously with other functions being customized. Contact any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for further details.

Customizable Features

1 Settings that can be changed using the navigation/multimedia system*
(For further information on customizing settings using the navigation/multimedia system, refer to the “Navigation and multimedia system Owner’s manual”.)

2 Settings that can be changed by any authorized Toyota dealer or repairer, or another duly qualified and equipped professional for further details

Definition of symbols: O = Available, — = Not available

Item	Function	Default setting	Customized setting	1	2
Smart entry & start system (→P. 33)	Smart entry & start system	ON	OFF	O	O
	Operation signal (Emergency flashers)	ON	OFF	O	O

*: Vehicles with a navigation/multimedia system

Item	Function	Default setting	Customized setting	1	2
Smart entry & start system (→P. 33)	Time elapsed before automatic door lock function is activated if door is not opened after being unlocked	30 seconds	60 seconds	—	O
			120 seconds	—	O
	Open door warning function (when locking the vehicle)	ON	OFF	—	O
Wireless remote control (→P. 59)	Wireless remote control	ON	OFF	—	O
	Time elapsed before automatic door lock function is activated if door is not opened after being unlocked	30 seconds	60 seconds	—	O
			120 seconds	—	O
	Operation signal (Emergency flashers)	ON	OFF	—	O
	Open door warning function (when locking the vehicle)*1	ON	OFF	—	O

Item	Function	Default setting	Customized setting	1	2
Door lock (→P. 68)	Speed-detecting automatic door lock function	ON	OFF	O	O
	Opening driver's door unlocks all doors	OFF	ON	O	O
	Shifting gears to P unlocks all doors. (vehicles with a Multidrive)	OFF	ON	O	O
	Shifting gears to position other than P locks all doors. (vehicles with a Multidrive)	OFF	ON	O	O
Automatic light control system (→P. 222)	Light sensor sensitivity	Level 3	Level 1 to 5	O	O
	Sensitivity of the ambient light sensor used for dimming the indicator on the air conditioning control buttons.	Standard	-2 to 2	—	O
	Sensitivity of the ambient light sensor used for brightening the indicator on the air conditioning control buttons.	Standard	-2 to 2	—	O

Item	Function	Default setting	Customized setting	1	2
Lights (→P. 222)	Daytime running light system (if equipped)	ON	OFF	O	O
	Time that the low beam headlights are on when the vehicle is parked	30 seconds	60 seconds	—	O
			90 seconds		
			120 seconds		
Illumination (→P. 330)	Time elapsed before the interior lights turn off	15 seconds	7.5 seconds	—	O
			30 seconds		
	Operation when the doors are unlocked	ON	OFF	—	O
	Operation after the engine switch is turned OFF	ON	OFF	—	O
	Operation when you approach the vehicle with the electronic key on your person*1	ON	OFF	—	O
	Footwell lighting	ON	OFF	—	O
	Footwell lights dimmer control while driving	ON	OFF	—	O

Item	Function	Default setting	Customized setting	1	2
Automatic air conditioning system (→P. 280)	Switching between outside air and recirculated air mode linked to “AUTO” switch operation	Auto	Manual	O	O
Alarm*2 (→P. 119)	Operation when doors are unlocked using the key (vehicles without a smart entry & start system) or mechanical key (vehicles with a smart entry & start system)	OFF	ON	—	O

*1: Vehicles with smart entry & start system

*2: Right-hand drive vehicles

Index

Abbreviation list 542

Alphabetical index..... 543

What to do if... 557

Vehicles with a navigation/multimedia system:
For details of equipment related to the navigation/multimedia system, such as the audio system, refer to “Navigation and multimedia system Owner's manual”.

Abbreviation/Acronym list

ABBREVIATIONS	MEANING
A/C	Air Conditioning
ABS	Anti-lock Brake System
ACC	Accessory
CRS	Child Restraint System
DPF	Diesel Particulate Filter system
ECU	Electronic Control Unit
ELR	Emergency Locking Retractor
EPS	Electric Power Steering
GVM	Gross Vehicle Mass
LED	Light Emitting Diode
MPAC	Maximum Permissible Axle Capacity
PEN	Polyethylene Naphthalate
PET	Polyethylene Terephthalate
PTC	Positive Temperature Coefficient
SRS	Supplemental Restraint System
TRC	Traction Control
VIN	Vehicle Identification Number
VSC	Vehicle Stability Control
VSC+	Vehicle Stability Control+

Alphabetical index

A

A/C **274, 280**
ABS **249**
Air conditioning filter **399**
Air conditioning system
- Air conditioning filter 399
- Automatic air conditioning system 280
- Manual air conditioning system 274

Airbags
- Airbag manual on-off system 135
- Airbag operating conditions 126
- Airbag precautions for your child 130
- Airbag warning light 446
- Curtain shield airbag operating conditions 126
- Curtain shield airbag precautions 130
- General airbag precautions ... 130
- Locations of airbags 124
- Modification and disposal of airbags 134
- Proper driving posture ... 122, 130
- Side airbag operating conditions 126
- Side airbag precautions 130
- SRS airbags 124

Antenna **365**
Anti-lock brake system **249**
Armrest **347**
Assist grips **351**
Audio input **326**
Audio system
- Antenna 295
- Audio input 326
- AUX port 326
- CD player 296
- iPod 308
- MP3/WMA disc 301
- Optimal use 324
- Portable music player 326
- Radio 292
- Steering wheel audio switch 327
- Type 290
- USB memory 316

Automatic air conditioning system **280**
Automatic light control system **222**
AUX port **326**
Auxiliary box **334, 355**

B

Back door 74
Back-up light
Replacing light bulbs 422
Wattage 532
Battery
Checking 386
If the vehicle has a discharged battery 497
Preparing and checking before winter 259
Bluetooth® audio*
Bluetooth® phone*
Bottle holders 336
Brake
Parking brake 205
Brake assist 249
Break-in tips 165

C

Camera*
Care
Exterior 362
Interior 366
Seat belts 367
Cargo hooks 354
CD player 296
Chains 259
Child-protectors 70
Child restraint system
Baby seats, definition 138
Baby seats, installation 147
Child seats, definition 138
Child seats, installation 147
Installing CRS with ISOFIX rigid anchor 152
Installing CRS with seat belts 148
Installing CRS with top straps 153
Junior seats, definition 138
Junior seats, installation 147

Child safety
Airbag precautions 130
Battery precautions 389, 503
Child-protectors..... 70
Child restraint system 138
How your child should wear the seat belt 91
Installing child restraints..... 147
Panoramic roof shade precautions 349
Power window lock switch 100
Power window precautions ... 102
Removed key battery precautions 405
Seat belt precautions 91
Seat heater precautions 346
Cleaning
Exterior..... 362
Interior..... 366
Seat belts..... 367
Clock..... 341
Condenser..... 386
Cooling system
Engine overheating..... 505
Cruise control 245
Cup holders..... 338
Curtain shield airbags..... 124
Customizable features 536

*: Refer to “Navigation and multimedia system Owner’s manual”.

D

Daytime running light system 225
Deck board 354
Defogger
Rear window 288
Side mirror 288
Dimension 518
Display
Trip information 219
Do-it-yourself maintenance 372
Doors
Door lock..... 33, 59, 68
Door windows 100
Double locking system 117
Side mirrors..... 98
DPF
Diesel Particulate Filter system 255
Warning light 447
Driver's seat belt reminder light..... 447
Driving
Break-in tips 165
Correct posture 122
Procedures..... 160
Winter driving tips 259
Dual-level deck board..... 354

E

Electric power steering 249
Electronic key
If the electronic key does not operate properly 492
Replacing the battery..... 402
Emergency flashers
Switch 432
Emergency, in case of
If the electronic key does not operate properly 492
If the engine will not start..... 486
If the shift lever cannot be shifted..... 490
If the shift lever cannot be shifted from P 489
If the vehicle has a discharged battery..... 497
If the warning buzzer sounds..... 443
If the warning light turns on 443
If you have a flat tire 456, 469
If you lose your keys 491
If you run out of fuel and the engine stalls 510
If you think something is wrong..... 441
If your vehicle becomes stuck 512
If your vehicle has to be stopped in an emergency..... 514
If your vehicle needs to be towed..... 433
If your vehicle overheats..... 505

Emergency tire puncture repair kit 469
Engine
Compartment 378
Engine switch 176, 186
Hood 375
How to start the engine 176, 186
Identification number 519
If the engine will not start 486
If you run out of fuel and the engine stalls 510
Ignition switch 176, 186
Overheating 505
Engine coolant
Capacity 527
Checking 384
Preparing and checking before winter 259
Engine immobilizer system 107
Engine oil
Capacity 523
Checking 380
Preparing and checking before winter 259
"ENGINE START STOP" switch light 330
EPS 249

F

Floor mat 352
Fluid
Washer 390
Fog lights
Replacing light bulbs 422
Switch 228
Wattage 532
Front fog lights
Replacing light bulbs 422
Switch 228
Wattage 532
Front passenger's seat belt reminder light 447
Front position lights
Replacing light bulbs 422
Switch 222
Wattage 532

Front seats
Adjustment 79
Front turn signal lights
Replacing light bulbs 422
Switch 204
Wattage 532
Fuel
Capacity 522
Fuel gauge 207
Fuel pump shut off system 442
Gas station information 560
If you run out of fuel and the engine stalls 510
Information 533
Refueling 103
Type 522
Fuel door 103
Fuel filler door 103
Fuel pump shut off system 442
Fuses 406

G
Gas station information 560
Gauges 207
Gear Shift Indicator 202
Glove box 334
Grocery bag hook 335

H
Hazard lights
Switch 432
Head restraints
Adjusting 85
Headlights
Replacing light bulbs 422
Switch 222
Wattage 532
Heaters
Seat heaters 345
Side mirror 288
Hood 375
Hooks
Cargo hook 354
Grocery bag hook 335
Horn 206

I

Identification
- Engine 519
- Vehicle 519

Ignition switch 176, 186
Illuminated entry system 330
Indicator lights 213
Inside rear view mirror 96
Intercooler 386
Interior light
- Interior light 330
- Switch 332
- Wattage 532

J

Jack
- Positioning a floor jack 376
- Vehicle-equipped jack 456

Jack handle 456

K

Keyless entry 33
Keys
- Electronic key 30
- Engine switch 176, 186
- If the electronic key does not operate properly 492
- If you lose your keys 491
- Ignition switch 176, 186
- Key number 30
- Keyless entry 33
- Keys 30
- Mechanical key 30
- Wireless remote control key ... 59

L

License plate lights
- Replacing light bulbs 422
- Wattage 532

Light bulbs
- Replacing 422
- Wattage 532

Lights
- Emergency flasher switch 432
- Fog light switch 228
- Hazard light switch 432
- Headlights switch 222
- Interior light switch 331
- Personal light switch 331
- Replacing light bulbs 422
- Turn signal lever 204
- Wattage 532

Lock steering column..... 183, 188

M

Maintenance
- Do-it-yourself maintenance ... 372
- Maintenance data 518
- Maintenance requirements ... 369

Manual air conditioning system 274

Manual headlight leveling dial 223

Manual transmission
- Gear Shift Indicator 202
- Manual transmission 201

Meter
- Meter light control 209
- Meters 207

Microphone*

Mirrors
- Inside rear view mirror 96
- Side mirror heater 288
- Side mirrors 98
- Vanity mirrors 340

MP3 disc **301**
Multidrive
Multidrive..... 190
Multi-information display **219**
Multi-mode manual transmission
Easy (E) mode 198
Easy sports (Es) mode..... 197
If the shift lever cannot be shifted 490
Manual (M) mode..... 197
Multi-mode manual transmission 196

O
Odometer..... **207**
Oil
Engine oil 380
Opener
Back door..... 74
Fuel filler door 103
Hood 375
Outside rear view mirrors
Adjusting and folding 98
Outside temperature display **342**
Overheating, Engine..... **505**

P
Panoramic roof shade..... **348**
Parking brake..... **205**
Personal lights
Switch 331
Wattage 532
Personal/interior lights
Switch 331
Wattage 532
Power heater **286**
Power outlets **343**
Power windows..... **100**

*: Refer to “Navigation and multimedia system Owner’s manual”.

R

Radiator 386
Radio 292
RDS (Radio data system) 293
Rear fog light
Replacing light bulbs 422
Switch 228
Wattage 532
Rear seat
Adjustment 80
Folding down 81
Rear turn signal lights
Replacing light bulbs 422
Wattage 532
Rear view monitor system*
Rear window defogger 288
Rear window wiper 236
Replacing
Fuses 406
Key battery 402
Light bulbs 422
Tires 456

S

Seat belts
Adjusting the seat belt 87
Child restraint system installation 147
Cleaning and maintaining the seat belts 367
Emergency Locking Retractor (ELR) 90
How to wear your seat belt 87
How your child should wear the seat belt 91
Pregnant women, proper seat belt use 90
Reminder light 447
Seat belt pretensioners 89
Seat heaters 345

Seats
Adjustment 79
Adjustment precautions 79
Child seats/child restraint system installation 147
Cleaning 366
Head restraint 85
Properly sitting in the seat..... 122
Rear seat adjustment 80
Rear seat adjustment precautions 83
Seat heaters 345
Service reminder indicators 213
Shift lever
If the shift lever cannot be shifted 490
Manual transmission 201
Multidrive 190
Multi-mode manual transmission 196
Shift lock system 489, 490
Side airbags 124
Side mirror
Adjusting and folding 98
Smart entry & start system
Entry function 33
Starting the engine 176
Spare tire
Inflation pressure 531
Storage location 456
Spark plug 527
Specifications 518
Speedometer 207
Steering
Column lock release 183, 188
Steering wheel
Adjustment 94
Audio switches 327
Stop & Start cancel switch 240
Stop & Start system 238
Stop & Start system operation time 208
Stop & Start system total operation time 209
Stop lights
Replacing light bulbs 422
Wattage 532
Storage feature 333
Storage precautions 257
Stuck
If your vehicle becomes stuck 512
Sun visors 339

*: Refer to “Navigation and multimedia system Owner’s manual”.

Sunshade
Panoramic roof.....348
Switch
Airbag manual on-off switch.....135
Emergency flasher switch.....432
Engine switch.....176, 186
Fog light switch 228
Hazard light switch.....432
Ignition switch 176, 186
Light switches 222
“MMT-Es” switch 197
Power door lock switch 68
Power window switch.....100
“SPORT” switch 191
Stop & Start cancel switch 240
Window lock switch.....100
Wiper and washer.....230, 236

T

Tachometer 207
Tail lights
Replacing light bulbs.....422
Switch 222
Wattage 532
Telephone switch*
Theft deterrent system
Double locking system.....117
Engine immobilizer system ...107
Tire inflation pressure.....395
Tires
Chains.....259
Checking.....392
If you have a flat tire 456, 469
Inflation pressure 395
Replacing.....456
Rotating tires.....392
Size.....531
Snow tires.....259
Spare tire 456
Tools 456, 469
Total load capacity 518
Towing
Emergency towing 434
Trailer towing 263
Traction control 249
Transmission shift switches 197, 198
Tray 337
TRC 249
Trip information 219
Trip meter 207
Turn signal lights
Replacing light bulbs.....422
Switch 204
Wattage 532

V

Vanity mirrors 340
Vehicle identification number 519
Vehicle stability control 249
VSC 249

W

Warning buzzers
Brake system 443
Clutch 444
Electric power steering system 446
Multi-mode manual transmission 444
Seat belt reminder 447
Warning lights
Anti-lock brake system 446
Brake assist system 446
Brake system 443
Charging system 444
Clutch 444
Cruise control indicator light 446
Diesel Particulate Filter system 447
Electric power steering system 446
Electronic engine control system 446
Engine oil level 447
Engine oil maintenance 447
Engine oil pressure 444
Fuel filter 446
High engine coolant temperature warning light ... 444
Low fuel level 447
Malfunction indicator lamp 446
Multi-mode manual transmission 444
Open door 447
Pretensioners 446
Seat belt reminder light 447
Slip indicator light 446
Smart entry & start system 446, 451
SRS airbags 446
Stop & Start indicator light 446
VSC OFF indicator light 446

*: Refer to “Navigation and multimedia system Owner’s manual”.

Washer
Checking 390
Preparing and checking
before winter 259
Switch 230, 236
Washing and waxing 362
Weight 518
Wheels 397
Window glasses 100
Window lock switch 100
Windows
Power windows 100
Rear window defogger 288
Washer 230, 236
Windshield wipers 230
Wireless remote control key
Replacing the battery 402
Wireless remote control 59
WMA disc 301

What to do if...

A tire punctures	P. 456 P. 469	If you have a flat tire
The engine does not start	P. 486	If the engine will not start
	P. 510	If you run out of fuel and the engine stalls
	P. 107	Engine immobilizer system
	P. 497	If the battery is discharged
The shift lever cannot be moved out	P. 489	If the shift lever cannot be shifted from P
	P. 490	If the shift lever cannot be shifted
The high engine coolant temperature warning light flashes or comes on	P. 505	If your vehicle overheats
Steam can be seen coming from under the hood		
The key is lost	P. 491	If you lose your keys
The battery runs out	P. 497	If the battery is discharged
The doors cannot be locked	P. 68	Side doors
	P. 74	Back door
The horn begins to sound	P. 119	Alarm

The vehicle is stuck in mud or sand	P. 512	If the vehicle becomes stuck
A warning light or indicator light comes on	P. 443	If a warning light turns on or a warning buzzer sounds...

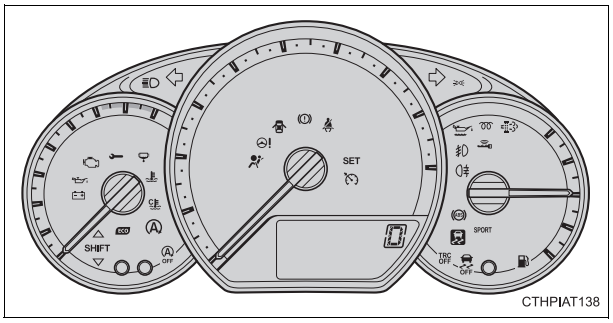

■Warning lights

Brake system warning light	P. 443
Charging system warning light	P. 444
Low engine oil pressure warning light	P. 444
High engine coolant temperature warning light	P. 444
Multi-mode manual transmission warning light	P. 444
Malfunction indicator lamp	P. 446
SRS warning light	P. 446
ABS warning light	P. 446
Electric power steering warning light	P. 446
Stop & Start cancel indicator light*	P. 446
Slip indicator light	P. 446
Fuel filter warning light	P. 446
Cruise control indicator light*	P. 446
Open door warning light	P. 447
Low fuel level warning light	P. 447
Driver's and front passenger's seat belt reminder light	P. 447
Rear passengers' seat belt reminder lights	P. 447
Low engine oil level warning light	P. 447
DPF system warning light	P. 447
Engine oil change reminder light	P. 447
Smart entry & start system indicator light	P. 446, 451

*: The light flashes to indicate a malfunction.

GAS STATION INFORMATION

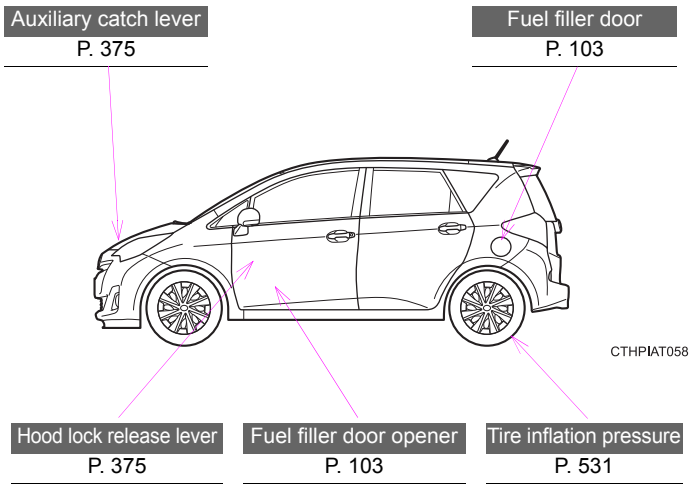

Fuel tank capacity (Reference)	42 L (11.1 gal., 9.2 Imp. gal.)
Fuel type	P. 522
Cold tire inflation pressure	P. 531
Engine oil capacity (Drain and refill — reference)	P. 523
Engine oil type	P. 523