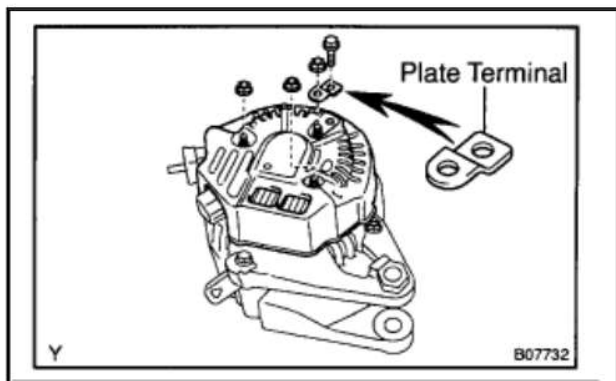


Page 1 of 9


Disassembly and Reassembly**DISASSEMBLY**

ZOOM

SIZED FOR PRINT

1. REMOVE REAR END COVER

- a. Remove the nut and terminal insulator.
- b. Remove the bolt, 3 nuts, plate terminal and end cover.

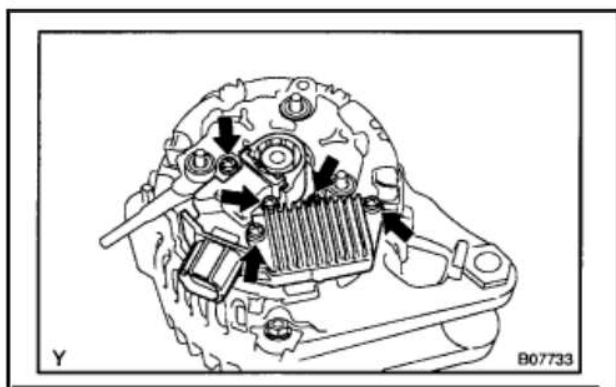


ZOOM

SIZED FOR PRINT

2. REMOVE BRUSH HOLDER AND VOLTAGE REGULATOR

- a. Remove the brush holder cover from the brush holder.
- b. Remove the 5 screws, brush holder and voltage regulator.
- c. Remove the seal plate from the rectifier end frame.



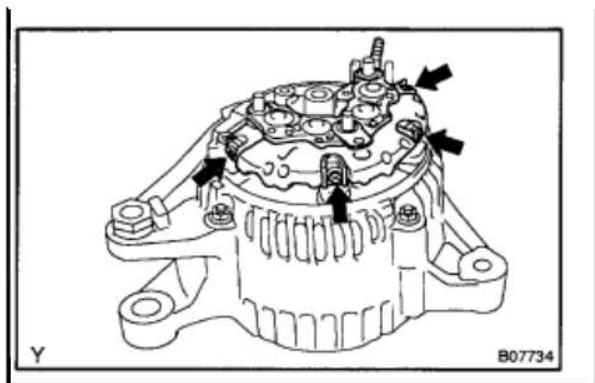


ZOOM

SIZED FOR PRINT

3. REMOVE RECTIFIER HOLDER

- a. Remove the 4 screws and rectifier holder.
- b. Remove the 4 rubber insulators.

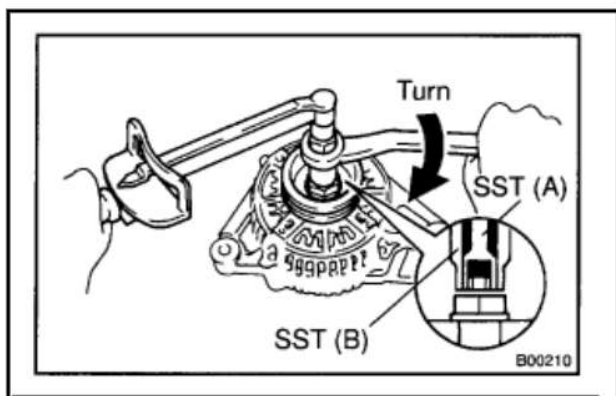


ZOOM

SIZED FOR PRINT

4. REMOVE PULLEY

- a. Hold SST (A) with a torque wrench, and tighten SST (B) clockwise to the specified torque. SST 09820-63010
Torque: **39 Nm (400 kg.cm, 29 ft.lb)**
- b. Check that SST (A) is secured to the [rotor](#) shaft.

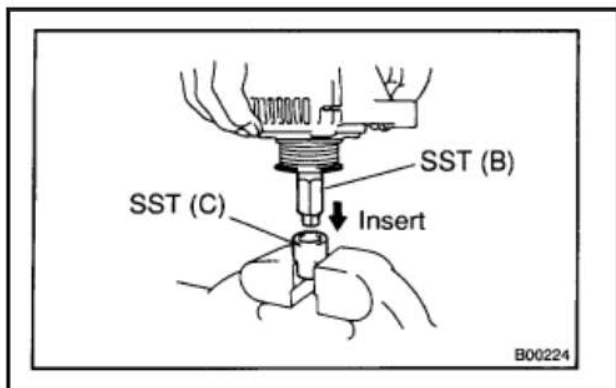


ZOOM

SIZED FOR PRINT

Page 3 of 9


- c. Mount SST (C) in a vise.
- d. Insert SST (B) into SST (C), and attach the pulley nut to SST (C).

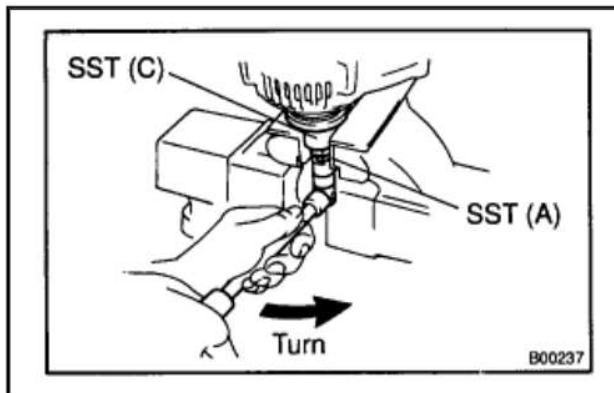

ZOOM

SIZED FOR PRINT


- e. To loosen the pulley nut, turn SST (A) in the direction shown in the illustration. **NOTE:** To prevent damage to the [rotor](#) shaft, do not loosen the pulley nut more than one-half of a turn.
- f. Remove the generator from SST (C).

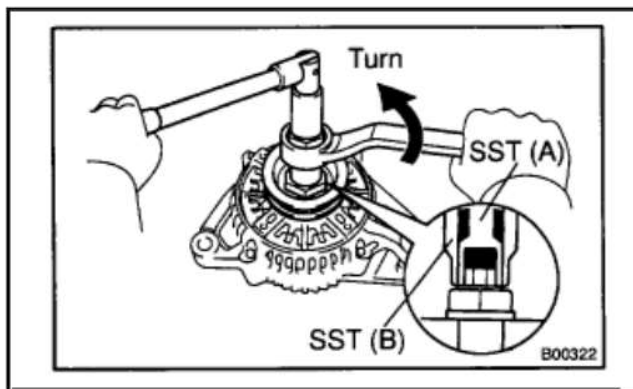

ZOOM

SIZED FOR PRINT

- g. Turn SST (B), and remove SST (A and B).
- h. Remove the pulley nut and pulley.

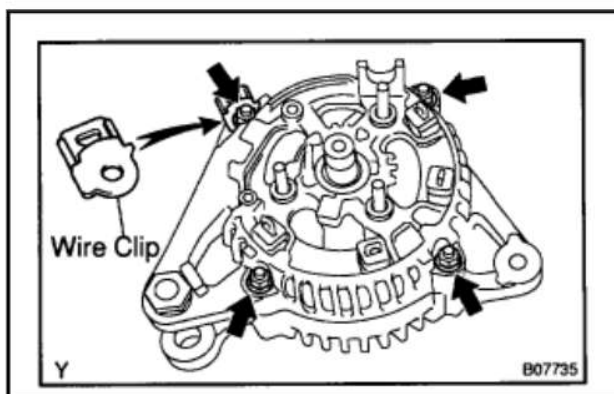


ZOOM

SIZED FOR PRINT

5. REMOVE RECTIFIER END FRAME

- a. Remove the 4 nuts and wire clip.

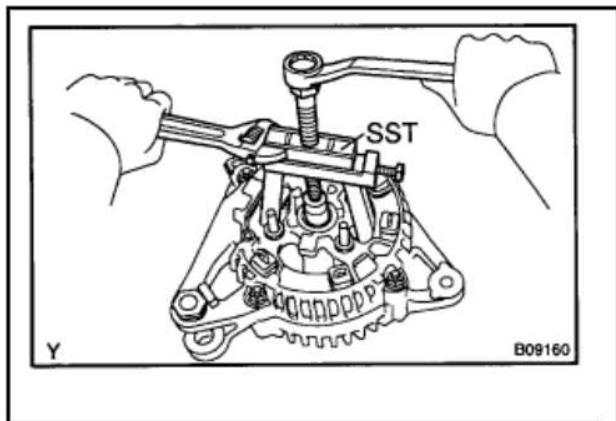


ZOOM

SIZED FOR PRINT

- b. Using SST, remove the rectifier end frame. SST O9286-46011
- c. Remove the generator washer from the [rotor](#)

6. REMOVE [ROTOR](#) FROM DRIVE END FRAME

REASSEMBLY

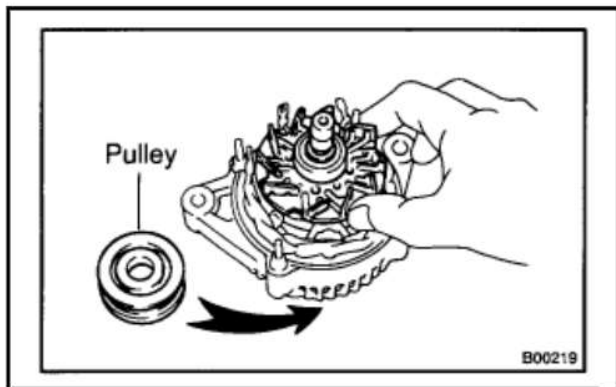


ZOOM

SIZED FOR PRINT

1. INSTALL [ROTOR](#) TO DRIVE END FRAME

- a. Place the drive end frame on the pulley.
- b. Install the [rotor](#) to the drive end frame.



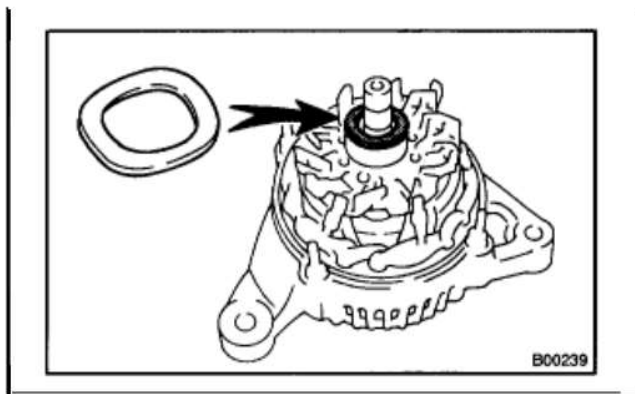


ZOOM

SIZED FOR PRINT

2. INSTALL RECTIFIER END FRAME


- a. Place the generator washer on the [rotor](#).

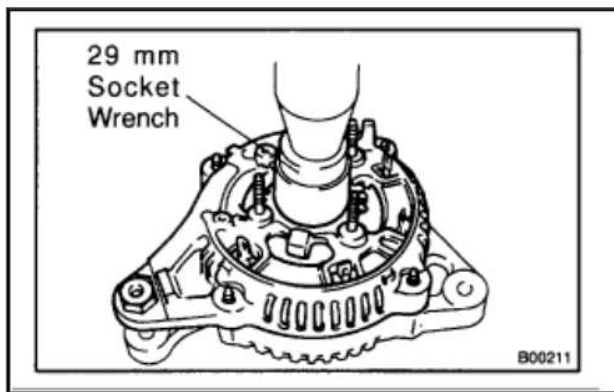

ZOOM

SIZED FOR PRINT


- b. Using a 29 mm socket wrench and press, slowly press in the rectifier end frame.

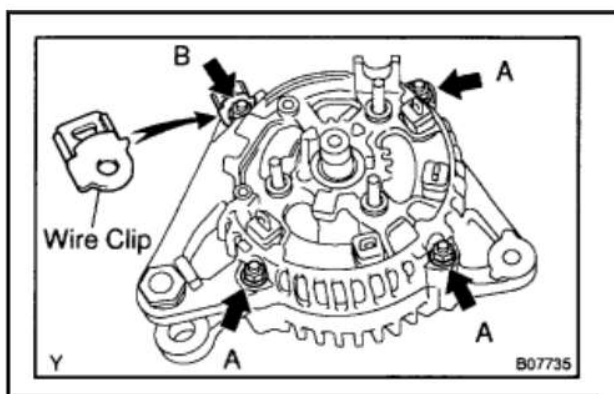

ZOOM

SIZED FOR PRINT

- c. Install the wire clip and 4 nuts. Torque: Nut A 4.5 Nm (46 kg.cm, 40 in.lb) Nut B 5.4 Nm (55 kg.cm, 48 in.lb)

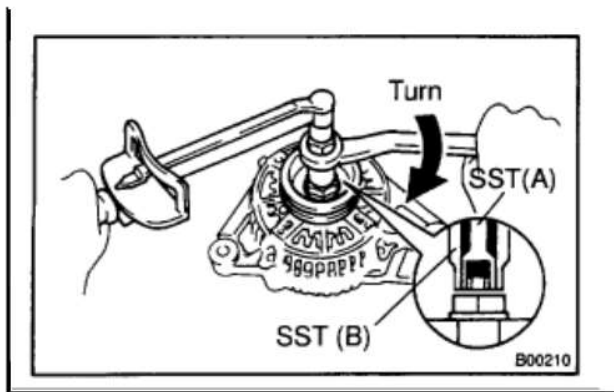


ZOOM

SIZED FOR PRINT

3. INSTALL PULLEY


- a. Install the pulley to the [rotor](#) shaft by tightening the pulley nut by hand.
- b. Hold SST (A) with a torque wrench, and tighten SST (B) clockwise to the specified torque. SST O9820-63010
Torque: **39 Nm (400 kg.cm, 29 ft.lb)**
- c. Check that SST(A) is secured to the pulley shaft.

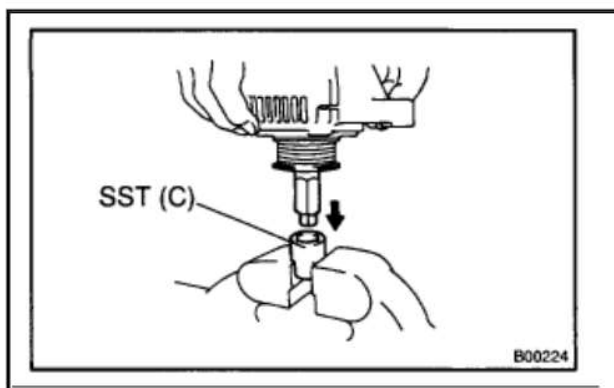

ZOOM

SIZED FOR PRINT


- d. Mount SST (C) in a vise.
- e. Insert SST (B) into SST (C), and attach the pulley nut to SST (C).

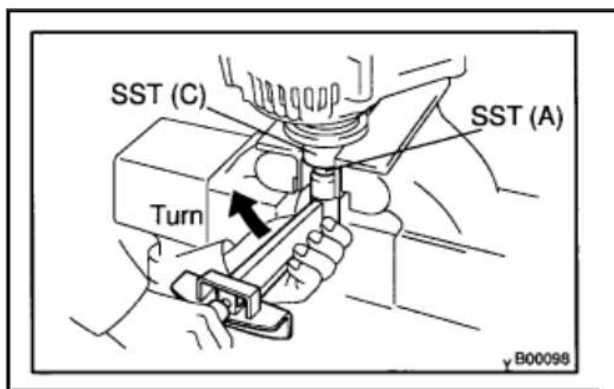

ZOOM

SIZED FOR PRINT


- f. To torque the pulley nut, turn SST (A) in the direction shown in the illustration. Torque: **111 Nm (1,125 kg.cm, 81 ft.lb)**
- g. Remove the generator from SST (C).

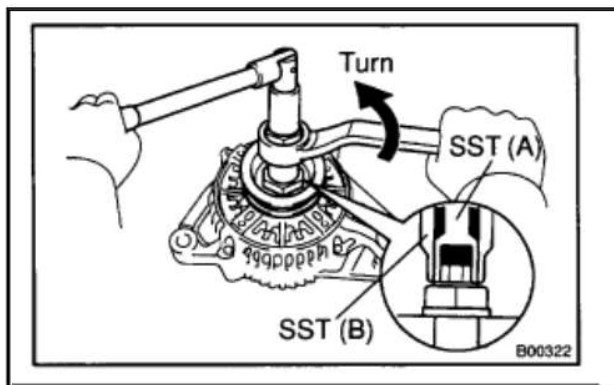

ZOOM

SIZED FOR PRINT

- h. Turn SST (B), and remove SST (A and B).

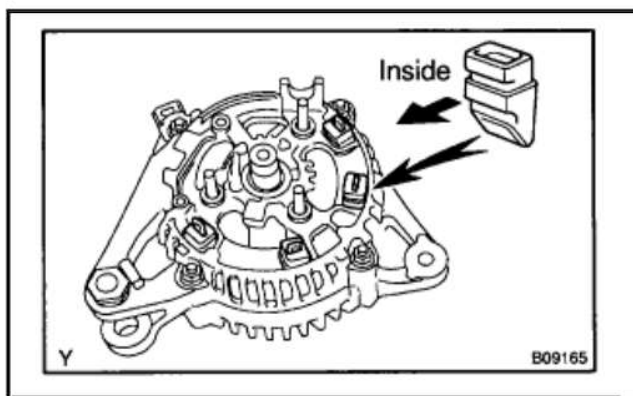


ZOOM

SIZED FOR PRINT

4. INSTALL RECTIFIER HOLDER


- a. Install the 4 rubber insulators on the lead wires. **NOTE:** Be careful of the rubber insulators installation direction.

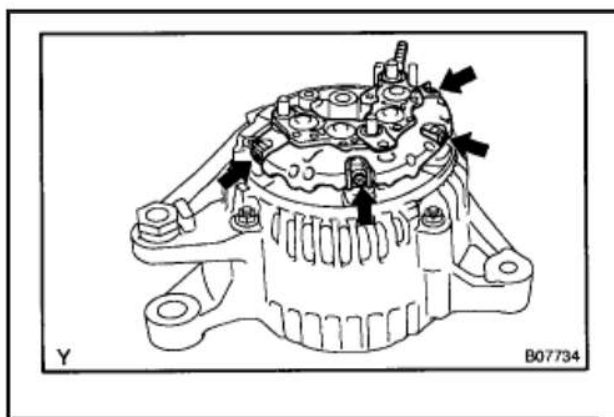

ZOOM

SIZED FOR PRINT

- b. Install the rectifier holder while pushing it with the 4 screws Torque: **2.9 Nm (30 kg.cm, 26 in.lb)**

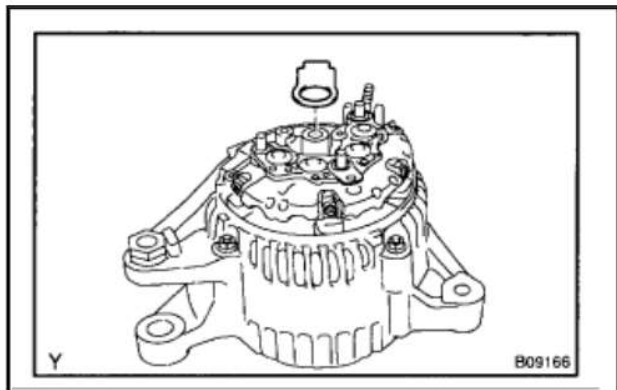


ZOOM

SIZED FOR PRINT

5. INSTALL [VOLTAGE REGULATOR](#) AND [BRUSH HOLDER](#)


- a. Place the seal plate on the rectifier end frame.

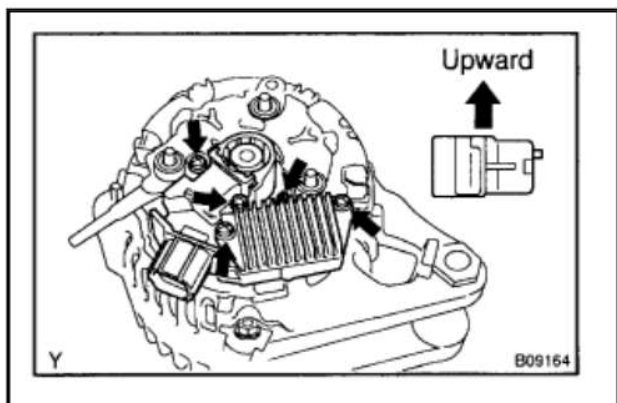

ZOOM

SIZED FOR PRINT

- b. Place the [voltage regulator](#) and [brush holder](#) on the rectifier end frame. **NOTE:** Be careful of the holder installation direction.
- c. Install the 5 screws. Torque: **2.0 Nm (20 kg.cm, 18 in.lb)**

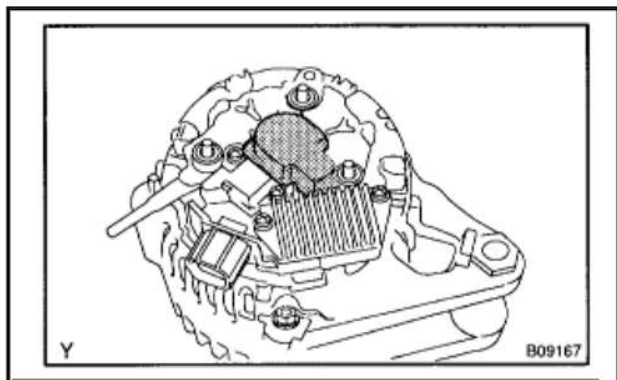


Page 9 of 9

ZOOM

SIZED FOR PRINT

- d. Place the [brush holder](#) cover on the brush holder.

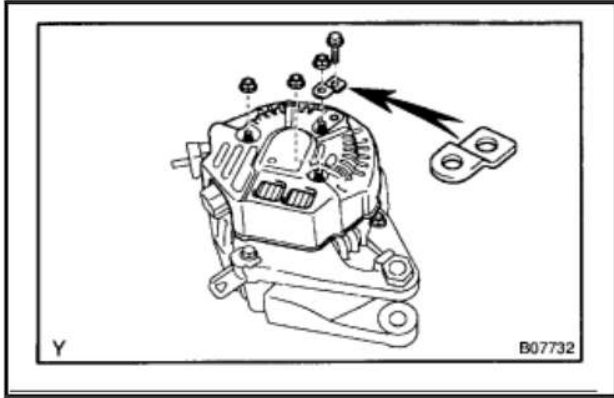

ZOOM

SIZED FOR PRINT

6. INSTALL REAR END COVER

- a. Install the end cover and plate terminal with the bolt and 3 nuts.

Torque:

Nut **4.4 Nm (45 kg.cm, 39 in.lb)**

Bolt **3.9 Nm (39 kg.cm, 35 in.lb)**

- b. Install the terminal insulator with the nut. Torque: **4.1 Nm (42 kg.cm, 36 in.lb)**

7. CHECK THAT [ROTOR](#) ROTATES SMOOTHLY